



MINISTRY OF ENERGY AND PETROLEUM
Nairobi
Republic of Kenya



THE WORLD BANK Investment Project Financing Kenya: Off-grid Solar
Access Project for Underserved Counties (P160009)



Kenya Power



**RURAL ELECTRIFICATION & RENEWABLE ENERGY
CORPORATION**

Environmental & Social Impact Assessment, Social
Assessment

KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES

ESIA REPORT FOR THE PROPOSED NACHUKUI OFF-GRID SOLAR PROJECT



Date: 2023



CERTIFICATION

This ESIA project report for the proposed Nachukui Off-Grid Solar Project was prepared in accordance with the Environmental Management and Coordination Act (EMCA), 1999 and the Environmental (Impact Assessment and Audit) regulations, 2003 and their subsequent amendments EMCA (amendments), 2015 and EIA/EA regulations (amendments), 2019, the World Bank operational procedures (OP) and Environmental Safeguards Standards (ESS) for submission to the National Environment Management Authority (NEMA). We hereby certify that to the best of our knowledge and belief, the information and particulars provided in this report are correct and true.

Name and Address of Firm of Experts:

 Norken International Ltd ENGINEERING AND MANAGEMENT CONSULTANTS P. O. Box 9882 - 00100 Nairobi, Kenya Tel. 254 020 2248762 Registration No. of Firm of Experts: 0181	 CENTRIC AFRICA LTD P.O. Box 102081-00101 Nairobi, Kenya Tel. +254718068517 Registration No. of Firm of Experts: 7112
--	--

Name and Address of Firm of Experts:

Signed: _____ Date: _____
Isaiah B. Kegora
Lead EIA/EA Expert (NEMA Reg. No 1893)
For: Norken International Ltd & Centric Africa Ltd

Name and Address of the Proponent:

Ministry of Energy,
P.O. Box 30582-00100,
Kawi Complex, Nairobi, Kenya

Signed: _____ Date: _____

Rodney I. Sultani
Project Co-ordinator – KOSAP

Disclaimer:

This ESIA report is strictly confidential to MoE (the Proponent) and any use of the materials thereof should strictly be in accordance with the agreement between the Proponent and the consultants; Norken International Limited and Centric Africa Limited (the Environmental Impact Assessor). It is, however, subject to conditions in the Environmental (Impact Assessment and Audit) Regulations, 2003 under the Kenya Gazette Supplement No. 56 of 13th June 2003

CONTENTS

CERTIFICATION		I
EXECUTIVE SUMMARY		1
1	INTRODUCTION	10
1.1	CONTEXT	10
1.2	PROJECT OVERVIEW	11
1.3	PURPOSE AND SCOPE OF WORK	12
1.4	ESIA METHODOLOGY	12
1.4.1	SCREENING AND SCOPING	12
1.4.2	ENVIRONMENTAL IMPACT ASSESSMENT	12
1.4.3	ENVIRONMENTAL, SOCIAL MANAGEMENT AND MONITORING PLAN (ESMMP)	14
1.4.4	TARGET GROUP FOR THE ESIA REPORT	15
1.4.5	STUDY TEAM	15
1.5	LIMITATIONS/UNCERTAINTIES	16
1.6	LAYOUT OF THE REPORT	16
2	PROJECT DESCRIPTION	18
2.1	INTRODUCTION	18
2.2	PROJECT LOCATION	19
2.2.1	PROJECT SITE SETTING	20
2.3	DESCRIPTION OF PROJECT FACILITIES, COMPONENTS AND ACTIVITIES	21
2.3.1	PROJECT COMPONENTS	21
2.4	RESOURCE REQUIREMENT	24
2.4.1	WORKFORCE REQUIREMENT	24
2.4.2	WATER REQUIREMENT AND SOURCE	24
2.4.3	RAW MATERIAL REQUIREMENT	24
2.4.4	POWER REQUIREMENT	25
2.4.5	FIRE SAFETY AND SECURITY	25
3	ANALYSIS OF ALTERNATIVES AND PROJECT JUSTIFICATION	26
3.1.1	SITE SELECTION	26
3.1.2	POWER SCENARIO IN NACHUKUI	26
3.1.3	ALTERNATIVE SOURCES OF ENERGY	27
3.1.4	ZERO OR NO PROJECT ALTERNATIVE	27
3.1.5	ALTERNATE LOCATION FOR PROJECT SITE	28
3.1.6	ANALYSIS OF ALTERNATIVE CONSTRUCTION MATERIALS AND TECHNOLOGY	29
3.1.7	SOLID WASTE MANAGEMENT ALTERNATIVES	29
3.1.8	CONCLUSION	29
4	APPLICABLE AND REGULATORY FRAMEWORK	30
4.1	INTRODUCTION	30
4.2	KENYA ELECTRICITY SUPPLY INDUSTRY (ESI)	30
4.3	NATIONAL LEGAL FRAMEWORK REVIEW	31
4.3.1	ADMINISTRATIVE FRAMEWORK	48
4.4	INTERNATIONAL SAFEGUARDS REQUIREMENTS	49
5	BASELINE SETTINGS - ENVIRONMENT, ECOLOGY AND SOCIAL	51
5.1	AREA OF INFLUENCE	51
5.1.1	PROJECT FOOTPRINT AREA	52
5.2	ENVIRONMENT BASELINE	52
5.2.1	LAND AND LAND USE	52
5.2.2	TOPOGRAPHY	53
5.2.3	HYDROGEOLOGY AND DRAINAGE	53

5.2.4	ECOLOGY	54
5.2.5	WATER RESOURCES	54
5.2.6	AMBIENT AIR QUALITY	55
5.2.7	AMBIENT NOISE QUALITY	55
5.2.8	SOIL TYPE	55
5.2.9	CLIMATE AND METEOROLOGY	55
5.3	SOCIO-ECONOMIC ENVIRONMENT	56
5.3.1	SOCIO-ECONOMIC STATUS OF STUDY AREA	56
6	STAKEHOLDER ENGAGEMENT	62
6.1	STAKEHOLDER CONSULTATION AND DISCLOSURE REQUIREMENT FOR THE PROJECT	62
6.2	STAKEHOLDER CHARACTERISATION AND IDENTIFICATION	62
6.2.1	STAKEHOLDER MAPPING	63
6.3	STAKEHOLDER ANALYSIS	63
6.4	KEY FEEDBACK RECEIVED DURING COMMUNITY CONSULTATIVE MEETING LEADINS TO LAND IDENTIFICATION AND GRC CONSTITUTION – SCREENING LEVEL	64
6.4.1	PROJECT LAND REQUIREMENTS: RIGHTS AND ENTITLEMENTS OPTIONS AND IMPLICATIONS	65
6.4.2	PROJECT TECHNICAL DESCRIPTION, WIRING, CONNECTION AND PAYMENTS	67
6.4.3	SOCIAL AND ENVIRONMENTAL ISSUES	67
6.4.4	GRIEVANCE RESOLUTION MECHANISM (GRM)	68
6.4.5	EXISTING INDIGENOUS GRIEVANCE REDRESS MECHANISM	68
6.4.6	FOCUS GROUP DISCUSSIONS	69
6.4.7	REVIEW OF FEEDBACK FROM FGDs BY ALL COMMUNITY MEMBERS.	70
6.5	KEY FEEDBACK RECEIVED DURING ESIA STAKEHOLDER CONSULTATION	70
6.5.1	PROJECT BENEFITS	72
6.5.2	COMMUNITY MAIN CONCERNS	72
6.5.3	COMMUNITY REQUESTS	72
6.6	SUMMARY FEEDBACK RECEIVED DURING FOCUSED GROUP DISCUSSION	73
6.7	GRIEVANCE REDRESS MECHANISM	77
6.7.1	GRIEVANCE MECHANISM AT NACHUKUI.	77
7	IMPACT ASSESSMENT AND MITIGATION MEASURES	78
7.1	INTRODUCTION	78
7.2	IMPACT ASSESSMENT METHODOLOGY	78
7.3	DEFINING IMPACT	78
7.4	ASSESSMENT OF SIGNIFICANCE	78
7.5	MAGNITUDE OF IMPACT	81
7.6	SENSITIVITY OF RESOURCES AND RECEPTORS	81
7.7	LIKELIHOOD	82
7.8	DEFINITION OF MITIGATION MEASURES	82
7.9	ASSESSING RESIDUAL IMPACTS	83
7.10	POSITIVE IMPACTS DURING CONSTRUCTION PHASE	83
7.10.1	CREATION OF EMPLOYMENT OPPORTUNITIES	83
7.10.2	IMPROVING LOCAL ECONOMY	83
7.11	POSITIVE IMPACTS DURING OPERATION PHASE	84
7.11.1	QUALITY, RELIABLE POWER SUPPLY	84
7.11.2	EMPLOYMENT CREATION	84

7.11.3	REDUCTION OF POLLUTION ASSOCIATED WITH THERMAL POWER GENERATION, KEROSENE AND WOOD FUEL USAGE:	84
7.11.4	IMPROVEMENT OF LOCAL AND NATIONAL ECONOMY	85
7.11.5	EDUCATION	85
7.11.6	HEALTH BENEFITS OF THE PROJECT	85
7.11.7	IMPROVED STANDARD OF LIVING	86
7.11.8	SECURITY	86
7.11.9	COMMUNICATIONS	86
7.12	POSITIVE IMPACTS DURING DECOMMISSIONING PHASE	86
7.12.1	EMPLOYMENT OPPORTUNITIES	86
7.12.2	SITE REHABILITATION	86
7.13	NEGATIVE IMPACTS DURING PRE-CONSTRUCTION PHASE	86
7.13.1	LAND TAKE	86
7.14	KEY ENVIRONMENTAL IMPACTS – CONSTRUCTION PHASE	87
7.14.1	LAND TAKE	87
7.14.2	EMBEDDED/IN-BUILT CONTROL	87
7.14.3	IMPACT ON TOPOGRAPHY	87
7.14.4	IMPACT ON SOIL ENVIRONMENT	88
7.14.5	IMPACT ON AIR QUALITY	89
7.14.6	IMPACT ON AMBIENT NOISE	89
7.14.7	ASSESSMENT CRITERIA FOR IMPACT ON AMBIENT NOISE	90
7.14.8	VISUAL INTRUSIONS AND CHANGES IN LANDSCAPE IMPACT	90
7.14.9	VEGETATION CLEARANCE	92
7.14.10	SOIL EROSION IMPACT	93
7.14.11	POLLUTION FROM SOLID WASTE GENERATION	94
7.14.12	NOISE AND VIBRATION	94
7.14.13	IMPACTS FROM HAZARDOUS MATERIALS	95
7.14.14	FIRE HAZARDS	95
7.14.15	IMPACTS OF CONSTRUCTION MATERIAL SOURCING (E.G., QUARRYING)	96
7.14.16	INCREASED WATER DEMAND	96
7.14.17	ENERGY CONSUMPTION	97
7.14.18	OCCUPATIONAL HEALTH AND SAFETY IMPACTS	97
7.15	KEY SOCIAL IMPACTS – CONSTRUCTION PHASE	98
7.15.1	LAND UPTAKE-COMMUNAL LAND	98
7.15.2	IMPACT ON OCCUPATIONAL HEALTH AND SAFETY	98
7.15.3	IMPACT ON LOCAL ECONOMY AND EMPLOYMENT	100
7.15.4	COMMUNITY HEALTH AND SAFETY	100
7.15.5	LABOUR INFLUX	101
7.15.6	CHILD LABOUR	102
7.15.7	IMPACTS ON CULTURAL HERITAGE	103
7.15.8	GENDER BASED VIOLENCE, SEA & SH	104
7.15.9	EXCLUSION OF VMGS, VULNERABLE INDIVIDUALS AND HOUSEHOLDS	105
7.15.10	RISK OF COMMUNICABLE DISEASES; HIV/AIDS	106
7.15.11	RISKS RELATED TO INADEQUATE STAKEHOLDER ENGAGEMENT	106
7.15.12	COMMUNITY SAFETY -ACCESS TO SITE BY GENERAL PUBLIC	107
7.15.13	INCREASE IN COMPETITION FOR SCARCE RESOURCES AND STRAIN ON PUBLIC UTILITIES	107
7.15.14	COVID-19 AMONGST WORKERS AND THE COMMUNITY	108
7.16	KEY ENVIRONMENTAL IMPACTS – OPERATION PHASE	109
7.16.2	IMPACT ON WATER ENVIRONMENT	110
7.16.3	LANDSCAPE AND VISUAL IMPACTS	110
7.17	KEY ECOLOGICAL IMPACT- OPERATION PHASE	111

7.17.1	COLLISION AND ELECTRICAL HAZARDS FROM DISTRIBUTION INFRASTRUCTURE	111
7.18	KEY SOCIAL IMPACTS – OPERATIONS PHASE	112
7.18.1	IMPACT ON ECONOMY AND EMPLOYMENT	112
7.18.2	OCCUPATIONAL, HEALTH AND PUBLIC SAFETY IMPACTS	112
7.19	KEY ENVIRONMENTAL IMPACTS – DECOMMISSIONING PHASE	113
7.20	KEY SOCIAL IMPACTS – DECOMMISSIONING PHASE	113
7.20.1	IMPACT ON ECONOMY AND EMPLOYMENT	113
7.21	CUMULATIVE IMPACTS	113
7.21.1	CUMULATIVE IMPACT ASSESSMENT	113
8	IMPACT SUMMARY AND CONCLUSION	179
8.1	INTRODUCTION	179
8.2	SUMMARY OF IMPACTS IDENTIFIED AND ASSESSED	179
8.2.1	CONSTRUCTION PHASE IMPACTS	179
8.2.2	OPERATIONAL PHASE IMPACTS	179
8.3	SA AND VMGP CONCLUSION	179
8.4	CONCLUSION AND RECOMMENDATIONS	180
9	APPENDICES	181
	APPENDIX 1 – PUBLIC MEETING PARTICIPANTS’ REGISTER	181
	APPENDIX 2 – MEN FGD LIST OF ATTENDANCE	195
	APPENDIX 3 – YOUTH FGD LIST OF ATTENDANCE	197
	APPENDIX 4 – FIRST MEETING MINUTES/LAND ACQUISITION MEETING	201
	APPENDIX 5 ABBREVIATED RESETTLEMENT ACTION PLAN (A-RAP)	209
	APPENDIX 6 – NEMA PRACTISING CERTIFICATES	214

List of Tables

Table 1: Summary of Pre-construction Impacts	5
Table 2: Summary of Construction Phase Impacts	7
Table 3: Summary of Operation Phase Impacts	7
Table 4: Summary of Decommissioning Impacts	8
Table 5: Structure of the ESIA Report	16
Table 6: Summary Information of the proposed Nachukui Solar Mini-grid	18
Table 7: National Legal Framework	32
Table 8. Administrative stakeholders and their roles	48
Table 9. World Bank Operational OPs to the proposed project	49
Table 10: Summary of the Demographic profile	57
Table 11: Identified stakeholders	62
Table 12: Stakeholder Significance and Engagement Requirement	63
Table 13: Summary of Stakeholder Influence	64
Table 14: FGD dates and attendance	73
Table 15: Categories of Significance	79
Table 16: Overall Significance Criteria for Environmental Impacts	81
Table 17: Explanation of Terms Used for Likelihood of Occurrence	82
Table 18 Environmental Social Management And Monitoring Plan.	7-115

List of Figures

Figure 1: Map showing the exact location of the site	12
Figure 2: Summary of Environmental and Social Impact Assessment Methodology	15
Figure 3: Project Location	19
Figure 4: Map Showing the KOSAP Counties Lot 1	20
Figure 5: Profile of the Proposed Mini Grid	26

List of Plates

Plate 1: Project site picture	20
Plate 2: Nachukui Centre	53
Plate 3: Floral representation of the area	54
Plate 4: Resident fetching water from Lake Turkana	55
Plate 5: Main Housing types	56
Plate 6: Nachukui Primary School	58
Plate 7: Fishing Boats and available fishing gears	59
Plate 8: One of the churches in the area	61
Plate 9: Public participation session.	73
Plate 10: Plate 9: Male FGD session	76

List of Appendices

APPENDIX 1 – PUBLIC MEETING PARTICIPANTS' REGISTER	181
APPENDIX 2 – MEN FGD LIST OF ATTENDANCE	195
APPENDIX 3 – YOUTH FGD LIST OF ATTENDANCE	197
APPENDIX 4 – WOMEN FGD LIST OF ATTENDANCE	199
APPENDIX 5 – FIRST MEETING MINUTES/LAND ACQUISITION MEETING	201
APPENDIX 6 – ARAP	209

Abbreviations

ACRONYM	DEFINITION
ADR	Alternative Dispute Resolution
Aoi	Area of Influence
CBOs	Community Based Organizations
CoK	Constitution of Kenya
CDI	County Development Index
CEMP	Construction Environmental Management Plan
CGRCs	County Grievance Redress Committees
CRA	Commission on Revenue Allocation
CSR	Customer Social Responsibility
CIDP	County Integrated Development Plan
CPS	Country Partnerships Strategy
DOSHS	Directorate of Occupational Safety and Health Services
EHS	Environment Health and Safety
EIA	Environmental Impact Assessment
EPRA	Energy Petroleum Regulatory Authority
EPT	Energy and Petroleum Tribunal
EPRA	Energy and Petroleum Regulatory Authority
ESI	Electrical Supply Industry
ESIA	Environmental and Social Impact Assessment
ESMF	Environmental and Social Management Framework
ESMP	Environmental and Social Management Plan
ESMMP	Environmental and Social Management and Monitoring Plan
EMCA	Environmental Management and Coordination Act
EMF	Electromagnetic Field
FGD	Focus Group Discussions
GDC	Geothermal Development Company
GoK	Government of Kenya
HDPE	High Density Poly Ethylene
IAs	Implementing Agencies
IPPs	Independent Power Procedures
IPs	Indigenous Peoples
JV	Joint Venture
KETRACO	Kenya Electricity Transmission Company
KII	Key Informant Interviews
KOSAP	Kenya Off-Grid Solar Access Project
KPLC	Kenya Power and Lighting Company
LEP	Labour and Employment Plan
LGRCs	Local Grievance Redress committee
MGs	Mini Grids
MOE	Ministry of Energy
MSDS	Material Safety Datasheet
NEMA	National Environmental Management Authority
NGOs	Non-Governmental Organizations
NLC	National Land Commission
NTSA	National Transport and Safety Authority
OHS	Occupational Health and Safety

OM	Operation and Maintenance
OP	Operational Policies
PAD	Project Appraisal Document
PAPs	Project Affected Persons
PCU	Project Co-ordination Unit
PPAs	Power Purchase Agreements
PPEs	Personal Protective Equipment
PV	Photo-voltaic
REREC	Rural Electrification and Renewable Energy Corporation
RPF	Resettlement Policy Framework
SA	Social Assessment
SEA	Strategic Environmental Assessment
SERC	Standards and Enforcement Review Committee
SHS	Solar Home Systems
SIA	Social Impact Assessment
SOP	Safe Operation Procedure
STDs	Sexually Transmitted Diseases
STI	Science, technology and innovation
SMMP	Social Management and Monitoring Plan
ToR	Terms of Reference
VMGF	Vulnerable and Marginalised Groups Framework
VMGs	Vulnerable and marginalized groups
VMGP	Vulnerable and Marginalised Group Plan
WB	World Bank
WMP	Waste Management Plan
WRA	Water Resources Authority

E1- Introduction and Project Brief

The Ministry of Energy (MOE) hereinafter refer to as proponent is implementing the Kenya Off-Grid Solar Access Project (KOSAP) in 14 underserved counties in Kenya. The aim of the project is to provide clean and modern energy services through off-grid solar solutions. The Proponent is coordinating the implementation of the project through the implementing agencies; Kenya Power (KP) and the Rural Electrification and Renewable Emergency Corporation (REREC). The project is funded by the World Bank Group with \$150 million and a \$5 million grant from the Carbon Initiative for Development. The goal of the project is to bring electricity to around 250,000 households, 476 community facilities, and 380 boreholes in the target counties, benefiting low-income groups. It also includes the sale and installation of 150,000 efficient cook stoves. The project focuses on marginalized areas based on the County Development Index (CDI) and aims to address infrastructure deficits, lack of access to roads, electricity, water, and social services in these underserved counties. To ensure sustainability, the project relies on public funding, local community participation, and the institutional capacity of KP, REREC, and the MOE.

The KOSAP consists of four main components. The first component, focuses on the implementation of mini-grids to provide electricity to community facilities, enterprises, and households in areas where mini-grids are the most cost-effective option. The second component, aims to electrify households through standalone solar systems in areas without load clusters where standalone systems are the best technical and financial solution. The third component, supports the electrification of public institutions and community facilities using standalone solar systems. It also includes the installation of solar PV-powered water pumps for consumptive purposes. Lastly, the fourth component, provides funding for implementation support, technical assistance, and capacity building activities to ensure the sustainability and impact assessment of the interventions carried out under the other components of KOSAP.

In Turkana County, one of the target counties, the Proponent is proposing to develop 32 No. mini grid facilities including Nachukui Mini Grid discussed in this report. In order to adhere to both national and donor requirements, the Proponent engaged the services to the consortium of Norken International Limited and Centric Africa Limited to undertake the ESIA. The ESIA has been conducted following the requirements outlined in the Environmental Management and Coordination Act (EMCA) 1999 and its amendments, as well as international environmental and social policies such as the World Bank's OP 4.01 on environmental assessment.

E- 2 Project Categorisation and Justification

In the World Bank context, there have been several projects supported by the organization that aim to provide electricity to communities located far from the national grid. These projects utilize off-grid approaches, meaning they are independent of a national or regional grid. The experience gained from these projects provides valuable guidance for designing sustainable off-grid electrification initiatives, particularly those targeting dispersed and economically disadvantaged communities. The Nachukui proposed site aligns with this category of projects that the World Bank has been involved in.

In the Kenyan context, the Environmental Management and Coordination Act (EMCA) of 1999, as amended in April 2019 through Legal Notice No. 31, classifies solar power farms and plants as medium risk projects. This categorization provides a framework for assessing and managing the potential environmental and social impacts associated with such projects. By categorizing

the Nachukui site as a solar power facility, it falls within the medium risk project category as per the Kenyan legislative framework.

E- 3 Approach and Methodology

The Environmental and Social Impact Assessment (ESIA) for the proposed project followed a structured process, beginning with kick-off meetings and online discussions involving the Proponent, Implementing agencies, and the World Bank Environmental and Social Safeguard Team. These consultations were instrumental in establishing the project's scope, deliverables, timeline, and methodology. Subsequently, screening and scoping exercises were conducted to evaluate potential social and environmental risks. A thorough desk-based review was also undertaken to assess existing project documentation, legal requirements, and relevant plans.

The study employed a comprehensive approach to gather primary and secondary data for the project. Both qualitative and quantitative methods were utilized, with secondary data obtained through literature reviews. Primary data collection involved various techniques, including physical observations, photography, interviews, and stakeholder consultations. This comprehensive approach enabled a comprehensive examination of the project's environmental and social aspects, ensuring a holistic understanding of its potential impacts.

The study further involved the identification and assessment of potential impacts throughout the project's life cycle. Key areas of evaluation included land use, water resources, biodiversity, air quality, noise levels, community health and safety, and socio-economic conditions. To mitigate adverse effects, the study developed environmental and social management and monitoring plan, aiming to address both positive and negative impacts that may arise from the project. These measures aimed to ensure the project's sustainability and enhance its overall environmental and social performance.

E-4 Proposed Project

The Nachukui Mini Grid project aims to provide electricity to approximately 370 residential and 12 non-residential consumers in Nachukui Village at Nachukui Sub-location, Ngissinger Location in Turkana County. The project will utilize solar photovoltaic panels, a Battery Energy Storage System, and a Diesel Generator to generate electricity.

To store excess solar energy and ensure a continuous and stable power supply, a minimum usable battery capacity of 300 kWh is integrated into the system. A Diesel Generator with a prime rating of 82 kVA is part of the project to provide backup power during periods of low solar generation or high demand. A 2,000-liter fuel tank is included to store diesel fuel for the generator, ensuring uninterrupted power supply during extended periods of low solar generation or other contingencies. With a minimum capacity of 120 kW, PV inverters are used to convert direct current (DC) electricity generated by the solar panels into alternating current (AC) electricity suitable for consumer use. The project utilizes a maximum string inverter capacity of 50 kW to optimize the efficiency of the electricity conversion process. With a minimum capacity of 82 kW, the battery inverter charger manages the flow of energy to and from the battery storage system efficiently, ensuring the overall performance of the system.

A 13-kilometer low voltage power distribution network will be established to efficiently transmit electricity to consumers. This network ensures a stable and reliable power supply while minimizing energy losses. The project features a 1.88-kilometer medium voltage network, which connects the generation sources to the low voltage network, ensuring robust power transmission.

A 100 kVA step-up transformer is included in the project to adjust voltage levels as needed, facilitating power transmission. Two 50 kVA step-down transformers are deployed for further voltage adjustment, ensuring optimal power distribution and accessibility. The project is designed to meet a monthly energy demand of 12,200 kWh, effectively addressing the specific energy needs of both residential and non-residential consumers. A daily energy demand of 407 kWh is proposed, ensuring a consistent and stable power supply for various applications. The system is tailored to accommodate a peak demand of 76 kW, effectively addressing high-demand periods and ensuring uninterrupted access to electricity. The estimated cost of the project is around USD 509,008, although this amount may change as more detailed plans are developed.

The project consists of two main components: Hybrid Mini-Grids and power line reticulation lines. The Hybrid Mini-Grids will combine solar panels and diesel power generation. These energy sources will be integrated through a centralized photovoltaic plant connected to a 3-phase AC busbar line. The configuration is designed to prioritize direct supply from the solar generator during daylight hours, reducing reliance on battery storage. The battery storage will primarily be used when solar generation is low or demand is high. The construction of power line reticulation lines will ensure the efficient distribution of electricity to residential, commercial, and other consumers, ensuring a reliable and efficient power supply.

To develop the Mini Grid, approximately 1.252 hectares of land will be compulsorily acquired by NLC. This land is part of the community's designated public purposes area. The Proponent engaged with the community during the land acquisition process, and there were no objections to transferring 1.252 hectares of land to Kenya Power and Lighting Company (KPLC) for the management of the solar mini-grid. In accordance with the World Bank's Operation Procedure 4.12 on Involuntary Resettlement, an abbreviated Resettlement Action Plan (A-RAP) was prepared, outlining the principles and procedures for land acquisition and compensation. This plan is annexed to the project report.

E-5 Analysis of Alternatives

Solar energy is identified as a non-polluting and site-specific option, and the proposed site for Nachukui MG is chosen as the most suitable location for the mini-grid based on factors such as sunlight availability and the community's lack of grid connectivity. The use of wind power, thermal power, fossil fuels, and power import from neighbouring countries are considered as alternative methods of power generation but are found to have limitations or environmental concerns. Solar energy is favoured due to its low production costs, versatility, clean nature, and economic savings. The "No Project" alternative is deemed unfavorable as it would maintain the current lack of electricity access and hinder socio-economic development. The project will be constructed using modern materials and technology, with a focus on public health, safety, security, and environmental requirements. The technology will involve a Battery Energy Storage System.

E-6 Baseline Information

The project area in Nachukui Sub-location, Turkana County, exhibits a semi-arid climate with irregular rainfall patterns and scarce natural resources. Water scarcity poses a significant challenge, affecting both the local population and livestock. The vegetation predominantly comprises drought-tolerant shrubs, thorny bushes, and arid-adapted grasses. Overgrazing and deforestation have resulted in land degradation and soil erosion, further exacerbating the environmental issues. Agricultural practices face hurdles due to limited fertile soils and

inadequate irrigation infrastructure. The region is also prone to natural hazards like flash floods and sandstorms.

The topography of the project area is diverse, featuring vast plains, scattered low-lying hills, and occasional rocky outcrops. It is part of a semi-arid landscape with undulating terrain. The flat plains offer space for livestock grazing, while the hills provide some relief and shelter. However, the irregular topography poses challenges to agriculture and water management, influencing water runoff and drainage patterns. Overall, the project site is relatively flat.

The area is characterized by high levels of poverty, unemployment, and limited access to essential services such as education and healthcare. Livestock herding and small-scale enterprises are the primary economic activities, but opportunities for economic growth are constrained. Gender disparities persist, with women having limited decision-making power and economic empowerment. Infrastructure development, including roads, electricity, and water supply, is insufficient to meet the needs of the community.

E-7 Legislative regulatory Framework

The evaluation, planning, and implementation of the proposed project is guided by the World Bank's Environmental and Social Framework, the national legislative framework, and the project's safeguard instruments. These measures aim to ensure environmental sustainability, protect the rights and needs of indigenous peoples and marginalized groups, and minimize adverse impacts through effective management and mitigation measures.

The Government of Kenya established the Environmental Management and Coordination Act (EMCA) in 1999, providing a legal framework for environmental management. EMCA takes precedence over other sectoral laws related to the environment. In 2013, the government formulated a national Environmental Policy with the goal of promoting sustainable management and use of the environment.

Collaboration and consultation among government agencies and stakeholders are essential for coordinating environmental management effectively. Key institutions in Kenya responsible for environmental issues include the National Environment Management Authority (NEMA), County Environment Committees, National Environmental Complaints Committee, National Environment Action Plan Committee, Standards and Enforcement Review Committee, National Environment Tribunal, and National Environment Council (NEC).

The project also adheres to the World Bank Safeguard Policies, which aim to improve decision-making processes, promote sustainable project options, and involve affected people in consultations. The applicable operational policies for this project include Environment Assessment, Natural Habitats, Indigenous Peoples, and Involuntary Resettlement. The Environmental and Social Impact Assessment (ESIA) considers these policies and addresses potential environmental and social concerns.

Additionally, the ESIA references other Safeguard Instruments prepared under the Kenya Off-Grid Solar Access Project (KOSAP), including the Environmental and Social Management Framework (ESMF), Resettlement Policy Framework (RPF), and Vulnerable and Marginalized Groups Framework (VMGF). These instruments provide procedures and guidelines for assessing and managing environmental and social aspects specific to the proposed subprojects under KOSAP.

E-8 Stakeholder Engagement

It is important to highlight that two forms of stakeholder engagement were carried out for the project. The first form as noted earlier, focused on the acquisition of land for the project and

involved the Proponent and the implementing agency (KP). The second form of engagement was conducted specifically for the Environmental and Social Impact Assessment (ESIA) study.

For the ESIA study, various methods were employed to engage stakeholders, taking into consideration their different categories. Face-to-face discussions were held with government officials and key stakeholders, while separate focused group discussions were conducted with men, women, and youth. Additionally, a public baraza or meeting was organized to allow community members to participate.

During the ESIA stakeholder engagement public meeting, which took place on January 15, 2022, a total of 160 stakeholders attended. The meeting provided an opportunity to discuss project details, including the preliminary design, positive and negative impacts, and mitigation measures. Stakeholders were encouraged to share their views and provide feedback on the project.

Some of the concerns raised by stakeholders included the type of fence to be constructed around the project site, the treatment of the community regarding the land acquired for the mini-grid construction, and the connection of community boreholes to electricity. The study team addressed these concerns by assuring stakeholders that a chain-link fence supported by concrete poles would be constructed. They also stated that additional projects would be undertaken for the community as compensation, based on their priorities. Furthermore, public facilities such as schools, health centers, and boreholes would be connected to the electricity supply.

E-10 – Impacts and Mitigation Measures

The Environmental and Social Impact Assessment (ESIA) for the proposed Solar Mini-grid project has identified both positive and negative impacts across its different phases: pre-construction, construction, operation, and decommissioning. In the construction phase, positive impacts include local employment opportunities, boosting local businesses, and sourcing materials locally. During the operation phase, positive impacts encompass reliable power supply, economic improvement, education, health benefits, improved living standards, and enhanced security and communication. Similarly, the decommissioning phase offers positive impacts such as local employment and sourcing.

On the negative side, the pre-construction phase involves minor impacts like land acquisition, while the construction phase encompasses various minor to moderate impacts such as vegetation clearance, soil erosion, dust emissions, and occupational health and safety concerns. Challenges related to stakeholder engagement, labor influx, child labor, and exclusion of vulnerable individuals are also anticipated. In the operation phase, negative impacts include waste generation, increased oil consumption, fire outbreaks, occupational health and safety concerns, and inadequate stakeholder engagement. Issues of exclusion, inadequate grievance management, and public health concerns may arise as well.

During the decommissioning phase, negative impacts primarily relate to solid waste generation, noise and vibration, and challenges in stakeholder engagement, labor influx, child labor, gender-based violence, and exclusion of vulnerable individuals and households.

Tables 1 to 3 below present summaries of anticipated impacts and their corresponding levels of significance, both pre- and post-mitigation.

Table 1: Summary of Pre-construction Impacts

Impact	Significance Of Impact (Pre-Mitigation)	Residual Impacts (Post-Mitigation)
Land acquisition	Minor	Negligible

Impact	Significance Of Impact (Pre-Mitigation)	Residual Impacts (Post-Mitigation)
Way leaves	Minor	Negligible
Stakeholder identification and consultations	Major	Minor

Table 2: Summary of Construction Phase Impacts

Impact	Significance Of Impact (pre-mitigation)	Residual Impacts (Post-Mitigation)
Impacts on Local Economy and Employment	Positive	Positive
Change in land use	Moderate	Negligible
Topography	Minor	Negligible
Soil environment	Minor	Negligible
Air Quality	Moderate	Negligible
Ambient noise	Minor	Negligible
Visual intrusion and change in landscape	Minor	Negligible
Waste generation and soil contamination	Minor	Negligible
Impact on water environment	Minor	Negligible
Impacts from hazardous materials	Minor	Negligible
Fire hazards	Moderate	Minor
Impacts of construction material sourcing	Moderate	Minor
Energy consumption	Negligible	Negligible
Occupational safety and health	Moderate	Minor
Community safety and health	Moderate	Minor
Labor influx	Minor	Negligible
Child labor	Minor	Negligible
Cultural heritage	Minor	Negligible
Gender based violence, SEA and SH	Minor	Negligible
Exclusion of VMGs, Vulnerable individuals and households	Major	Minor
Risk of communicable diseases	Minor	Negligible
Increased water demand	Negligible	Negligible
Forced labor	Minor	Negligible

Table 3: Summary of Operation Phase Impacts

Impact	Significance Of Impact (Pre-Mitigation)	Residual Impacts (Post-Mitigation)
Impact On Economy and Employment	Positive	Positive
Quality, reliable power supply	Positive	Positive
Reduction of pollution associated with thermal power generation, kerosene and wood fuel usage	Positive	Positive
Education	Positive	Positive
Health benefits	Positive	Positive
Improved standard of living	Positive	Positive
Security	Positive	Positive
Communication	Positive	Positive
Soil environment	Minor	Negligible
Waste generation and management	Minor	Negligible

Impact	Significance Of Impact (Pre-Mitigation)	Residual Impacts (Post-Mitigation)
Water environment	Negligible	Negligible
Landscape and visual impacts	Minor	Negligible
Increased oil consumption	Minor	Negligible
Increased storm water flow	Minor	Negligible
Fire outbreaks	Moderate	Minor
Water demand	Negligible	Negligible
Sanitary waste	Negligible	Negligible
Flooding	Negligible	Negligible
Noise and Vibration	Negligible	Negligible
Electric and magnetic fields (EMFs)	Negligible	Negligible
Dust Emission	Negligible	Negligible
Vehicle Exhaust emission	Minor	Negligible
Collision and electrical hazards from distribution infrastructure	Minor	Negligible
Occupational safety and health	Moderate	Minor
Community safety and health	Moderate	Minor
Gender based violence, SEA and SH	Minor	Negligible
Exclusion of VMGs, Vulnerable individuals and households	Major	Minor
Risk of communicable diseases	Minor	Negligible
Shocks and electrocution to the beneficiaries	Moderate	Minor
Risks related to poor and inadequate stakeholder engagement (conflict)	Minor	Negligible

Table 4: Summary of Decommissioning Impacts

Impact	Significance Of Impact (Pre-Mitigation)	Residual Impacts (Post-Mitigation)
Employment opportunities	Positive	Positive
Site rehabilitation	Positive	Positive
Soil environment	Minor	Negligible
Air quality	Moderate	Negligible
Ambient Noise	Minor	Negligible
Waste generation and soil contamination	Minor	Negligible
Occupational safety and health	Moderate	Minor
Gender based violence, SEA and SH	Minor	Negligible
Exclusion of VMGs, Vulnerable individuals and households	Major	Minor
Risk of communicable diseases	Minor	Negligible

E-11 Environmental and Social Management and Monitoring Plan

A comprehensive set of mitigation measures in the form of an Environmental and Social Management and Monitoring Plan (ESMMP) have been prepared for the project. The ESMMP serves as a comprehensive framework for the integrated management of all environmental and

social impacts throughout the project's lifecycle. It has been prepared to ensure that the social and environmental impacts and risks identified during the Environmental and Social Impact Assessment (ESIA) process are appropriately managed during the construction, operations, and decommissioning phases of the project. It specifies the mitigation and management measures that the project proponent and contractor are committed to implementing and outlines how organizational capacity and resources will be mobilized to achieve these measures. The ESMMP also ensures compliance with the relevant laws, regulations within Kenya, as well as the environmental and social sustainability requirements of the World Bank's Operational Policies (OPs).

These measures emphasize a proactive approach, prioritizing prevention rather than reaction. They encompass various aspects such as proper waste handling and disposal to prevent pollution, engaging stakeholders to address grievances, providing personal protective equipment (PPE) for workers, ensuring adequate supervision, and emphasizing good workmanship from the contractor. Specific plans are also outlined to address specific issues that may arise. The ESMMP also highlights environmental performance indicators that should be regularly monitored. Monitoring serves as a means to detect and draw attention to any changes or problems in environmental quality. It involves continuous or periodic reviews of the ESMMP implementation progress, allowing for adjustments and improvements as necessary.

While accommodating the recommended mitigation measures to the extent practical and economically viable, the project proponent and contractor should ensure that the measures do not compromise the economic viability of the project or have long-lasting adverse impacts on the environment.

For the mitigation measures to be successful, it is imperative that the Kenya Power and Lighting Company (KPLC) allocates sufficient resources for the implementation of the ESMMP. Adequate resources will enable the proper execution of the proposed measures and ensure their effectiveness in minimizing the identified negative impacts.

Following the project's commissioning, it is mandatory to conduct statutory Environmental and Safety Audits in accordance with national legal requirements. These audits serve to evaluate the environmental performance of the site operations and assess their compliance with the recommended mitigation measures.

E- 12 Conclusion

Based on the assessment findings, the consultant concludes that there are no substantial reasons to hinder the proposed project from progressing to the next stage of planning and development. However, this progression is conditional upon the implementation of the recommended mitigations and the monitoring of potential environmental and socio-economic impacts as outlined in the ESMMP.

It is in the opinion of the Environmental expert that the anticipated negative impacts can readily and effectively be mitigated and on the whole the proposed project does not pose any significant threat to the Environment and may be licensed to proceed.

1 INTRODUCTION

The Ministry of Energy (MOE) Kenya is coordinating the implementation of the Kenya Off-Grid Solar Access Project (KOSAP) to provide access to clean and modern energy services through off-grid solar to 14 underserved counties. Mandera, Wajir, Garissa, Tana River, Turkana, Isiolo, Marsabit, West Pokot, Turkana, Taita Taveta, Kwale, Kilifi and Lamu.

K-OSAP directly promotes the achievement of these objectives by supporting the use of solar and clean cooking Solutions to drive electrification of households (including host communities), enterprises, community facilities, and water pumps in Turkana County as one of the counties in Kenya that have been defined as “marginalized areas” based on the County Development Index (CDI) by the Commission on Revenue Allocation (CRA). According to the CRA as the communities in the marginalized areas have been excluded from social and economic life of Kenya for different reasons” (CRA, 2013).

Turkana County and other identified underserved counties, collectively represent 72% of the Country’s total land area and 20% of the Country’s population, including historically nomadic societies that even today continue to rely on pastoralism. Their population is highly dispersed, at a density four times lower than the national average. They present profound infrastructure deficits, including lack of access to roads, electricity, water, and social services. There is also significant insecurity in certain areas, giving rise to substantial numbers of displaced persons and livelihood adaptations that further undermine economic prosperity.

1.1 CONTEXT

This ESIA report has been prepared based on Site visit baseline survey, desktop survey, documentation review, consultation with stakeholders and in accordance Environmental Management and Co-ordination Act (EMCA), 1999 and its amendments; the Environmental Management and Coordination (Amendment) Act, 2015 and World Bank’s Environmental and Social Operational policies. The study has also assessed the requirement of the project with respect to the local and national regulations relevant to the project.

Norken International Limited in Joint Venture with Centric Africa Limited were appointed by Ministry of Energy to undertake consultancy services for the Environmental and Social Impact Assessment (ESIA), Social Assessment (SA) and Vulnerable and Marginalized Groups Plan (VMGP) as per the standard TOR and NEMA and WB Operational policies. The two firms are licensed by National Environment Management Authority (NEMA) to undertake environmental impact assessment studies. As reported, land acquisition has not resulted in any economic or physical displacement and no resettlement is envisaged for the proposed project.

Due to the remoteness and sometimes dispersed nature of the target populations and considering the lifestyles and socio-economic status of those residing in underserved Counties, the Project is designed to address low affordability of the potential users, and sustainability of service provision. Therefore, sustainability of the proposed approach to energy access expansion beyond the Nationally owned power network is predicated on two primary factors - public funding, local community participation; and institutional capacity of Kenya Power and Rural Electrification and Renewable Energy Corporation (REREC) and the Ministry of Energy (MOE) as the implementing agencies.

The project components are:

- Component 1- US\$40M: Mini-grids for Community Facilities, Enterprises, and Households -This component will support electrification of areas where electricity supply through mini-grids represents the least cost option from a country perspective.
- Component 2- US\$48M: Stand-alone Solar Systems and Clean Cooking Solutions for Households; This component will support electrification of households using standalone solar systems in areas where load clusters do not exist and the best technical and financial solution is standalone solar systems.
- Component 3- US\$40M: Stand-alone Solar Systems and Solar Water Pumps for Community Facilities; This component will support electrification of public institutions and community facilities using standalone systems. This component will also support the installation of solar PV-powered water pumps for consumptive purposes.
- Component 4- US\$22M: Implementation Support and Capacity Building; This component will finance various technical assistance and capacity building activities to ensure the sustainability and measure the impact of the interventions devised and implemented within the other components of K-OSAP.

The MOE provides overall coordination of the project as well as lead in the implementation of components 2 and 4. Components 1 and 3 (a&b) will be implemented by the Kenya Power and Lighting Company (KPLC) and the Rural Electrification and Renewable Energy Corporation (REREC), respectively. KP will be responsible for implementation of a total of 99 mini-grid sites including the Nachukui mini-grid which is the subject of this report while REREC will be responsible for a total of 57 mini-grids.

1.2 PROJECT OVERVIEW

The identified power Mini-grid site is located on Unregistered Community Land- Land set aside for public use in Nachukui village, Nachukui Sub-location, Turkana North County on GPS Coordinates of latitude 4° 3'43.16"N and longitude 35°52'50.27"E.

The proposed solar mini grid will be located on a 1.252 Hectares piece of land. The solar mini grid will comprise Solar panels, batteries, invertors, perimeter fence and a distribution line.



Figure 1: Map showing the exact location of the site

1.3 PURPOSE AND SCOPE OF WORK

This report discusses the environmental and social baseline within which the proposed solar power project is commissioned and assesses the potential adverse and beneficial impacts that the project could have, along with suitable mitigation measures and an Environmental and Social Management Plan (ESMP) for the project. The report also evaluates the potential environmental and social risks associated with the project and recommends mitigation measures to avoid adverse impacts for the remainder of the project's lifecycle. The project has to comply with international standards (World Bank Environmental and Social Operational Policies) along with applicable national, and local regulations.

1.4 ESIA METHODOLOGY

1.4.1 Screening and Scoping

Evaluation of ESIA procedure was undertaken as a fundamental procedure to implementation of the solar power minigrid development project which is systematically mainstreamed into the project's Cycle. World Banks Social OPs underpin and demonstrate this commitment. The main aim of this is to enhance positive social opportunities and benefits as well as ensure that adverse social and environmental risks and impacts are avoided, minimized, and mitigated.

1.4.2 Environmental Impact Assessment

The steps below were followed in the preparation of this ESIA Report.

1.4.2.1.1 Kick-off Meeting

Norken and Centric team had a brief kick-off meeting with the Proponent on 12th July 2021 followed by subsequent online meetings and discussion on various aspects of the project up to 5th August, 2021 and 15th September, 2021. The meetings addressed varied deliverables and thresholds to be achieved and maintained during this assessment in terms of scope of work, deliverables, timeline and the methodology. All communication and meetings were done online.

Courtesy call meeting to the county commissioner of Turkana was also done as the team dispersed for field assessment.

1.4.2.1.2 Desk based review and baseline assessment

A comprehensive description of the KOSAP Component 1: project includes a desktop review of all the existing project documentation provided by the Proponent including: The Project Appraisal Document and the four main safeguard framework documents prepared under KOSAP- these are Social Assessment, Vulnerable and Marginalized Group Framework, Resettlement Policy Framework and the Environmental and Social Management Framework.

1.4.2.1.3 Project Description

The consultant has concisely described the project location including its geographical, ecological and the general layout of associated infrastructure including maps at an appropriate scale where necessary. Location of all project related development sites, including proximal offsite investments; general layout; flow diagrams/drawings of facilities/operation design basis, size, capacity, flow-through of unit operations, including pollution control technology included if any; pre-construction activities and construction activities; construction schedule; staffing size and support; facilities and services around; commissioning, operation and maintenance activities and plan.

1.4.2.1.4 Baseline Condition

This entails description and collection of relevant primary data within the project site's bio-physical, socio-economic and cultural profile with respect to the biodiversity profile, land use types, cultural heritage and practices, social and economic issues likely to be affected, expected project activities to be involved during the design, construction and operation of the proposed facility. The information also includes description of the community social structure, employment and labour market, sources and distribution of income, cultural/religious sites and properties, vulnerable groups and indigenous populations. This also covers description of the sites' physical environment including their topography, land cover, geology, climate and meteorology, air quality and hydrology. This entailed use of secondary data sources and for some specific environmental parameters the deployment of specialized equipment to measure and record the environmental readings as primary data for analysis and inclusion in the ESIA report. The ecological and biophysical environment will have focused on describing the flora and fauna resident in the Turkana county and at the mini-grid site level. This was based on observation of flora and fauna, KPIs on local indigenous knowledge on historical and current status of rare, endemic and endangered plant and animal species known to occur in the project area. Vegetation assessment was done to gain an understanding of the mini-grid sites habitat type. This has provided for an in depth description of existing land use type and their linked socio-economic activities.

1.4.2.1.5 Impact Assessment (IA) Prediction

The anticipated impacts generated by the project and subsequent evaluation of their significance is provided by this report. A suite of field data collection methods was deployed including public forums discussions, Focus Group Discussions, Key Informant Interviews incorporating questionnaires for social risks assessment. Based on the outcome of the evaluation, the need for emphasis on critical areas was discussed. In order to accomplish this task an initial listing of the range of all issues and concerns identified during the study has been undertaken subsequently followed by analysis of the identified potential environmental and social impacts in terms of type (direct, indirect, cumulative, positive, negative), magnitude (local, widespread, random, severity) and duration (temporary, permanent, long term, short

term). Consequently, an evaluation system was used to categorize these impacts and evaluate them. This aided in determining the significance of the identified potential impacts in relation to established criteria or standards, geographic extent of effects, cumulative nature of the impact, community tolerance and preferences, etc. This culminated into generation of a short list of the most critical issues in terms of environmental, ecological and social impacts both positive and negative associated which the different phases of the project activities that are likely to affect the baseline environmental and social conditions presently occurring at the mini-grid sites.

Socio-cultural risks linked to Component 1 of KOSAP were identified during the assessment. These include, Labour influx, Gender Based Violence, Sexual Exploitation and Abuse, workplace Sexual Harassment, Spread of HIV/AIDS, STDs & other communicable diseases, Gender biases and inequality exclusion of vulnerable and marginalized groups (VMGs) and vulnerable individuals and households from accessing project decision making and governance structures, engagement processes, opportunities and benefits. The vulnerable individuals and households identified included: the poor, elderly persons, PWDs, the sick, poor women, poor female headed households, child-headed households. The VMG's include ethnic minority communities that are present in Nachukui area.

The impacts and risks were identified in relation to free, prior and informed comprehensive stakeholder consultations on land acquisition for construction of mini-grid, contractor's facilities e.g., yard and workers camp site, way leave acquisition for the power line distribution network; restricted access to grazing lands, water resources, soils and tree resources, economic/livelihoods displacement etc.

1.4.3 Environmental, Social Management and Monitoring Plan (ESMMP)

The ESMP as the implementation instrument of the ESIA has captured all the parameters that need to be monitored on a routine basis. The parameters are indicated in an Environmental and Social Management and Monitoring Plan (ESMMP) matrix, a detailed description of the implementation and monitoring program.

The ESMMP has a detailed arrangement of responsibilities for managing and monitoring the implementation of mitigation measures and the impacts of the project during construction, operation and decommissioning. This include: a description of monitoring methodology, specific operations, and features to be monitored, monitoring reporting relationships and arrangements to ensure that monitoring is effective. Simple and straightforward monitoring processes established for ease of implementation throughout the project cycle. This Plan follows through a description of the impacts and areas affected, key mitigation measures, monitor-able indicators, timeframe, responsibilities, and budget implications.

The ESMP include an implementation schedule and budget cost estimates for the mitigation measures. It also describes institutional arrangements with regard to the implementation of the ESMP among the implementing agencies, and the mini-grid contractor(s). This has specific responsibilities, procedures and resources required by each institutional actor engaged in implementing the ESMP.

The "Chance Find Procedures" has also been included in the ESMP as part of prevention and mitigation measures that will be implemented in the event physical cultural resources are encountered during project implementation.

Additionally, the ESMP has a component on contracting management that will ensure the

implementation of the ESMP by all contractors and subcontractors. A contracting mechanism is included in the ESMP to incentivize contractors and their subcontractors to comply with the ESMP or alternatively penalize them for failure to comply with the ESMP. It also includes contractor clauses that will cover worksite health and safety, the environmental and social management of construction sites; labour camps/out of area workers, HIV/AIDS and other Sexually Transmitted Diseases (STDs), stakeholder engagement plans, grievance redress mechanism, child protection, gender equity and sexual harassment, labour rights and the employment of community members. The ESMP also have a budget to guide the contractor on resources required for the implementation and monitoring of the ESMP.

Figure 2 is a summary of the methodology the consultant adopted in undertaking environmental and social impacts assessment for the proposed Nachukui ESIA project.

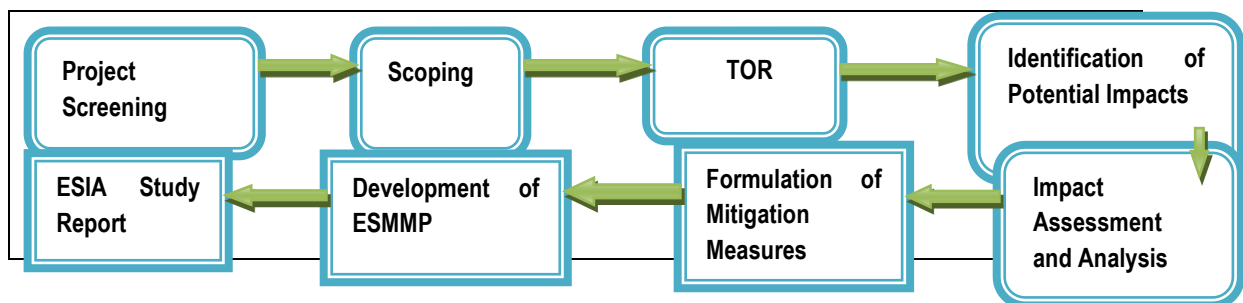


Figure 2: Summary of Environmental and Social Impact Assessment Methodology

1.4.4 Target Group for the ESIA Report

The ESIA Report has been prepared for use by different stakeholders to be involved in the construction and operation of the proposed Mini-Grids project. This report contains useful information on policies and procedures to be adhered to, implementation modalities, analysis of potential environmental and social impacts and suggested mitigation measures at various stages of project activities. The information will be useful in planning, implementation, management and maintenance of the project.

In this regard, the report is useful to the following stakeholders:

- Engineers to be involved in preparation of designs and plans for the proposed solar Mini-grid.
- Contractors to be engaged in the construction works for the project
- MOE and other relevant government ministries and implementing agencies such as; KPLC, etc.
- County Government of Turkana
- Funding agencies
- Project affected persons and other stakeholders

1.4.5 Study Team

This ESIA process was conducted by 2 teams of experts that comprised the following professionals

Team 1 – 24/06/2021-first round of detailed consultations with the community was done during the screening process and it involved disseminating the project information to the community, site identification and screening for the mini-grid and constitution of the GRM and selection of GRM committee.

1. Kioko Maithya - Social Safeguards Officer - REREC

2.	Irene Kawira	- Senior Environmentalist	- REREC
3.	Caleb Ewoi	- CREO	- MOE
4.	Agnes Gachoki	- Senior Surveyor	- REREC
5.	Lawrence Lorika	- Technician	- KPLC (Iodwar)
6.	Myra Mukulu	- Technical Advisor Cook Stoves	- MOE

Detailed minutes given in **Annex 5**

Team 2 -30/09/2021- progressed the ESIA study.

NAME	Position	ORGANISATION
Kennedy Shisoka	Engineer	Ministry of Energy
Caleb Ewoi	CREO	KOSAP
Allan Owino	Environmental and Social Specialist	Centric Africa Limited
Lydia Komen	Environmental and Social Specialist	NorKen International Limited
Japheth Kipsang Bor		NorKen International Limited
Umulkheir Abdi	Environmental Specialist	Centric Africa
Martin Gitonga	Environmental Specialist	Limited NorKen International

1.5 LIMITATIONS/UNCERTAINTIES

The limitation experienced during the study are illustrated below.

- ✓ Risk of being infected or transmitting COVID-19. The teams had to adopt preventive measures by wearing face mask and providing the community members with face mask and sanitizers during the public meetings and interactions.
- ✓ The changes that may occur in baseline conditions, due to external factors over the lifetime of the project;
- ✓ Uncertainty related to Proponent's policy initiatives that might influence the assessment of future baseline and post-development conditions;
- ✓ Uncertainty in design information which should be dealt with by the definition of design parameters for the development by the Contractor and Proponent;
- ✓ Uncertainty in relation to project planning and implementation as the detailed program and means of construction may be influenced by the choice of Contractor and the detailed design of the development; and Uncertainty in the understanding of who the VMGs are, and their population

1.6 LAYOUT OF THE REPORT

Table 5: Structure of the ESIA Report

SECTION	TITLE	DESCRIPTION
---------	-------	-------------

Section 1	Introduction	Introduction to the Project and ESIA scope and methodology adopted.
Section 2	Project Description	Technical description of the Project & related infrastructure and activities.
Section 3	Applicable Legal and Regulatory Framework	Discusses the applicable environmental and social regulatory framework and its relevance for the Project.
Section 4	Environmental, Ecology and Social Baseline	Outlines Environmental, Ecology and Social Baseline status in the study area of the Project
Section 5	Stakeholder Engagement and Grievance Redress	Provides an overview of the stakeholder engagement activities undertaken during the ESIA, stakeholder categorization and profiling. Additionally, it details the provision of Grievance Redress Mechanism for the project
Section 6	Impact Assessment and Mitigation Measures	This section includes details of identified environmental impacts and associated risks due to Project activities, assessment of significance of impacts and presents mitigation measures for minimizing and /or offsetting adverse impacts identified.
Section 7	Environmental and Social Management Plan	Outline of the ESMP taking into account identified impacts and planned mitigation measures and monitoring requirements.
Section 8	Impact Summary and Conclusion	Summary of impacts identified for the Project and conclusion of the study.

2 PROJECT DESCRIPTION

2.1 INTRODUCTION

This section provides a description of the Project in terms of location, facilities and associated Project infrastructure and activities during the Project lifecycle. It also presents the potential impacts on resources and receptors that could result from Project activities during the pre-construction, construction, operation and decommissioning stages.

Table 6 below provides a summary of the pertinent information of the proposed Nachukui solar mini grid;

Table 6: Summary Information of the proposed Nachukui Solar Mini-grid

S. NO.	PARTICULARS	DESCRIPTION
1.	Project location	The power Mini-grid site is located Nachukui village, Nachukui sub-location Ngissinger Location, Turkana County on GPS Coordinates of latitude 4° 3'43.16"N and longitude 35°52'50.27"E.
2	Land Size/Tenure	The proposed solar mini grid will be located on an approximate 1.252 Ha piece of land. The site is on unregistered community Land- Land set aside for public use.
	Approx. population	5563
	Households	335
	Dominant ethnic group	Turkana
	Other minor ethnic groups	Merrile from Ethiopia, kalenjin, Luhya
3.	Minigrd Capacity	PV Array (DC-kW) of 80kw; 170kWh Battery
4.	Minigrd Power	LV Circuit of 9.65 km
6.	Target Consumers	382 (370 Residential and 12 Non Residential)
7.	Climatic condition	Turkana North has both arid and semi-arid lands (ASAL). Mean temperature ranges from a low of 24 °C to a high of 38 °C with a mean of 30 ° C. The lowest rainfall recorded in the central plains around Lodwar. This area receives an annual average rainfall of 120 mm. The heaviest rainfall is experienced in the northwest area around Lokichogio, which has an average rainfall of about 430 mm. Lokitaung, Nachukui and Kaputir in the Turkwel valley to the south, have an average of 300 mm and 280 mm respectively. The rainfall pattern and its distribution has been unreliable and erratic over the years as is evidenced from the annual figures derived from Lodwar meteorological station which range from 19 mm to 380 mm. Rain is usually accompanied by sharp thunderstorms in the late afternoons and at night. The long rains usually fall between April to June, and short rains in October - December.
9.	Site Conditions	The site climate is dry and the area is characterised by sandy loam soil. The density of vegetation is scarce and Mathenge plant, shrubs and acacia plants were noted at the site.
10.	Road Accessibility	Murram road- Lomekwi-Nachukui Road
11.	Nearest Airport	None
12.	River/canal/nallah/ pond present in project footprint	None

S. NO.	PARTICULARS	DESCRIPTION
13.	Protected areas (National Park/ Sanctuary)/ Forest land within 10 kms	None

2.2 PROJECT LOCATION

The power Mini-grid site is located Nachukui village, Nachukui sub-location Ngissinger Location, Turkana County. Geographically, the site is located on latitude 4° 3'43.16"N and longitude 35°52'50.27"E.

The proposed project site is located 0.19km from Capilla Nachukui, 0.49km from St. John the Evangelist Catholic, 1.24km from Lake Turkana and 0.24km Nachukui Primary School. The proposed project site is generally flat and the area is characterised by highly sandy loam soils.

Figure 3 and Plate 1 below present the location of the proposed project site.



Figure 3: Project Location



Plate 1: Project site picture

2.2.1 Project site setting

The proposed Nachukui mini grid is in Turkana County. It falls under Lot 1 comprised of West Pokot and Turkana Counties. Geographically, Nachukui site falls on coordinates of latitude 4° 3'43.16"N and longitude 35°52'50.27"E.

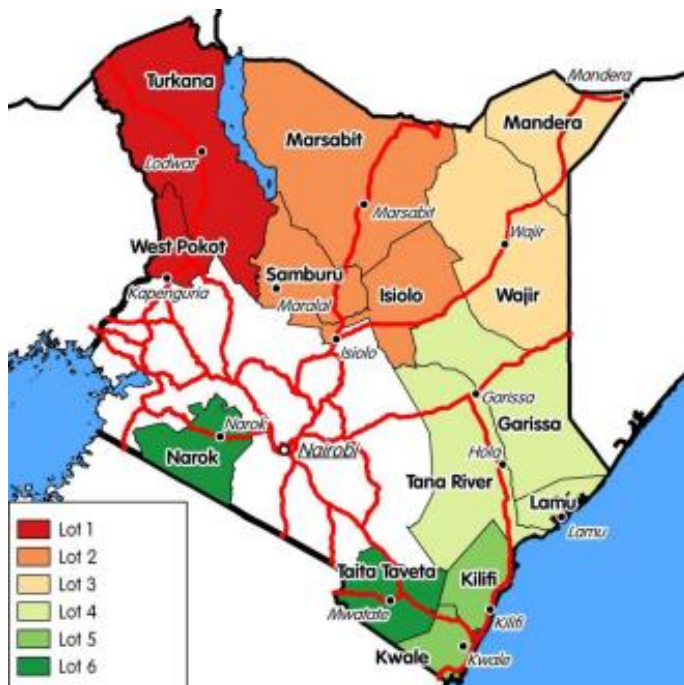


Figure 4: Map Showing the KOSAP Counties Lot 1

2.3 DESCRIPTION OF PROJECT FACILITIES, COMPONENTS AND ACTIVITIES

2.3.1 Project Components

2.3.1.1 Solar PV modules

The project will use PV Array (DC-kW) 90 polycrystalline silicon module with three strings connected in series. Each string will have five sets of panels connected in series, with output converged at the six-way combiners. The life expectancy of the PV modules is estimated at 25-30 years.

Solar Photovoltaic Panels: At the heart of the project, a minimum solar capacity of 120 kWp will be harnessed to capture solar energy. Solar power is a clean and renewable source, and it serves as the primary electricity generation method.

Battery Energy Storage System: To store excess solar energy and ensure a continuous and stable power supply, a minimum usable battery capacity of 300 kWh is integrated into the system.

Diesel Generator: A Diesel Generator with a prime rating of 82 kVA is part of the project to provide backup power during periods of low solar generation or high demand.

Fuel Tank for Diesel Generator: A 2,000-liter fuel tank is included to store diesel fuel for the generator, ensuring uninterrupted power supply during extended periods of low solar generation or other contingencies.

Inverters and Chargers:

PV Inverter: With a minimum capacity of 120 kW, PV inverters are used to convert direct current (DC) electricity generated by the solar panels into alternating current (AC) electricity suitable for consumer use.

String Inverters: The project utilizes a maximum string inverter capacity of 50 kW to optimize the efficiency of the electricity conversion process.

Battery Inverter Charger: With a minimum capacity of 82 kW, the battery inverter charger manages the flow of energy to and from the battery storage system efficiently, ensuring the overall performance of the system.

2.3.1.2 Power Distribution Network:

Low Voltage (LV) Network: A 13-kilometer low voltage power distribution network will be established to efficiently transmit electricity to consumers. This network ensures a stable and reliable power supply while minimizing energy losses.

Medium Voltage (MV) Network: The project features a 1.88-kilometer medium voltage network, which connects the generation sources to the low voltage network, ensuring robust power transmission.

Step-Up Transformer: A 100 kVA step-up transformer is included in the project to adjust voltage levels as needed, facilitating power transmission.

Step-Down Transformers: Two 50 kVA step-down transformers are deployed for further voltage adjustment, ensuring optimal power distribution and accessibility.

Power Demand Metrics:

Monthly Energy Demand: The project is designed to meet a monthly energy demand of 12,200 kWh, effectively addressing the specific energy needs of both residential and non-residential consumers.

Daily Energy Demand: A daily energy demand of 407 kWh is proposed, ensuring a consistent and stable power supply for various applications.

Peak Demand: The system is tailored to accommodate a peak demand of 76 kW, effectively addressing high-demand periods and ensuring uninterrupted access to electricity.

2.3.1.3 Battery Energy Storage System

The Battery Energy Storage System (BESS) will comprise of Lithium-ion Battery pack that conforms to IEC standards with warranty of 10 years, 3,000 cycles minimum. The Lithium-ion Battery Power Packs will be used to cater for required energy capacity, or equivalent as per approved design, minimum 80% DOD for Lithium-Ion. Batteries will be capable of at least C/4 charge and discharge rate. Batteries will be charged by Battery Inverter / Charger.

2.3.1.4 Inverters

The Inverters shall be designed for continuous, reliable power supply as per specification and shall have internal protection arrangement against any sustained fault in the feeder line and against lightning strikes in the feeder line. The inverters shall be capable of complete automatic operation including wake-up, synchronization & shut down independently & automatically.

2.3.1.5 Distribution lines

Nachukui site will have a distribution line circuit of 9.65 km in total. Supply of concrete poles for the distribution lines will be based on detailed survey and accessories like phase plates, circuit plates, number plates, danger plates, anti-climbing devices as per KPLC requirements/specifications. Erection of the Poles, fixing of insulator strings, stringing of conductor and earth wires along with all necessary line accessories and earthing will be as per KPLC requirements/specifications.

2.3.1.6 Project Activities

The main project activities include site clearance and leveling, civil works and construction of utilities and structures for the facilities, installation and connection of the power plant.

2.3.1.7 Construction Procedures

The project will be constructed based on applicable standards of Kenya, environmental guidelines and health and safety measures in line with OSHA Act 2007.

The project inputs will include the following;

- Construction of raw materials will include solar modules, inverter, wires, metals, among others. All these will be obtained from licensed dealers and especially those that have complied with the environmental management guidelines and policies.
- Construction machines will include machinery such as trucks, and other relevant construction equipment. These will be used for the transportation of materials, clearing of resulting construction debris.

- A construction labour force of both skilled and non-skilled workers will be required.

Construction activities will include the following:

- Contractor mobilization;
- Site Preparation;
- Procurement of construction material from approved dealers and transport to the site.
- Storage of PV modules delivery and their installation;
- Laying of internal electrical connections;
- Installation of inverters, Battery Energy storage system and transformers;

2.3.1.8 Construction Contractor

The construction contractor is responsible for building the physical infrastructure required for the mini-grid project. In this case, the infrastructure includes the installation of solar panels, battery storage systems, a diesel generator, inverters, and the low voltage power distribution network.

Their specific responsibilities will include site preparation, installation of solar panels, setting up the battery storage system, configuring the diesel generator, and laying down the distribution network.

The construction contractor will be responsible for ensuring that the components are installed correctly and meet the required standards for safety and performance. They may also manage the workforce, logistics, and project timeline to ensure that construction proceeds smoothly and is completed within the specified timeframe.

2.3.1.9 Operation and Maintenance (O&M) Contractor

The O&M contractor will be responsible for the ongoing operation and maintenance of the mini-grid system once it is operational. The construction contractor will also double up as the O&M contractor

In this project, their responsibilities include monitoring the performance of the solar panels, battery storage system, and the diesel generator to ensure the continuous and reliable supply of electricity to the consumers. The O&M contractor must carry out regular maintenance tasks, such as cleaning and servicing solar panels, inspecting and maintaining the battery energy storage system, and ensuring the diesel generator is in good working condition for backup power needs. They are responsible for addressing any technical issues or faults that may arise, as well as responding to consumer complaints and inquiries related to the electricity supply. The O&M contractor plays a crucial role in maximizing the system's efficiency and longevity by ensuring all components operate optimally.

The contractor will be required to have their own Environment, Health, and Safety (EHS) policy and an EHS officer on site. In the context of the mini-grid project, it will outline the contractor's dedication to upholding safety standards, minimizing environmental impact, and adhering to legal requirements. The presence of an EHS officer on site will be equally essential. Their role will be to oversee and manage all EHS concerns directly at the project location.

2.3.1.10 Project Cost

Nachukui project cost is estimated at **USD. 509,008.**

Note: *The Solar Mini-grid will be installed operated and maintained by the contractor for the first seven (7) years and then handed over to KPLC.*

2.3.1.11 Land Tenure

Land in Turkana is communally owned; any purchase/lease/rent of land must pass through the local leaders-chiefs, village elders and the community-who must be informed as well authorize the land acquisition process.

The proposed site is on Unregistered Community Land- Land set aside for public use in the area. Article 63 of the Constitution of Kenya (2010) states that "*any unregistered community land shall be held in trust by County governments on behalf of the communities for which it is held*". The project site identified was barren, there wasn't any archaeological, paleontological, historical, architectural, religious, aesthetic, or other cultural significance as well as is not located within the vicinity of recognized cultural heritage sites and the land was communal.

2.3.1.12 Compensation Details

Compensation for the land for the proposed project will be in kind;the Proponent will undertake some projects for the community. In Nachukui, the community requested the following projects:

- **1st Priority-** Improvement of clean water supply in the area by doing water reticulation and piping from Nariokotome.
- **2nd Priority-** Construction of ECD Classes.
- **3rd Priority-** Maternity ward and hospital lab at the dispensary

2.4 RESOURCE REQUIREMENT

2.4.1 Workforce Requirement

Approximately 40 skilled, semi-skilled and unskilled laborers will be required at the construction stage. During the operation phase, about 15 no. staff will be required of which 8 will be skilled staff comprising: One operations and maintenance head, 2 engineers, 5 technicians and 2 security guards. Unskilled staff will be approximately 5 and will be hired for grass cutting and module cleaning.

2.4.2 Water Requirement and Source

2.4.2.1 Construction Phase

It has been estimated that approximately 50,000 Litres of water will be required per day for civil works during construction stage. Further, water will be required for workers at project site. However, this quantity of water requirement will vary depending on the mobilisation of construction workers at site. The water for the construction phase will be supplied by local water vendors.

2.4.2.2 Operation Phase

The water required during operation phase of the project will be mainly for washing the face of the solar modules, minimal water will be used for this purpose. The quantity of Water requirement during operational phase of the project is not known at this stage of the project. The water for the construction phase will be purchased from the vendors in the area.

As noted previously, approximately, employees (direct and contractual) will be working during operation phase. For this workforce, approximately 10,000 Litres of water will be required for domestic consumption.

2.4.3 Raw Material Requirement

2.4.3.1 Construction Phase

The major raw materials required for the construction phase will be solar modules, fencing materials, construction materials like cement, sand and aggregate. The fencing materials and the construction materials will be sourced from the local hardware facilities. Solar Modules for

the project along with associated structures will be obtained from suppliers in in the Country or if not available imported from suppliers outside the country.

2.4.3.2 Operation Phase

There will be no major requirement of raw materials during operation phase. Only maintenance spares will be required at this phase.

2.4.4 Power Requirement

Power requirement during the construction phase will be met through Diesel Generators sets. The exact number of Diesel Generator sets to be used, as well as the quantity of fuel, will be ascertained once the project design is finalized.

2.4.5 Fire Safety and Security

2.4.5.1 Construction Phase

Appropriate firefighting system and equipment shall be provided throughout the construction period. The fire extinguishers will be well distributed according to the fire risks and will be available in areas such as the site office, security area, storage yard etc. A comprehensive emergency response plan with all the emergency numbers will be well displayed at the project site.

2.4.5.2 Operation Phase

Suitable fire protection and fighting systems that will include portable fire extinguishers, automatic fire detection system and means of fire communication will be made available at the entire PV array area, inverter stations, main control room and switchyard.

The systems and equipment's will align to the Kenyan Fire Reduction Rules of 2007. The Fire protection and fighting systems will be maintained and serviced after every 6 months. The team managing the site will be trained on Fire safety as per the requirement on Fire Risk reduction rules. Further the proponent will be required to undertake Annual OSH Audits, Fire audits and Risk assessment as per the requirement of OSHA 2007 and the relevant subsidiary legislation.

3 ANALYSIS OF ALTERNATIVES AND PROJECT JUSTIFICATION

This section analyses the project alternatives in terms of site and technology. Solar projects are non-polluting energy generation projects which are site specific and dependent on the availability of solar irradiance resource. The current site selected is a high solar power potential site with high irradiation and consistent sunny days throughout the year.

3.1.1 Site Selection

Solar projects are non-polluting energy generation projects which are site-specific and dependent on the availability of solar irradiance resource.

The proponent identified one location for the proposed solar project in Nachukui. The site was identified based on the location of settlement areas, commercial/ public facilities in Nachukui. The site is at the center of Nachukui and near the important institutions in the area.

Further details on the other locations identified were not available.

- No settlement present in the project site;
- The project site land is predominantly on Unregistered community land that has been set aside for public facility use.
- The project site has scarce vegetation
- The project site land is on flat terrain and characterized by sandy loam soils

The proposed project site has the following location advantages:

- The land is unoccupied and is within land allocated for development of public facilities
- No cultural property of archeological importance within 5 km radius and
- No close area is connected to the national grid.



Figure 5: Profile of the Proposed Mini Grid

3.1.2 Power Scenario in Nachukui

The existing sources of energy at Nachukui according to the Men and Women FGDs include

solar powered appliances supplied by private enterprises such as D-light for lighting and charging phones. The current energy availability provided by the solar appliances is insufficient and does not meet the objective of the aim of project. Wood fuel is utilized for cooking and heating water.

The county has a huge potential for renewable energy which can be tapped through wind and solar energy and hence be channeled to productive sectors within the county as well as export to other counties. Failure to construct and operate the minigrid in Nachukui will lead to the failure of achieving one of the Kenya's national long-term development policies that aims to transform Kenya into a newly industrializing, middle-income country, by providing a high quality of life to all its citizens by 2030 in a clean and secure environment. Beneficiaries will be households, public and community institutions, enterprises and community facilities that cannot access electricity through the national grid and whose use of electricity will replace kerosene and other fuels for lighting and other activities like pumping water.

3.1.3 Alternative Sources of Energy

The possible alternatives to electrical energy could be solar power, wind power, thermal power, fossil fuel and firewood. Power import from neighbouring countries is another option. Wind power is also a source of clean energy.

The problems in operation of wind power are lack of time series data of wind, trained human resources to intricate design of wind power etc. In addition, providing wind power for Nachukui residents is technically and financially challenging.

Thermal power plants are associated with serious environmental problems like air pollution, waste pollution, noise pollution, temperature pollution etc. Besides coal and petroleum products, the basic input required for the conventional thermal power plants will have to be imported. Therefore, thermal power option based on coal and petroleum products is not a viable option for Nachukui.

The use of firewood and solid waste for electricity generation by the use of thermal technology is another option. But the issue of air pollution and forest degradation already are environmental problems of serious concern which will further aggravate the natural environment. For these reasons, the thermal power options evaluated above seem inappropriate for Nachukui on environmental as well as economic grounds.

Solar energy was a desirable option because:

- It has low energy-production costs
- Versatile installation
- It is a clean source of energy hence minimal impact on the environment air quality
- Economic savings.

3.1.4 Zero or No Project Alternative

The No Project option in respect to the proposed project implies that the status quo is maintained. This option is the most suitable alternative from an extreme environmental perspective as it ensures non-interference with the existing conditions. This option will however, involve several losses both to Nachukui centre, institutions and the community as a whole. The area will continue to have no electricity and this will not help maximize usage and utilization of this centre. It will involve several losses to Nachukui location. The village and the surrounding area will continue to have no electricity and this will not help in maximizing and utilizing the area facilities. Main facilities that will lose out includes; Nachukui Primary school, PAG Church, St. John Catholic Church, Nachukui Dispensary etc. The No Project Option is the least preferred from the socio-economic and partly environmental perspective due to the following factors:

- The economic status of residents and the local people would remain unchanged.
- No employment opportunities will be created for Kenyans who will work in the project area.
- Increased rural poverty and crime in area.

- Discouragement for investors and loaners

From the analysis above, it becomes apparent that the No Project alternative is no alternative to the local people and the Government of Kenya.

3.1.5 Alternate Location for Project Site

The identification of potential Mini-grid site for the proposed Nachukui Solar Mini-grid involved site visits to the study area, preliminary site assessments and consultations among the concerned departments of the KPLC and MOE.

The community was requested to propose a piece of land 2-3 acres for the project. The appropriateness of potential Mini-grid sites identified by the KPLC during the initial site visits was assessed in terms of various suitability criteria and technical restrictions stipulated by KPLC, as outlined below:

- Load growth - the location of Mini-grid first and foremost is informed by the existing and also load growth of an area. Technical studies show that the area will experience load growth over time and there is need to supply electricity.
- Size – proposed potential sites need to be sufficient for the average size of Solar Mini-grid and associated auxiliary facilities. Therefore, the size acquired must meet the required size. The proposed site is 1.252 hectares.
- Topography – consideration is given to the topography of potential sites whereby flat or gently sloping topography is preferred. An ideal gradient for the natural ground is 1:100. A gentle slope facilitates surface drainage and movement of vehicles and people on-site during construction. A steep slope requires costly levelling (cut and fill) for the construction of the solar Mini-grid. In addition, a steep slope inhibits movement, makes vehicle access problematic and increases the potential for environmental impacts during construction as well as operation e.g., steeper slopes have higher surface water flow rates and therefore higher erosive potential. The proposed site is flat and cost-effective during construction.
- Hydrology – consideration is given to the proximity of potential sites to adjacent water courses and wetlands where there may be potential impacts in terms of erosion and siltation of water courses, as well as implications associated with storm-water control at the Solar Mini-grid site. The site is not close to water resources or wetland and so no impact to water sources through siltation. Further, construction of drainage is not complicated.
- Geology and soils – consideration is given to the soil type present within the potential site whereby stable soil and founding conditions are preferable. Less stable soils, i.e., shallow, dispersive soils and soils with poor drainage present an erosion hazard if not managed correctly, and also require the instalment of additional, costly foundation infrastructure. The soils at the site are well drained.
- Flora and fauna – potential sites need to be assessed in terms of their ecological value at both a macro and micro scale i.e., within the site and the environment surrounding the site. Both a faunal and floral investigation may be required, with particular emphasis on ensuring the protection of endemic and red data species and their habitat, should they be present. An identified site that has a high ecological value may be excluded from the list of potential sites. The site is not of a high ecological value.
- Visibility – highly visible sites i.e., on a ridge / elevated terrain are considered less favourable in that they have a high visual impact on the surrounding landscape. Sites that are hidden or out of site e.g., behind a hill, may be considered more suitable; the site is on flat part near chief's office and may not create sharp visual impact because it is not on an elevated point.
- Access – it is preferable that potential sites are located in close proximity to existing public roads so as to avoid the need for construction of new access roads of considerable length.

Access is also important particularly as it relates to the transportation of the solar panels, batteries and generator to the site, which are heavy weights and requires the use of a low-bend vehicle. As such, long access routes with sharp bends are to be avoided and the site should not be located in an area that has excessively steep inclines or declines that could hinder access, particularly during periods of heavy rainfall; the site is well accessible as it along the road.

- Adjacent land use – adjacent land use has implications for access and required clearances for the power lines extending from the solar plant site, i.e., it is important that the land surrounding the Mini-grid is relatively clear of obstructions which might otherwise inhibit / obstruct the path of the power lines out of the Mini-grid. Current and future development planning of adjacent land use should therefore also be considered. The site and the developments around do not pose a hindrance for incoming and outgoing feeders.
- Public acceptability – public acceptance criteria relate to such issues as the possible adverse impact on public health, quality of life, and local land and property values. During the public consultations there was overwhelming support for the project with mitigation measures being put in place for the negative impacts.

Based on the above-mentioned suitability criteria and technical requirements, the proponent decides to put up the Solar Mini-grid within Nachukui. Relocation option to a different site is an option available to the proponent. The project proponent can look for alternative land to accommodate the scale and size of the project. However, this will be a costly venture, may take a long time although there is no guarantee that the land would be available in the targeted area. It is recommendable that the proponent be allowed to install the project in the proposed site

3.1.6 Analysis of Alternative Construction Materials and Technology

The proposed project will be constructed using modern, locally and internationally accepted materials to achieve public health, safety, security and environmental aesthetic requirements. The materials will include all consumables, tools, testing instruments or any other equipment required for successful commissioning of the project. These may not be desirable from a cost and durability perspective. The technology to be adopted will be the most economical and one sensitive to the environment. The technology will involve a Battery Energy Storage System (including battery Inverter and charger).

3.1.7 Solid waste Management Alternatives

A lot of solid wastes will be generated from the proposed project site. An integrated solid waste management system is recommendable. First, the proponent will give priority to reduction at source of the materials. This option will demand a solid waste management awareness program in the management and the staff. Recycling and reuse options of the waste will be the second alternative in priority. This will call for a source separation program to be put in place. The third priority in the hierarchy of options is combustion of the waste that is not recyclable. In this regard, a NEMA registered solid waste handler would have to be engaged. This is the most practical and feasible option for solid waste management considering the delineated options.

3.1.8 Conclusion

The proposed project should be approved to support the local community based on community need assessment and alternatives discussed above.

4 APPLICABLE AND REGULATORY FRAMEWORK

4.1 INTRODUCTION

This Chapter outlines the existing national and international environmental and social legislation, policies and institutions applicable to energy generation that guide the development of the Project.

As Kenya is a signatory to various international conventions and laws, national projects need to be aligned with their requirements; relevant international conventions and laws are therefore presented in this chapter.

Finally, a summary of the World Bank (WB) Environmental and Social operational policies. relevant to this Project are presented.

4.2 KENYA ELECTRICITY SUPPLY INDUSTRY (ESI)

The Kenya Electricity Supply Industry (ESI) is one of the sub-sectors in the energy sector which the Ministry of Energy and Petroleum oversees on behalf of the Government of Kenya (GoK). Relevant stakeholders in the ESI are briefly described below.

- **Kenya Power Company:** responsible for distribution and retail supply of electrical energy to end users. Kenya Power purchases power in bulk from the Kenya Electricity Generating Company Limited (KenGen) and the Independent Power Producers (IPPs) through bilateral contracts or Power Purchase Agreements (PPAs) approved by the Energy and Petroleum Regulatory Authority (EPRA).

KPLC will be responsible for implementing the project, construction of the generation systems and distribution network for the Nachukui site. Supply of power will be through KPLC and same tariffs will be charged for each category.

- **The Energy and Petroleum Regulatory Authority (EPRA):** established by the Energy Act of 2019. The EPRA's mandate extends beyond electricity and includes natural gas (including petroleum), renewables and all other forms of energy. The generation, transmission, distribution, supply, import and export of electricity can only be carried out by parties in possession of a license or a permit issued by the EPRA. In the event that the capacity involved is for own use and less than 1 MW, authorization is not required. Although the generated electricity is expected to be less than 1 MW (0.3 – 1 MW), the fact that the generated electricity is intended for use in a factory and there is a possibility for connection to the national grid and sale of excess power to the government, the project requires a license from the EPRC to generate electricity as stipulated in the Energy Act, 2019.

The Energy and Petroleum Regulatory Authority (Authority) together with industry stakeholders have developed the Draft Energy (Mini-Grid) Regulations, 2021 (the 'Regulations'). The Regulations have been developed within provisions 10, 11 and 208 of the Energy Act, 2019 (the 'Act') and shall constitute Regulations to the Act. The Regulations will amongst others, provide guidance to mini-grid developers and other stakeholders on the tariff approval and licensing requirements. This will be directly applicable to the Nachukui site.

- **Ministry of Energy and Petroleum:** aims to facilitate provision of clean, sustainable, affordable, reliable, and secure energy services for national development while protecting the environment.

The ministry will be responsible for not only implementing the community projects like water and cooking stations from the proposed project but also the overall coordination of project implementation and oversight.

- **The Rural Electrification and Renewable Energy Corporation (REREC):** is established under Section 43 of the Energy Act, 2019 as a corporate body. The Corporation is the successor to the Rural Electrification Authority established under section 66 of the Energy Act No. 12 of 2006 (now repealed) and subject to this Act, all rights, duties, obligations, assets and liabilities of the Rural Electrification Authority existing at the commencement of this Act is to be automatically and fully transferred to the Corporation and any reference to the Rural Electrification Authority in any contract or document shall, for all purposes, be deemed to be a reference to the Corporation.
- **The Kenya Electricity Transmission Company (KETRACO):** Was incorporated on 2nd December 2008 and registered under the Companies Act, Cap 486 pursuant to Sessional paper No. 4 of 2004 on Energy. KETRACO's mandate is to design, construct, operate and maintain new high voltage electricity transmission infrastructure that will form the backbone of the National Transmission Grid, in line with Kenya Vision 2030
- **Energy and Petroleum Tribunal (EPT):** The tribunal is established under section 25 of The Energy Act, 2019. The tribunal is established for the purpose of hearing and determining disputes and appeals in accordance with The Energy Act, 2019 or any other written law. In relation to the proposed Project, any disputes or appeals if they arise will need to be addressed by the EPT.

4.3 NATIONAL LEGAL FRAMEWORK REVIEW

The applicable legal framework is illustrated in table 7 below.

Table 7: National Legal Framework

No Legislation/ Guidelines	Description of the Legislation/Guideline	Relevance of the legislation/regulations in terms of license, permits, and other requirements
NATIONAL POLICY FRAMEWORK		
1. Vision 2030	Kenya Vision 2030 is the current national blueprint for development from its inception in 2008 until the milestone year of 2030. This plan is the national long-term development policy that aims to transform Kenya into a newly industrialised, middle-income country by 2030. The Vision is comprised of three key pillars (economic, social, and political), two of which are projected to be positively affected by project implementation.	Under Vision 2030, Energy is identified as one of the key sectors that form the foundation for socio-political and economic growth. Promoting equal opportunities across the entire Kenyan territory and enhancing access to competitively priced, reliable, quality, safe and sustainable energy is essential to the achievement of this vision.
2. The Poverty Reduction Strategy Paper (PRSP) of 2001	The PRSP has the twin objectives of poverty reduction and enhancing economic growth. The paper articulates Kenya 's commitment and approach to fighting poverty; with the basic rationale that the war against poverty cannot be won without the participation of the poor themselves.	<ul style="list-style-type: none"> • The proposed project aims at provision and access of renewable electricity geared towards improved economic performance and thus will contribute to poverty alleviation in the project area.
3. National Environmental Action Plan (NEAP) of 1994	The NEAP for Kenya was prepared in mid 1990s. It was a deliberate policy whose main effort is to integrate environmental considerations into the country 's economic and social development. The integration process was to be achieved through multi-sectoral approach to develop a comprehensive framework to ensure that environmental management and the	<ul style="list-style-type: none"> • NEMA does not approve a development project unless the impacts of the proposed project are evaluated and mitigation measures proposed for incorporation in the project 's development plan, which is in line with the requirements of the NEAP. • The project will be reviewed by NEMA for approval before implementation.

conservation of natural resources forms an integral part of societal decision-making.

- 4. Environmental and Development Policy** (Session Paper No.6 1999) and As a follow-up to the foregoing, the goal of this policy is to harmonize environmental and developmental goals so as to ensure sustainability. The paper provides comprehensive guidelines and strategies for government action regarding environment and development.
- The Government will:
- Ensure Strategic Environment Assessment (SEA), Environmental Impact Assessment, Social Impact Assessment and Public participation in the planning and approval of infrastructural projects.
 - Develop and implement environmentally-friendly national infrastructural development strategy and action plan.
 - Ensure that periodic Environmental Audits are carried out for all infrastructural projects
- The proponent:
- is undertaking an Environmental Impact Assessment, Social Impact Assessment and Public participation as part of the planning and approval of infrastructural projects.
 - Will ensure that periodic Environmental Audits are carried out for the project.
- 5. The National Energy and Petroleum Policy 2015** The overall objective of the energy and petroleum policy is to ensure affordable, competitive, sustainable and reliable supply of energy to meet national and county development needs at least cost, while protecting and conserving the environment. This policy stipulates the transformation of the Rural Electrification Authority (REA) to Rural Electrification and Renewable Energy Corporation (RREC) to be the lead agency for development of renewable energy resources.
- The policy is relevant to the project in the sense that the project will provide sustainable and reliable energy supply and measures will be put in place to protect and conserve the environment during its development. RREC will be in charge of the development of the minigrid and maintenance.
-

-
- 6. The Gender and Development Policy (Sessional paper no.2 2019)** The overall goal of this policy is to achieve gender equality by creating a just society where women, men, boys and girls have equal access to opportunities in the political, economic, cultural and social spheres of life. The anticipated outcome of this policy as enshrined in the Constitution that aligns to the project include:
- a) Equality and economic empowerment will be of both genders,
 - b) Women and men will have equality of opportunity to participate in decision making and to contribute to the political, social, economic and cultural development agenda;
 - c) Sexual and Gender based Violence will abate and men, women, boys and girls will live with dignity
- 7. The HIV/ AIDS Policy 2009** In summary, the policy aims at:
- i. Establishing and promoting programmes to ensure non-discrimination and non- stigmatization of the infected;
 - ii. Contributing to national efforts to minimize the spread and mitigate against the impact of HIV and AIDS;
 - iii. Ensuring adequate allocation of resources to HIV and AIDS interventions;
- In the absence of appropriate measures, the project can exacerbate gender inequalities and sexual and gender based violence. In adherence to this policy, measures will be put in place to:
 - ensure gender inclusivity in decision making, employment opportunity and access to the energy generated from the Mini-Grid
 - mitigate social risks including sexual and gender based violence, and any form of discriminations
 - The proposed project is to be implemented in a rural setting at Nachukui area. The area is not economically empowered hence few HIV/AIDS prevention resources are available. This policy shall provide a framework to both the project proponent and contractor to address issues related to HIV/AIDS during the entire project phase.
-

NATIONAL LAWS AND LEGISLATION

1. The Constitution of Kenya, 2010	The Constitution of Kenya promulgated in 2010 is the supreme law of the republic and binds all persons and all State organs at all levels of government. The Constitution provides the broad framework regulating all existence and development aspects of interest to the people of Kenya, and along which all national and sectoral legislative documents are drawn.	
2. ENVIRONMENTAL MANAGEMENT AND COORDINATION ACT, 1999 (AND THE AMENDMENTS OF 2015)	The EMCA is a framework environmental law in Kenya. This Act (assented to on January 14, 2000) provides a structured approach to environmental management in Kenya. With the EMCA coming into effect, the environmental provisions within the sectoral laws were not superseded; instead, the environmental provisions within those laws were reinforced to better manage Kenya's ailing environment.	<ul style="list-style-type: none"> • The proposed project will be undertaken in accordance with relevant sections of the EMCA, specifically Clauses 58 – 63. These sections of the Act are operationalised by subsidiary legislation promulgated under the Act and specifically Legal Notice (L.N.) 101: Environment (Impact Assessment and Audit) Regulations, 2003.
3. L.N. 101: EIA/EA REGULATIONS, AND AMENDMENTS, 2003 AND 2016	These regulations provide the framework for undertaking EIAs and EAs in Kenya by NEMA licensed Lead Experts and Firms of Experts. An EIA or EA Study in Kenya is to be undertaken by a firm duly licensed by the National Environmental Management Authority (NEMA). The EIA/EA Regulations also provide information to project proponents on the requirements of either an EIA or EA as required by the EMCA.	<ul style="list-style-type: none"> • The proposed project is subject to relevant provisions of these regulations and subsequently, the ESIA has been undertaken in accordance with the requirements.
4. L.N. 120: WATER QUALITY REGULATIONS, 2006	These regulation provides for the sustainable management of water used for various purposes in Kenya. For effluent discharges into the environment and aquatic environment, a Proponent needs to apply directly to the NEMA. For discharges into public sewers,	<ul style="list-style-type: none"> • These regulations will apply to the proposed project during the construction and operational phases. The contractor will be required to properly manage the effluent from construction activities in accordance with the above regulations prior to discharge into the environment.

a Proponent needs to apply for the license to the relevant county. The regulation contains discharge limits for various environmental parameters into public sewers and the environment.

- 5. L.N. 121: WASTE MANAGEMENT REGULATIONS, 2006**
- These regulations are comprehensive and cover the management of various kinds of waste in Kenya. Generally, it is a requirement under the regulations that a waste generator segregates waste (hazardous and non-hazardous) by type and then disposes of them in an environmentally acceptable manner. Under the regulation, it is a requirement that waste is transported using a vehicle that has an approved "Waste Transportation License" issued by NEMA. Wastes generated in Kenya must be disposed of in a licensed disposal facility. Such a facility will require annual environmental audits to be undertaken by NEMA registered Lead Experts.
- The regulation requires that prior to generating any hazardous waste, a proponent shall undertake an EIA Study and seek approval from the NEMA. Labelling of hazardous wastes is mandatory under the regulation and the specific labelling requirements are provided in Rule 18. The treatment options for hazardous waste disposal provided in Rule 19 include incineration or any other option approved by the NEMA.
- During the construction and operation phases, the proposed project will generate various streams of wastes. For the most part, it is expected that the wastes will be non-hazardous in nature and can be disposed of in accordance with these regulations.

<p>6. L.N. 61: NOISE AND EXCESSIVE VIBRATION CONTROL REGULATIONS, 2009</p>	<p>The general prohibition of these regulations states that no person shall make or cause to be made any loud, unreasonable, unnecessary, or unusual noise which annoys, disturbs, injures, or endangers the comfort, repose, health, or safety of others and the environment. The regulations further provide factors that will be considered in determining whether or not noise and vibration is loud, unreasonable, unnecessary, or unusual.</p>	<ul style="list-style-type: none"> • Rules 13 and 14 of the regulations define the permissible noise levels for construction sites. These noise limits will be applicable to the proposed project.
<p>7. LICENSES AND PERMITS REQUIRED UNDER THE EMCA</p>	<p>The subsidiary legislations under the EMCA are partially monitored through the use of permits and licenses. Subsequently all licenses and permits required during the construction phase shall be the responsibility of the individual contractors and their agents. During the operational phase, all permits and licenses required to operate the project will be the responsibility of the proponent.</p>	<p>The subsidiary legislations under the EMCA requires some or all the following types of permits to be available for inspection during the construction and operational phases of the project:</p> <ul style="list-style-type: none"> ✓ Effluent Discharge License under Legal Notice 120: The Environment Management and Coordination (Water Quality) Regulations 2006; ✓ Waste Transport License under Legal Notice 121: The Environment Management and Coordination (Waste Management) Regulations 2006 for disposal of all types of wastes; and ✓ Noise Permit under Legal Notice 61: The Environment Management and Coordination (Noise and Excessive Vibration Control) Regulations, 2009.
<p>8. OCCUPATIONAL HEALTH AND SAFETY ACT, 2007</p>	<p>The Occupational Safety and Health Act (OSHA) was enacted to provide for the health, safety and welfare of persons employed in workplaces, and for matters incidental thereto and connected therewith. Part II of the Act provides the General Duties to which the occupier must comply with respect to health and safety in the workplace. Such duties include undertaking safety and health (S&H) risk assessments, S&H audits,</p>	<p>The proposed project will be undertaken in compliance with the OSHA-2007 during the construction, design, and operational phases. During the construction phase, the contractors will be required to fully comply with the requirements of Legal Notice 40 titled: Building Operations and Works of Engineering Construction Rules, 1984 (BOWEC). Each contractor will develop and implement a formal construction health and safety plan for the entire construction phase</p>

notification of accidents, injuries and dangerous duration in alignment with the OSHA and international health and occurrences. A number of sections under this part shall safety best practices. be applicable to the proposed project.

Part IV deals with the enforcement provisions that Directorate of Occupational Safety and Health Services (DOSHS) has under the Act. It discusses the instances when Improvement and Prohibition Notices can be issued as well as the powers of Occupational S&H officers. This part of the Act will be mandatory for the occupier to comply with for the proposed project.

Part V of the Act requires all workplaces to be registered with the DOSHS. This part will be applicable for the proposed project as the Occupier will have to apply for registration of their project with the DOSHS on completion of the construction phase and before the operational phase of the project.

Part VI of the Act lists the requirements for occupational health provisions which include cleanliness, ventilation, overcrowding, etc. This section of the Act will apply to the Occupier during the operational phase of the project.

Part VIII of the Act contains provisions for general safety of a workplace, especially fire safety. This part of the Act will apply to the proposed project during the design, construction, and operational phases.

Part X of the Act deals with the General Welfare conditions that must be present during the construction and operational phase of the project. Such conditions include first aid facilities, supply of drinking water, accommodation for clothing, ergonomics, etc. This part

of the Act will apply to the proposed project during the construction and operational phases.

Part XI of the Act contains Special Provisions on the management of health, safety, and welfare. These include work permit systems, PPE requirements and medical surveillance. Some sections of this part of the Act will be applicable to the proposed project during the construction and operational phase.

Part XIII of the Act stipulates various fines and penalties associated with non-compliance with the Act. It includes those fines and penalties that are not included in other sections of the Act and will be important for the Occupier to read and understand the penalties for non-compliance with S&H provisions.

Part XIV of the Act is the last section of the Act and contains miscellaneous provisions which are not covered elsewhere in the Act. Some sections under this part of the Act will apply to the proposed project and it is in the interest of the occupier to read, understand, and ensure compliance.

-
9. L.N. 31: The Safety and Health Committee Rules, 2004
- These rules came into effect on April 28, 2004, and require that an Occupier formalise a S&H Committee if there is a minimum of 20 persons employed in the workplace. The size of the S&H Committee will depend on the number of workers employed at the place of work.
- For the Proponent and Contractor, the OSHA and the S&H Committee Rules 2004 are important as they require compliance with the following measures:
- The contractor will be required to constitute Health and Safety Committee to oversee safety and health at the construction site. The number of the committee members will be deducted by the number of staff hired by the contractor. The S&H Committee must meet at least quarterly, take minutes, circulate key action items on bulletin boards, and may be required to send a copy of the minutes to the DOSHS provincial office.

-
- Posting of an Abstract of the Factories and Other Places of Work Act in key sections of each area of the factory or other workplace;
 - Provision of first aid boxes in accordance with Legal Notice No. 160 of 1977;
 - Ensuring that there are an appropriate number of certified first aiders trained by an approved institution and that the certification of these first aiders is current;
 - Provision of a General Register for recording, amongst other things, all incidents, accidents, and occupational injuries;
 - Appointment of a S&H Committee made up of an equal number of members from management and workers based on the total number of employees in the workplace;
 - Training of the S&H Committee in accordance with these rules; and
 - Appointment of a S&H management representative for the Proponent.

10. L.N. 24: Medical Examination Rules, 2005 These rules provide for Occupiers to mandatorily undertake pre-employment, periodic, and termination medical evaluations of workers whose occupations are stipulated in the Eighth Schedule to the OSHA and the First Schedule to this Rules. Workers that fall under the above two schedules are required to undergo medical evaluations by a registered medical health practitioner duly registered by the DOSHS.

Some construction activities such as metal cutting and grinding, repair or maintenance of construction equipment could expose the construction workers during construction phase and operations and maintenance workers during operation phase to physical and chemical hazards. The contractor should ensure that the workers exposed to such hazards undergo requisite medical examinations as required by these rules.

<p>11. L.N. 25: Noise Prevention and Control Rules, 2005</p>	<p>The rules set the permissible level for occupational noise in any workplace (which includes construction sites) as follows:</p> <ul style="list-style-type: none"> • 90 dB(A) over an 8-hour time weighted average (TWA) period over 24-hours; and • 140 dB(A) peak sound level at any given time. <p>Additionally, the rules set permissible limits for community noise levels emanating from a workplace as follows:</p> <ul style="list-style-type: none"> • 50 dB(A) during the day; and • 45 dB(A) at night. <p>The Proponent is to ensure that</p>	<p>It is expected that during the construction phase of the project, there may be plant equipment that exceeds the threshold levels of noise stipulated under the Rules. It will therefore be incumbent on the contractor and his or her sub-contractors to ensure that their equipment is serviced properly and/or use equipment that complies with the threshold noise values given above. Alternatively, each contractor will be required to develop and implement a written hearing conservation programme during the construction phase.</p>
<p>12. L.N. 59: Fire Risk Reduction Rules, 2007</p>	<p>A number of sections of the rules apply to the proposed project as enumerated below.</p> <ul style="list-style-type: none"> • Regulation 5 requires Proponents to ensure that fire resistant materials are used for construction of new buildings. A number of minimum specifications of materials are provided in this rule. 	<p>The proponent is expected to comply with the requirements of L.N. 59: Fire Risk Reduction Rules, 2007 by</p> <ol style="list-style-type: none"> i. Carrying out, and record, a fire risk assessment identifying any possible dangers and risks. ii. Reducing, or where possible remove, the risk of fire and take precautions to deal with the remaining risks.

-
- Regulation 6 requires that all flammable materials be stored in appropriately designed receptacles. Some of the flammable materials anticipated at the project site including; fossil fuel using running construction equipment and vehicles (during construction phase) and stand by generator (operation phase)
 - Regulation 7 requires that all flammable storage tanks or flammable liquid containers be labelled with the words "Highly Flammable" in English or Swahili. It is therefore practical for the Proponent to use a system similar to the Hazardous Material Identification System of labelling their product containers. The regulation requires a Proponent to consult the product's MSDS for appropriate labelling requirements.
 - Regulation 8(3) requires a Proponent to have a Spill Prevention, Control, and Countermeasures (SPCC) plan. This may be important if there will be chemicals stored in the refuelling area at the construction site.
 - Regulation 16 requires Proponents to ensure that electrical equipment is installed in accordance with the respective hazardous area classification system. It is also a requirement that all electrical equipment is inspected every six months by a competent person and the
 - iii. Putting in place protection measures if there are flammable or explosive materials used or stored on the premises.
 - iv. Developing an emergency plan should a fire occur which includes evacuation procedures etc.
-

Proponent is required to keep records of such inspections.

- Regulation 22 provides a description of the functions of a fire-fighting team.
- Regulation 23 requires Proponents to mandatorily undertake fire drills at least once a year.
- Regulation 33 requires Proponents to have adequate fire water storage capacity. As a minimum this regulation requires Proponents to have at least 10 cubic meters of dedicated fire water storage capacity.
- Regulation 34 requires Proponents to develop and implement a comprehensive written Fire Safety Policy. This policy should contain a Fire Safety Policy Statement signed by the CEO, a Fire Safety Policy Manual and a brief summary of the Fire Safety Policy of the company.
- Regulation 35 requires a Proponent to notify the nearest Occupational S&H area office of a fire incident within 24 hours of its occurrence and a written report sent to the Director of DOSHS within 7 days.

13. THE ENERGY ACT, 2019

The Energy Act deals with all matters relating to all forms of energy including the generation, transmission, distribution, supply, and use of electrical energy, as well as the legal basis for establishing the systems associated with these purposes. The Energy Act also established

The proponent is in line with the Energy act regulations in the following ways;

- The proponent has identified an available site
- alignment of the Mini-Grid Project to County development plans;

Energy and Petroleum Regulatory Authority (EPRA) in place of the Energy Regulatory Commission (ERC), whose mandate is to regulate all functions and players in the energy sector. One of the duties of the EPRA is to ensure compliance with environmental, health, and safety standards in the energy sector, as empowered by Section 99 of the Energy Act, 2019. In this respect, the following environmental issues will be considered before approval is granted:

- The need to protect and manage the environment and conserve natural resources; and
- The ability to operate in a manner designated to protect the health and safety of the project employees, the locals, and other potentially affected communities.

An ESIA approved by NEMA must support licensing and authorisation to generate and transmit electrical power.

- Part VI Section 121 (1a) stipulates that the EPRA shall, before issuing a license, take into account the impact of the undertaking on the social, cultural or recreational life of the community.
- Part VI Section 121(1b) stipulates that the EPRA shall, before issuing a license, take into account the need to protect the environment and to conserve natural resources in accordance with

- the Mini-Grid proponent has the technical and financial capability to conduct the project
- The proponent has conducted the necessary engagement with the community.

the Environmental Management and Coordination Act.

- Part VI Section 136 (1a) stipulates that it shall be the duty of a transmission licensee to operate, maintain (including repair and replace if necessary) and protect its transmission grid to ensure the adequate, economic, reliable and safe transmission of electricity; and

14. THE ENERGY (SOLAR PHOTOVOLTAIC SYSTEMS) REGULATIONS, 2012	These regulations shall apply to a solar PV system manufacturer, importer, vendor, technician, contractor, system owner, a solar PV system installation and consumer devices. The Regulations prohibits any person from designing or installing any solar PV system unless he/she is licensed by EPRA.	The Regulations regulates, the design and installation of PV systems. The Proponent will ensure that persons engaged in the designing and installation of the Mini-Grid are licensed by EPRA
15. THE PUBLIC HEALTH ACT (CAP. 242)	The Act prohibits the project proponents from engaging in activities that cause environmental nuisance or those that cause danger, discomfort or annoyance to inhabitants or is hazardous to human and environmental health and safety.	The proponent will be in line with the regulations of this act and will ensure suppression of infectious diseases and maintain proper sanitation during all the phases of the project.
16. COMMUNITY LAND ACT, 2016	This Act is critical for the proposed project is within community land. Section 6(1) of the Act provides that 'county governments shall hold in trust all unregistered community land on behalf of the communities for which it is held'. Furthermore, Section 6(2) maintains that 'the respective county government shall hold in trust for a	The proposed project site falls on unregistered community land set aside by the community for development projects. The community has since offered to the land in kind for project use. The establishment of the minigrd will convert communal land to industrial use for long term. Further, based on community need assessment the proponent will undertake in kind development project to support the community and

community any monies payable as compensation for compulsory acquisition of any unregistered community land'. Therefore, the proposed road project can access land or water resources in community land that may be unregistered and pay compensation to the County Government which the law authorizes to hold such monies in trust for the communities.

Section 30(1) states that 'Every member of the community has a right to equal benefit from community land'. Section 26(1) provides that 'a community may set aside part of the registered community land for public purposes' and Sub-section (2) holds that 'where land is set aside for public purposes under Sub-section (1), the (Land) Commission shall gazette such parcel of land as public land'. This provisions offer a window for the proposed project to acquire land for project works legally for communities as necessary and to convert the same into public land. This is useful for the project as once done powerful groups will not have opportunity to exclude them on account of their socio - economic statuses. In any event, Section 35 holds that, 'subject to any other law, natural resources found in community land shall be used and managed-

- (a) Sustainably and productively;
- (b) For the benefit of the whole community including future generations;
- (c) With transparency and accountability; and

they have requested for improved water supply and improvement of the existing medical facility.

The proponent should adhere to the provision of this legislation

(d) On the basis of equitable sharing of accruing benefits.

The concept of community land has been defined broadly enough to include VMGs. Women, children, old people and future generations have been thought of as beneficiaries and thus their rights secured in this Act

-
- | | | |
|--|---|---|
| <p>17. HIV AIDS PREVENTION AND CONTROL (CAP 246A)</p> | <p>This Act is to promote public awareness about the causes, modes of transmission, consequences, means of prevention and control of HIV and AIDS. It also seeks to positively address and seek to address conditions that aggravate the spread of HIV infection.</p> | <p>Like other projects, the proposed project is expected to attract new people to the project area seeking employment. This can lead to increased transmission of HIV/AIDS and other sexually transmitted diseases (STDs) as they engage in sexual relationships amongst themselves and/or local community members. In line with the requirements of this Act, the Contractors will create awareness and sensitize the workers and other persons on the risks of infections to foster prevention and control.</p> |
| <p>18. THE PHYSICAL AND LAND USE PLANNING ACT, 2019</p> | <p>This Act of Parliament makes provision for the planning, use, regulation and development of land and for connected purposes.</p> <p>The objects of this Act related to the project include;</p> <p>(a) the principles, procedures and standards for the preparation and implementation of physical and land use development plans at the national, county, urban, rural and cities level;</p> <p>(b) the procedures and standards for development control and the regulation of physical planning and land use; (d) a framework for the co-ordination of physical and land use planning by county governments;</p> | <p>The proposed site is not in contravention of any Zoning regulations. The project site is within unregistered community land; necessary county approvals will be sought by the proponent e.g., project design approval and change of use. The approvals shall be issued by the Physical planner in the department of Lands, Housing and Urban Development – Turkana County.</p> |
-

(c) a framework for equitable and sustainable use, planning and management of land;

4.3.1 Administrative Framework

In 2001, the Government established the administrative structures to implement the Environmental Management and Co-ordination Act of 1999 (EMCA). The main administrative structures are described in the following sections:

Table 8. Administrative stakeholders and their roles

Stakeholders	Role
NEC	<p>The National Environmental Council is responsible for policy formulation and directions for the purposes of EMCA. The Council also sets national goals and objectives and determines policies and priorities for the protection of the environment.</p> <p><i>The proponent should ensure that the project abides by the set goals and objectives of the Council.</i></p>
NEMA	<p>The responsibility of NEMA is to exercise general supervision and co-ordination over all matters relating to the environment and to be the principal instrument of Government in the implementation of all policies relating to the environment.</p> <p><i>This ESIA has been prepared for submission to NEMA for review and approval prior to the commencement of the Project activities, in compliance to the EMCA.</i></p>
PCC	<p>EMCA has also established a Public Complaints Committee, which provides the administrative mechanism for addressing environmental harm. The Committee has the mandate to investigate complaints relating to environmental damage and degradation. The members of the Public Complaints Committee include representatives from the Law Society of Kenya, NGOs, and the business community.</p> <p><i>The proponent should address all issues arising from the Project in accordance with the above requirements, including a clear policy of stakeholder engagement and feedback.</i></p>
WRA	<p>Water Resources Authority is responsible for regulation of water resources issues such as water allocation, source protection and conservation, water quality management and pollution control and international waters. One of its functions among others is to receive water permit applications for water abstraction, water use and recharge and determine issue, vary water permits; and enforce the conditions</p>

of those permits as well as formulate and enforce standards, procedures and Regulations for the management and use of water resources and flood mitigation.

The project area experiences serious water scarcity and the main source is Lake Turkana. The proponent will have to purchase water for drinking and have pumping tools in place to pump water from the lake.

4.4 INTERNATIONAL SAFEGUARDS REQUIREMENTS

The table below shows the applicability of World Bank Operational OPs to the proposed project in Nachukui site;

Table 9. World Bank Operational OPs to the proposed project

S.No.	Safeguard Policy	Objective	Applicability
1.	Environment Assessment (Operational Policy, OP/BP 4.01)	The objective of this policy is to ensure that Bank-financed projects are environmentally sound and sustainable, and that decision-making is improved through appropriate analysis of actions and of their likely environmental impacts. This policy is considered to be the umbrella policy for the Bank's environmental 'safeguard policies.	The policy is applicable to this project because there are environmental and social concerns associated with the construction and operation of the proposed project. In response, REREC has commissioned and Environmental impact assessment in order to identify and address the potential impacts to a level that is acceptable.
2.	Natural Habitats (Operational Policy, OP/BP 4.04)	This policy recognizes that the conservation of natural habitats is essential to safeguard their unique biodiversity and to maintain environmental services and products for human society and for long-term sustainable development. The Bank therefore supports the protection, management, and restoration of natural habitats in its project financing, as well as policy dialogue and economic and sector work. The Bank supports, and expects borrowers to apply, a precautionary approach to natural resource management to ensure opportunities for environmentally sustainable development. Natural habitats are land and water areas where most of the original native plant and animal species are still present. Natural habitats comprise many types of terrestrial,	The proposed project may be in or close to areas with natural unique flora and fauna though the component is unlikely to have significant negative impacts on natural habitat. Works will nevertheless be implemented in an area in Nachukui that may not negatively affect diverse flora, fauna, and avifauna. The main flora in the project area is shrubs, mathenge plant and acacia trees. Additionally, caution will be taken to ensure minimum disruptions to habitats as guided by the ESMP.

		freshwater, coastal, and marine ecosystems. They include areas lightly modified by human activities but retaining their ecological functions and most native species.	
3.	Indigenous Peoples (Operational Policy 4.10)	The objective of this policy is to (i) ensure that the development process fosters full respect for the dignity, human rights, and cultural uniqueness of indigenous peoples; (ii) ensure that adverse effects during the development process are avoided, or if not feasible, ensure that these are minimized, mitigated or compensated; and (iii) ensure that indigenous peoples receive culturally appropriate, gender and inter-generationally inclusive social and economic benefits.	The policy is applicable because the main inhabitants of Nachukui are Turkana. Other minority tribes include; Merrile from Ethiopia, Kalenjin and Luhya. Turkana are classified as a marginalized group in Kenya. The proponent will continue to engage the beneficiaries in a culturally appropriate way and allow for decision making in a free, prior and informed consent manner throughout the phases of the project.
4.	Involuntary Resettlement (Operational Policy, OP/BP 4.12)	The objective of this policy is to (i) avoid or minimize involuntary resettlement where feasible, exploring all viable alternative project designs; (ii) assist displaced persons in improving their former living standards, income earning capacity, and production levels, or at least in restoring them; (iii) encourage community participation in planning and implementing resettlement; and (iv) provide assistance to affected people regardless of the legality of land tenure.	The policy is triggered for the entire project because there is land acquisition for the Mini-grid, Wayleaves, contractor facilities and worker's camps.

5.1 AREA OF INFLUENCE

The Area of Influence (Aoi) of the project comprises of the project site and the surrounding area, where the influence of the project activities is anticipated. The areas likely to be affected by the project and its associated activities include:

- The areas where project activities and facilities operated and managed by the Ministry of Energy, Kenya Power and Lighting Company (KPLC), will be established,
- Project site where project components such as solar modules, control room and transmission line to power grid sub-stations; and any other selected CSR project, such as the construction water abstraction and distribution points will be established
- Areas where impacts from unplanned but predictable developments caused by the project that shall occur later or at a related location such as increase in traffic on the approach road;
- Areas where there is biodiversity or on ecosystem services upon which affected communities' livelihood are dependent; and
- Areas where associated facilities will be established e.g. approach road construction and widening of existing road.

Further to this, the Aoi with respect to the environmental and social resources was considered based on the following reach of impacts:

Air Quality

- Impact on ambient air quality from vehicle exhaust;
- Impact of air pollutants emission from construction activities and
- Dust fall- typically up to 200 m from construction activities

Noise

- Noise impact area (defined as the area over which an increase in environmental noise levels due to the project can be detected) - typically 500 m from operations and 200 m from the access road

Water

- Surface water body- typically 500 m upstream and downstream of water intake point and downstream of discharge point
- Other surface water bodies within 1 km of the project footprint
- Groundwater in 1-2 km radius of project footprint

Flora and Fauna

- The direct footprint of the project comprising the project site
- The areas immediately adjacent to the project footprint within which a zone of ecological disturbance is created through increased dust, human presence and project related activities (e.g., trampling, water intake/outfall, transportation). This kind of disturbance has been estimated to occur within the project footprint and surrounding areas of about 500 m to 1 km from the activity areas. Based on the above the Aoi for environmental studies was limited to 5 km from the project site.

Socio-economic/Social

The Aoi for social receptors was fixed to include 2 km radial zone which has been developed based on the reconnaissance site visits and stakeholder consultations with the local community. The Aoi for development of the social baseline is within Nachukui Sub-Location. The socio-economic information presented in this report has drawn from primary socio-economic survey and the Population and housing census 2019, Kenya Bureau of Statistics (KBS).

5.1.1 Project Footprint Area

The site is located at the 1.24km from Lake Turkana in Nachukui village, Nachukui sub-location, Ngissinger Location, Turkana North Sub-county, Turkana County.

The proposed solar mini grid will be located on an approximate 1.252 Ha piece of land. The proposed project site is generally flat and the area is characterised by sandy loamy soils.

The site is on communal land- Unregistered community land that was set aside for development projects.

5.2 ENVIRONMENT BASELINE

5.2.1 Land and Land Use

Farming and agriculture according to the FGDs conducted is not practiced in the area. The area is majorly arid and doesn't support agriculture. The major economic activity of the resident community in Nachukui is fishing due to the close proximity to Lake Turkana, small scale businesses and Minimal pastoralism. The search for pasture can go as far as 300km away.

The land on project site does not and cannot support growth of pasture hence it is rarely used as feeding ground for cattle. It has mainly shrubs, Mathenge plants and acacia trees. The most common animals that are domesticated include camels, sheep, and goats. The power Mini-grid site is located Nachukui village, Nachukui sub-location Ngissinger Location, Turkana County. Geographically, the site is located on latitude 4° 3'43.16"N and longitude 35°52'50.27"E. The proposed project site is located 0.19km from Capilla Nachukui, 0.49km from St. John the Evangelist Catholic, 1.24km from Lake Turkana and 0.24km Nachukui Primary School.

The proposed project site is generally flat and the area is characterised by highly sandyloam soils. Nachukui site is an unregistered community land is located Nachukui village, Nachukui sub-location Ngissinger Location, Turkana County. The proposed project site is located 0.19km from Capilla Nachukui, 0.49km from St. John the Evangelist Catholic, 1.24km from Lake Turkana and 0.24km Nachukui Primary School. The proposed project site is generally flat and the area is characterised by highly sandyloam soils. These community's livelihoods will not be affected by the project. This is because the land identified by the community to set up the mini-grid had already been set aside for community facilities/services. The total estimate of the land proposed for the mini-grid is 1.252 hectares. The beneficiaries of Nachukui mini-grid live permanently in the area and are the main users of the land.

An abbreviated Resettlement Action Plan (A-RAP) outlining the principles and procedures for land acquisition and compensation is annexed to this ESIA (**Annex 6**). An A-RAP applies where affected persons are not physically displaced, and less than 10% of their productive assets are lost, or fewer than 200 people are displaced. In the case of KOSAP sub-projects, there is no physical displacement of affected persons, and the foreseen impacts on livelihoods, such as grazing occasioned by mini-grid construction, wayleaves acquisition, and implementation of community projects, are considered minor. A-RAPs will be implemented for sub-project sites on the unregistered community land

Land in the community is mainly communal and is also used for homesteads and harnessing underground water. The Nachukui Centre near the project site also comprises of residential houses and institutions like Nachukui primary schools and Nachukui clinic.



Plate 2: Nachukui Centre

5.2.2 Topography

Most of the Larger Turkana consists of low-lying plains, with isolated mountainous and hilly ranges. The altitude rises from about 900 m at the foot of the escarpment marking the Uganda border to the West and then falls to 369 m to the shores of Lake Turkana in the East.

Isolated mountains are mainly found in the central area with plains around Lodwar and more specifically the Lotikippi plains in Turkana north. In the southeast, the Suguta valley follows a tectonic trough bordering the Samburu uplands. Turkana has three distinct physical features, Lotikippi plains in the north, the Kalokol/Turkwel/ Kerio lowlands along the western shores of Lake Turkana and the Suguta basin in the southeast. Volcanic rocks formed from widely varying compact ash cinder and flow materials cover a third of Turkana North. The area soils are mainly sandy loam soils. The area is prone to seasonal flash flooding during the rainy seasons which makes roads impassable especially along seasonal water ways. The terrain at the project site is flat which would be ideal for the mounting of the solar panels supporting structures.

5.2.3 Hydrogeology and Drainage

Turkana County is within Africa's Tectonic region in the Great Eastern Rift Valley. It is on altitude of 360 meters while the surrounding basin's elevation varies between 375 and 914 meters. The county has several rivers with the major ones being Turkwel and Kerio both originating in the highlands to the south. Most rivers are seasonal. Kerio is a river in Rift Valley province; it flows northward into Lake Turkana. It is one of the longest rivers in Kenya, originating near the equator. In south it flows through the Kerio Valley between Tugen Hills and Elgeyo escarpment. The river also partly bounds the South Turkana National Reserve. The river starts from Eldamaravin and ends at Lake Turkana. Turkwel River is a river flowing from Mount Elgon in the border of Kenya and Uganda to Lake Turkana. The river is called Suam River from its source to the border with the West Pokot District of Kenya.

Lake Turkana where the project area lies at the western shores is the only lake with water from two distinct catchment areas of the Nile. The project area is predominantly arid with most of water resources being underground. In Nachukui there are two sources of water; one drilled borehole and surface water from lake Turkana.

Nearby geological features include the Lokitaung Gorge and the Lubur Sandstone sedimentary sequence, more than 500 meters (1,600 ft) thick. The Lubur Sandstone likely dates to the Cretaceous age of the Mesozoic, and includes dinosaur, turtle and crocodilian fossil bones.

5.2.4 Ecology

The project area is characterised with large areas with bare soil and vegetative cover. The remainder is predominately moderate or senescent cover, representing those plants that are in the process of aging. Vegetation types in the county are diverse and include patchy, annual grassland and herbaceous plants interspersed with woody shrubs to riverine woody tree species.

Most areas of the Nachukui are dominated by dwarf shrubs and bush species. The project area community shows greater species diversity that consists of patches of pure *Acacia reficiens*; *Acacia reficiens* mixing with dwarf *Acacia tortilis*; occasional individuals of *Acacia. paolii* and *Euphorbia cuneata*, *Acacia reficiens* and *Balanites rotundifolia*; and dwarf *Acacia. tortilis*, *Euphorbia cuneata* and *Jatropha dichter*.

Many species of fish are reported from Lake Turkana. Of economic importance include: *tilapia species*, *barbus bynie*, *labeo hari*, *Clarias lazera*, *alestes species*, *citharinus citharus*, *disticodus niloticus*, *bagrus Docmac*, *hydorcynus farskali*, *latea nilotica*.

Nachukui Landing site is among the 12 landing sites at the western shores of Lake Turkana. There exists various bird species, key among them the flamingos in Lake Turkana and wild birds around the project site.



Plate 3: Floral representation of the area

5.2.5 Water Resources

Turkana is an arid region with most of water resources being underground. The main water sources in the county are boreholes, piped water and river water. Other sources include springs, rock catchments and wells. Various seasonal streams from inland Turkana flow into the lake, the largest of which are the Kerio and Turkwel rivers. Turkwel is a permanent source of water due to the hydro-electric dam upstream, which controls the amount of water flowing into the lake. The main water sources constitute surface and ground water. There is one major borehole that was done in 2004 and Lake Turkana which is in close proximity with the area.



Plate 4: Resident fetching water from Lake Turkana

5.2.6 Ambient Air Quality

The proposed project area is located near the Nachukui main centre which can be described as generally rural with scattered vegetation. There are no major industrial developments in the area. The air quality at the proposed project sites is therefore considered to be generally good.

5.2.7 Ambient Noise Quality

In general, the project area is near the centre setting where the main source of noise is from motorists and motorbikes

5.2.8 Soil Type

The area has a shallow soil profile with a bed rock very close to the surface, hence minor civil works will be conducted at the project site for the foundation, but a deeper analysis is needed to determine the precise depth for the foundation. The soil formation on the project site is poor as there is small top soil layer profile as rock outcrops are evident across the field. The site area is highly characterised by sandy loam soils.

5.2.9 Climate and Meteorology

Turkana North has both arid and semi-arid lands (ASAL). Mean temperature ranges from a low of 24 °C to a high of 38 °C with a mean of 30 °C. The lowest rainfall recorded in the central plains around Lodwar. This area receives an annual average rainfall of 120 mm. The heaviest rainfall is experienced in the northwest area around Lokichogio, which has an average rainfall of about 430 mm. Lokitaung, Nachukui and Kaputir in the Turkwel valley to the south, have an average of 300 mm and 280 mm respectively.

The rainfall pattern and its distribution has been unreliable and erratic over the years as is evidenced from the annual figures derived from Lodwar meteorological station which range from 19 mm to 380 mm. Rain is usually accompanied by sharp thunderstorms in the late afternoons and at night. The long rains usually fall between April to June, and short rains in October - December.

5.3 SOCIO-ECONOMIC ENVIRONMENT

5.3.1 Socio-economic status of Study Area

5.3.1.1 Demographic Profile

The study area is in Nachukui sub-location, Turkana North sub county, Turkana County. Nachukui which has a peri-urban setting has approximately 78% of households roofing with thatch and 10% corrugated iron sheets and the rest covered with Polythene. Majority of households have lived in their current location for 20 years or less while a significant proportion for less than 10 years. The main dominant tribe is Turkana while the minority tribes include; Kalenjin, Luhya and the Merille from Ethiopia. Christianity is the dominant religion. The approximate population in Nachukui is 5563 with an approximate 335 households present. Nachukui has a gender ratio that is currently estimated to be about 45% male and 55% female with 80% Indigenous and 20% settlers.



Plate 5: Main Housing types

Table 10 below presents a summary of demographic profile of Nachukui

Table 10: Summary of the Demographic profile

Attribute	Magnitude/Number
Approx. population	5563
Households	335
Gender.	Male – 45% Female – 55%
Ave. No. per household	10 per household
Indigenous	Indigenous- 80% Settlers – 20%
Vulnerable classes	<ul style="list-style-type: none"> • Widows-approximately 70 • Orphans –approximately 350 • Persons Living with Disabilities- Approximately 170 • The elderly (80 years and above)- approximately 100
Dominant ethnic group	Turkana
Primary religion	Christianity
Other groups	Kalenjin, Luhya and Merille from Ethiopia
Employment (formal/Informal)	Formal – 5% Informal – 95%

5.3.1.2 Educational Infrastructure

Existing schools within the location include Nachukui Primary, St. Joseph Primary, St. Bakite Primary, Nariokotome Primary and Nariokotome girls secondary school. Nachukui Primary is the closest to the project area. ECDs in Nachukui include; Nachukui ECD, Nariokotome, Kalokudo, Narengeioi and Kaloiyara.

Nachukui Primary School has 6 teachers (5 males and 1 female) and they are all TSC. The main challenges faced by the school include; Lack of toilets, a perimeter fence, understaffing, water and food. The school enrollment is 219 boys and 209 girls. It's a low cost boarding school accommodating both boys and girls. The school has solar panels but with no batteries. It also lacks the basic equipment's needed. The average distance a child walks to school is 2km



Plate 6: Nachukui Primary School

5.3.1.3

Occupation and Livelihood Profile

Nachukui lies along the western shores of Lake Turkana. Fishing is the main economic activity of the area, despite the populations' pastoral background. As such, the most valuable productive assets are fishing equipment (boats, nets, lines and hooks), whereas the importance of livestock to household income is relatively small.

Fish is sold fresh, dried, salted and smoked depending on the distance to the market. Nachukui has one of the largest landing bays on the west side of Lake Turkana. Higher levels of income in the area is derived from the sales of fresh fish, which is transported directly to Nairobi.

Women are less engaged in fishing activities; they collect and sell firewood and charcoal and make baskets and mats from doum palm leaves, which they sell inside and outside the area. The absence of large scale agriculture and the small herd sizes, mean households must purchase most of their food. The youths are also involved in small businesses like clothe business and motorbike business



Plate 7: Fishing Boats and available fishing gears

5.3.1.4

Land Use

Land in Nachukui is mainly communal. The land has several uses which are but not limited to construction of houses, economic activities and subsistence activities. The major economic activity of the resident community in is fishing hence land is minimally utilised for commercial entrepreneur areas, homesteads and as a source of food for the animals. The land on project site does not and cannot support growth of pasture hence it is rarely used

as feeding ground for cattle. The most common animals that are domesticated include camels, sheep, and goats. The area does not support agriculture.

5.3.1.5 Social and Physical Infrastructure

Public and private institutions found in the project area include: schools and health facilities. The institutions observed in the area during the field visit include;

- Nachukui Primary, St. Joseph Primary
- St. Bakite Primary
- Nariokotome Primary
- Nariokotome girls secondary school.

ECDs in Nachukui include;

- Nachukui ECD
- Nariokotome
- Kalokudo,
- Narengeioi
- Kaloiyara.

The main health facility in the area is Nachukui Dispensary which is 500m from the site and is normally open from 8 a.m to 5p.m and offers ANC, OPD, Mobile Clinics, Maternity, Mother Child Health Services. The dispensary currently has 5 staff (1 nurse, 1 patient attendant and 3 subordinate staff). The centre is accessible to almost 80% of the population. Other dispensaries near the project site are Narengeioi which is 5km from the site and Nariokotome dispensary that is 7km from the site.

The main source of water in the area include a borehole that was drilled in 2004 and Lake Turkana which has untreated water.

The poor state of the roads in the area coupled with harsh terrain makes transport cost high. The area is not served by reliable means of transport and the locals are forced to trek long distances. Camels and donkeys are used for transporting goods. The road network is poorly developed and maintained and the deep sand makes them impassable. During the rainy season the roads are impassable and one has to wait until the floods subside.

5.3.1.6 Vulnerable groups

According to the World Bank Document-Vulnerability: A View from Different disciplines by Jeffry Alwang and Paul B. Siegel, a vulnerable group is a population that has some specific characteristics that make it at higher risk of falling into poverty than the others.

The categories of vulnerable groups identified at the project area include:

- Widows-approximately 70
- Orphans –approximately 350
- Persons Living with Disabilities- Approximately 170
- The elderly (80 years and above)- approximately 100

The vulnerable households can hardly access the basic needs. The project should consider such households for electricity connection. Most of them cannot afford the one thousand shillings' connection fees.

5.3.1.7 Gender based vulnerability

During the Female Focus Group Discussion and in-depth interviews, it was reported that the men are the main controllers of resources that include land, assets and equipment's and the women have no control of assets. The men control livestock, land and settlement areas. The men have equal opportunities with the women except in education matters. The main

challenges that women and girls face include; lack of finances and poverty, trekking for long distances to fetch water and fuelwood and early marriages. It was noted that the community has rampant male chauvinism and women have minimal opportunities in decision making processes in the area.

In a typical household, the head of the household is the eldest male members, while the decision making authority is the man. In addition to this, men are responsible for ensuring the financial security of the family. Girls have access to education but it's not the same case for women.

5.3.1.8 Gender Based Violence

During the women FGD, it was noted that cases of GBV are reported in the area. They mainly arise due to misunderstandings in early marriages and Psychological torture between married couples. The women noted that there were no support centres in the area to curb the cases. They wish that empowerment is done to women and men about the effects of GBV and how to stop the cases.

5.3.1.9 Culture and heritage

No cultural site of significance was reported/observed within 10Km project area. The community in the project area are a patriarchal society; men typically speak for women and make decisions in the family. The Predominant community which is Turkana practices polygamy and encourages early marriages for young girls. The main festivals and rituals undertaken in the community is Akuta(Marriage) and Asapan(Circumcision)

5.3.1.10 Religion in the project area

The community members are predominantly Christian with three main churches in the area;

- St. John the evangelist Catholic Church
- Lego Maria
- Full Gospel Church
- Pentecostal assemblies of God



Plate 8: One of the churches in the area

5.3.1.11 HIV/AIDS prevalence

The county has an HIV/AIDS prevalence of 4.0% by 2015, below the national average of 5.9% (NACC, 2016). Mother to child HIV transmission rates was at 7.9% in 2017. Prevalence rates of sexually transmitted illness especially HIV/AIDS is low in the area as confirmed by the nurse at Nachukui Dispensary.

6 STAKEHOLDER ENGAGEMENT

This section profiles the key stakeholders of the Nachukui site solar project and assesses their potential concerns and levels of influence. The process of stakeholder engagement involved;

- i. stakeholder identification and analysis
- ii. planning for the stakeholder engagement;
- iii. disclosure of information;
- iv. consultation with stakeholders
- v. addressing and responding to grievances; and
- vi. reporting to stakeholders

6.1 STAKEHOLDER CONSULTATION AND DISCLOSURE REQUIREMENT FOR THE PROJECT

The World Bank Environmental Social OPs 10 on Stakeholder Engagement and Information Disclosure emphasises on engagement in meaningful consultations with all stakeholders. The stakeholders should be provided with timely, relevant, understandable, and accessible information, and consult with them in a culturally appropriate manner, which is free of manipulation, interference, coercion, discrimination, and intimidation.

A documented record of stakeholder engagement, including a description of the stakeholders consulted, a summary of the feedback received, and a brief explanation of how the feedback was been explained in this chapter. The respective minutes and list of participants for the public consultation undertaken in Nachukui Centre is enclosed under appendices of this report. Further, an initial communication was shared with the county commissioner and Deputy County Commissioner for Turkana, prior to the public participation meeting held on 15/01/2022. Background information document (BID) with project details was posted clearly at one conspicuous area at the Nachukui centre for all to see and read it.

6.2 STAKEHOLDER CHARACTERISATION AND IDENTIFICATION

Stakeholders are classified in the following two categories;

- **Primary Stakeholders-** Stakeholders who have a direct impact on or are directly impacted by the project.
- **Secondary Stakeholders-** Stakeholders who have an indirect impact or are indirectly impacted by the project.

In line with the nature of the project and its setting in Nachukui the stakeholders have been identified and listed in the table given below;

Table 11: Identified stakeholders

Stakeholder Groups	Primary Stakeholders	Secondary Stakeholders
Community	Local Labourers Land sellers Project beneficiaries VMG's Local Community	Fishermen Pastoralists
Institutions	Faith Based Organisations Education institutions Community Based	

	organisations
Government Bodies	County Government District and local administration NEMA

6.2.1 Stakeholder Mapping

Stakeholder mapping“ is a process of examining the relative influence that different individuals and groups have over a project as well as the influence of the project over them. The purpose of a

stakeholder mapping is to:

- Identify each stakeholder group;
- Study their profile and the nature of the stakes;
- Understand each group’s specific issues, concerns as well as expectations from the project
- Gauge their influence on the Project;

The significance of a stakeholder group is categorized considering the magnitude of impact (type, extent, duration, scale and frequency) or degree of influence (power and proximity) of a stakeholder group and urgency/likelihood of the impact/influence associated with the particular stakeholder group in the project context. The magnitude of stakeholder impact/influence is assessed taking the power/responsibility and proximity of the stakeholder group and the group is consequently categorized as negligible, small, medium or large. The urgency or likelihood of the impact on/influence by the stakeholder is assessed in a scale of low, medium and high. The overall significance of the stakeholder group is assessed as per the matrix provided in Table below.

Table 12: Stakeholder Significance and Engagement Requirement

		Likelihood of Influence on/ by Stakeholder		
		Low	Medium	High
Magnitude of impact	Negligible	Negligible	Negligible	Negligible
	Small	Negligible	Minor	Moderate
	Medium	Minor	Moderate	Major
	Large	Moderate	Major	Major

6.3 STAKEHOLDER ANALYSIS

The Stakeholder influence and priority have both been primarily rated as:

- **High Influence:** This implies a high degree of influence of the stakeholder on the project in terms of participation and decision making or high priority to engage with the stakeholder;
 - **Medium Influence:** Which implies a moderate level of influence and participation of the stakeholder in the project as well as a priority level to engage the stakeholder which is neither highly critical nor are insignificant in terms of influence; and
 - **Low Influence:** This implies a low degree of influence of the stakeholder on the project in terms of participation and decision making or low priority to engage that stakeholder.
- The intermediary categories of low to medium or medium to high primarily imply that their influence and importance could vary in that particular range subject to context specific conditions or also based on the responses of the project towards the community.

The coverage of stakeholders as stated above includes any person, group, institution or organization that is likely to be impacted (directly or indirectly) or may have interest/influence over project. Keeping this wide scope of inclusion in stakeholder category and the long life of project, it is difficult to identify all potential stakeholders and gauge their level of influence over project at the outset of the project. Therefore, the project proponent is advised to consider this stakeholder mapping as a live document which should be revised in a timely manner so as to make it comprehensive for any given period of time.

Table 13: Summary of Stakeholder Influence

Stakeholder Category	Relevant Stakeholders	Magnitude of Influence/Impact	Urgency/Likelihood of Influence	Overall rating of stakeholder rating
Primary Stakeholders	Community land owners	Medium	Low	Minor
	Local Labourers and subcontractors	Small	Medium	Minor
	County Government of Turkana, District and local administration	Medium	Low	Minor
	FBOs, CBOs and Educational Institutions	Medium	Low	Minor
	VMGS Local community			
Secondary Stakeholders	Fishermen	Small	Medium	Minor
	Pastoralists	Small	Medium	Minor
		Medium	Low	Minor

6.4 KEY FEEDBACK RECEIVED DURING COMMUNITY CONSULTATIVE MEETING LEADINS TO LAND IDENTIFICATION AND GRC CONSTITUTION – SCREENING LEVEL

Minutes of the community consultation meeting held on 13/03/2021 at Nachukui market centre. Detailed minutes are attached to this report (**Annex 5**) The Assistant Chief Mr. Lazarus Epae said residents belong to the Ngissiger Clan of the Turkana tribe and main economic activity is fishing. There are 890 Households, 32 (disabled persons), 24 Windows and 40 old and vulnerable people. Proposed Location of the minigrig is not sited near any sensitive place and neither is any resettlement is envisaged.

James lokeng said some people had come take dimensions of area and some residents were present. After the meeting we shall all go there for community and validate. He then invited the project team to address the meeting.

Ms Myra Mukulu informed the participants that the proposed project is part the Kenya off Grid Solar Access Project (KOSAP) which is funded by the World Bank and is being implemented by the Ministry of Energy, the Kenya Power and Lighting Company (KPLC) and the Rural Electrification and Renewable Energy Corporation (REREC). MoE will provide overall coordination of the Project including responsibility for safeguards due diligence, and compliance monitoring. REREC will implement the mini grid and will be responsible for the implementation of Resettlement Framework Plan, Environmental Social Management Framework and Social Assessment. She said the Government is committed to providing electricity to communities that have not been served by the national grid such as Nachukui because it recognises energy as a key development enabler.

She said KOSAP entails the following components;

1. Provision of electricity through solar mini grids to households, enterprises and community facilities,
2. Provision of energy services through solar home systems for and clean cooking technologies for households
3. Provision of solar power to electrify boreholes as well as to power community facilities
4. Community engagement and education as well as capacity building and institutional support for the national and county Governments

She further, said KOSAP is being implemented in 14 counties. In Turkana County 23 minigrid sites, 98 stand-alone solar facilities (public facilities) and 38 boreholes (solarisation) had been identified. One of these minigrid sites is Nachukui.

She noted that the agenda of the visit was to; undertake an environmental and social screening of the proposed project site, to sensitize the community on the project land requirements and community rights and entitlements, explain the Project Technical Description and connection requirements, discuss potential environmental/social risks and impacts and mitigation and sensitize members on grievance redress mechanism.

6.4.1 Project Land Requirements: Rights and Entitlements Options and Implications

The Surveyor, Ms. Agnes Gachoki told the Baraza that the main purpose of the Baraza was to seek community consent for land donation for the project. Land required for the construction of the Mini grid is 3-5 acres. In Nachukui, Land falls under the Community land category. It is yet to be registered, has no title but is jointly owned by the community. Its use and management is governed by the Community Land Act 2016.

She explained the various forms of acquiring in land including; allocation, land adjudication process, compulsory acquisition, settlement programs, transfers, donation and long-term leases.

The Surveyor informed the meeting that if they opted to consent to donation of the project land, following VLD criteria has to be met;

VLD criteria

1	The infrastructure must not be site specific.
2	The impacts must be minor, that is, involve no more than 10 percent of the area and require no physical relocation.
3	The land required to meet technical project criteria must be identified by the affected community, not by line agencies or project authorities
4	The land in question must be free of squatters, encroachers, or other claims or encumbrances.
5	Verification (for example, notarized or witnessed statements) of the voluntary nature of land donations must be obtained from each person donating land.
6	If any loss of income or physical displacement is envisaged, verification of voluntary acceptance of community-devised mitigatory measures must be obtained from those expected to be adversely affected.
7	If community services are to be provided under the project, land title must be vested in the community, or appropriate guarantees of public access to services must be given by the private titleholder.
8	Establishment of Grievance mechanisms

Agnes also told the community on their rights and entitlements to the following;

1. They can refuse to donate the land.
2. They can opt to seek compensation for the project land.
3. They can refuse or accept the project.
4. The right to resettlement assistance in addition to compensation for affected assets, where the more vulnerable individuals/households have been identified among them.
5. The right to livelihood restoration measures where the project has impacted their livelihood strategies, if they choose compensation.

The surveyor further informed the meeting that there were several options on land compensation;

- a) Payment of cash for the land that has been identified for the project. For this to take place the land is has to be valued first. All monies payable as compensation for acquisition unregistered community land are then held in trust by the county government. Any such monies shall be deposited in a special interest earning account by the County Government and shall be released to the community upon registration of the community land.
- b) Compensation of land for land. The community would identify a similar piece of land in value to the project site and request that the same is purchased for the community.
- c) A further option is compensation in kind. This option is for the community to grant land for the project and request for compensation in kind. This could be in the form of a project for the benefit of the community like the construction of classrooms or a borehole. This is the most preferred option.

She said the surveyor will need to pick exact GPS points of the land proposed for the project and with community consent the land will be registered in the name of the implementing agency. The surveyor encouraged the community to make an informed decision that collectively involved every member of the community the elders, men, women, the marginalised and PLWDs. Any land donation would have to be signed by at least five representatives nominated by the community. She disclosed to the meeting what the term advance possession on land issues meant and requested them to consider allowing the implementing agency to take

possession of the parcel and commence construction of the project even as the land transfer process is going on.

6.4.2 Project technical description, wiring, connection and payments

Mr. Lawrence Lorika from KPLC told the meeting the proposed mini grid will comprise a solar system and a thermal unit (generator). The Mini-grid will have a capacity of 31KVA and PV 104kwp). He said all potential customers will be mapped for connection. Energy meters will be installed by KPLC staff and the locals living within the required 3 km radius would be connected to power. He said to be connected one will be required to pay a one-off connection fee of kshs.1000 as opposed to other places like Lodwar, Kitale and other big towns whereby they pay kshs.15000 or more.

Power would not be for free, and residents will be buying tokens to facilitate their needs as far electricity is concerned. Tokens can be purchased in amounts of Kshs 50 and above. Purchase is done through a vendor or directly purchasing and paying through the mobile money platforms. The token purchased through this 'Pay As You Go' (PAYG)) mechanism, will last according to the individual power usage. If you have more load for example ceiling fans and air conditioners in your shop, it will last for short period of time.

He told the Baraza that power distribution will involve passing of electrical lines along the roads in order to reach their houses, business premises and public facilities and requested the community grant way leave consent.

He said the project land where the powerhouse comprising solar panels, diesel generator, batteries and inverters will be installed will be fenced of as a safety measure and access will thus be restricted to people and animals. The minigrid system would be operating throughout the day and night. In case of overload, cloudy day or low battery, the generator will automatically kick in to supply power.

6.4.3 Social and environmental issues

The Environmental specialist Ms Irene Kawira Mate said that there were many benefits that would accrue to residents due to the supply of power to the area. She cited some of them as:

Potential positive impacts:

1. Improved educational standards as a result of longer study hours for learners.
2. Enhanced health care as Clinics/dispensaries can operate at night and store perishable drugs and vaccines
3. Employment of locals during the construction phase
4. Increased information access and entertainment (TV, Radio, Internet phones and computers).
5. refrigeration of food products like meat and milk thereby increasing their shelf life
6. Opportunity for locals to establish business ventures like hairdressing, photocopy and welding.

Potential negative impacts:

1. The land that is currently in use for grazing will now no longer be accessible to the residents as it would be fenced off.
2. The risk of electrocution due to lack of proper handling and care. The Contractor shall however educate the community on safety precautions.
3. Labour influx leading to sexual exploitation and harassment.
4. Environmental contamination may arise due to disposal of used batteries, inverters and other materials.
5. Increase in cases of Gender Based Violence and sexual harassment of workers

She affirmed that the project beneficiaries were the Yapakunur Clan, a major sub-tribe of the Turkana language group who are Indigenous people and are the only VMG residing near the sub-project area thus the sole project beneficiary. Construction of the mini grid could restrict the access of VMGs to grazing land thus affecting availability of pasture, and consequently their

main source of livelihoods, and forcing families to relocate grazing activities elsewhere. Consequently, a VMGP may not be required. The project can include specific interventions in the final ESMP to ensure the community has access to culturally appropriate benefits. The project will strive to minimize adverse impacts on the indigenous people and ensure that they fully and continuously participate in the consultation process and receive culturally appropriate benefits from construction of the mini grid. The ESIA study would be conducted before the onset of the project and an ESMP developed outlining viable mitigation measures. Screening would be undertaken to ensure that the project is designed and implemented in an environmentally and socially sustainable manner, taking into account Kenya's relevant sector legislation as well as World Bank Safeguard Policies. This would be undertaken using screening checklists in reference to requirements of the Environmental Management and Coordination Act, 1999 (amended 2019) and KOSAP-Environmental and Social Management Framework (ESMF). The screening process would consider potential impacts of the project and propose viable mitigation measures. She assured the community that temporary or minor impacts which are foreseen during project implementation will be sufficiently mitigated.

6.4.4 Grievance Resolution Mechanism (GRM)

Ms Mate informed the Baraza on the need for constitution of a locational Grievance Resolution Committee (GRC) for purposes of resolving any grievances that may arise in the lifetime of the project as guided by project frameworks. The local GRC will be the first stop shop for resolution of project related disputes and grievances for project affected persons and interested parties. The GRM should be culturally appropriate, inclusive, and accessible and developed in consultation with Nachukui community. Grievances which cannot be resolved by the local GRC shall be escalated to the sub-county GRC and the National GRC respectively. Any unresolved matter can then be referred for arbitration or to a court of law. World Bank's GRS is also available to stakeholders to lodge their grievances. The GRC should constitute representation from all genders, youth and vulnerable persons. It should be structured in such a way that it provides multiple channels for lodging grievances, ensure anonymity and confidentiality. The following details shall be recorded for each grievance reported; and a close-out form issued to indicate the grievance registered has been closed.

- a) Date of complaint
- b) Name of complainant
- c) ID of complainant
- d) Telephone contact of complainant
- e) Nature of complaint
- f) Name of the Person handling the complaint
- g) Contacts of person addressing the complaint
- h) Action taken
- i) Date of conclusion of complaint

6.4.5 Existing indigenous grievance redress mechanism

Conflicts occasionally arise within individuals and families. The Nachukui community like in all other parts of the Turkana society is endowed with elaborate and systematic traditional mechanisms of conflict management. When disputes occur, they are referred elders (*Ng'akasukou*). The elders then summon involved parties and witnesses to the meeting point (*Ekitoe Ng'akasukou*). The elders will listen to the conflicting parties/individuals, weigh adduced evidence and pronounce the verdict accordingly.

Any matter that is not resolved or when the parties are not satisfied they can report to the chief or seek discourse in a court of law.

6.4.6 Focus Group Discussions

After the main meeting women, men and youth convened for separate discussions (FGDs) where they could freely converse amongst themselves and pour out insights (hopes, fears, aspirations and expectations in relation to the mini grid and the land question).

a) FGD-MEN

The main objective of this discussion was to get gather and document how men thought/felt about the issues discussed during the main meeting including; environmental and social screening of the project site, land requirements and community rights/ entitlements, Project Technical Description and connection requirements, potential environmental/social risks and impacts, mitigation and grievance redress mechanism. The FGD would also provide them an opportunity to air their issues/give their opinions on the project.

Kioko them the FGD was a good avenue for the elders to express their opinions and freely ask any questions they might not have been unable to ask in front of the youth and women, He said that at the end of the FGD discussion the group should come into consensus on issues discussed in the earlier meeting and select a representative to the GRC. During the meeting the Men agreed to voluntary land donation and selected the following as their representatives in the GRC;

The men however said they had no further questions and proceeded to elect the following to the GRC;

Name	ID number	Telephone number
Emojong akal	0611105	Un available
Simon kio	0238897	0798223585

b) FGD WOMEN

A focus group discussion was held with women. The main objective of this discussion was to gauge whether the women had understood the project and its requirements and to provide them an opportunity to air their issues/give their opinions on the project. Myra explained to the women that it was important to hold a separate discussion with them so that they have opportunity to freely express themselves as this may have not been possible in the Baraza. The women were allowed time to ask questions, give suggestions and or seek clarifications.

From the questions in the group, it was clear that they had not understood the issue. Myra then explained that the meeting was to clarify any issues about the project on environmental and social issues as well as request land donation from the community. She explained further that the Ministry wanted land for was to construct a solar minigrid. She explained further that they should select women representatives for women to cater for their respective issues.

The women understood the issue. When asked if they had any questions on the project, they stated that they did not have any questions. Therefore Myra requested that they elect women representatives to the GRC.

The women nominated were:

Name	ID number	Telephone number
Grace Kimat Korobe	27693968	0712598953
Lochokae Esther Ekalale	24568509	0799347358

c) FGD YOUTH

The youth had no questions and went when asked to nominate members to the GRC they proposed that the members they had nominated to sign the land donation forms she serve them in the GRC

6.4.7 Review of feedback from FGDs by all community members.

After the FGDs the participants convened back to the main meeting to review the respective resolutions from the FGDs. During the meeting they expressed their support towards the project saying the benefits to the area shall be enormous. They mentioned the opportunity to light their homes, establish income generating business ventures and employment as some of the major benefits.

They resolved to freely donate land for the project, validated the nominees to the GRC and elected officials to lead the identification of project land and sign the land donation form on their behalf.

The community nominated the following as members of the GRC:

No	Name	Design.	1D No.	Mobile No.
1	Grace Kimat Korobe	Women	27693968	0712598953
2	Lochokae Esther Ekalale	Women	24568509	0799347358
3	Emojong akal	Men	0611105	Un available
4	Simon kio	Men	0238897	0798223585
5	Youth to be served by their nominees to the land donation team			

6.5 KEY FEEDBACK RECEIVED DURING ESIA STAKEHOLDER CONSULTATION

A Consultative Public Participation (CPPs) session is conducted to provide project information and facts to the local community and other stakeholders especially local government administrator thus giving them a platform to enable them to express their appreciation, concerns and fears as well as contribute ideas and opinions towards the project sustainability.

A detailed CPP and community engagement for Nachukui Solar Mini Grid was held at Nachukui center on 15th January 2022 chaired by the assistant Chief with the help of Village elders.

The meeting had 88 males and 72 females. The ESIA team spearheading the process included the following;

NAME	ORGANISATION
Kennedy Shisoka	Ministry of Energy Engineer
Lydia Komen	EIA Expert-Norken International
Japheth Kipsang Bor	EIA Expert Norken International
Umulkheir Abdi	EIA Expert-Centric Africa Limited

Allan Owino

ESS-Centric Africa Limited

Caleb Ewol

KOSAP CREO

The feedback received during the stakeholder consultation process has been summarized below.

No	NAME	Organization/ Designation	Issues/comments discussed
1.	Ekal Ebei	Community member	<p>She was concerned whether the residents will be considered for employment opportunities including women. She also wanted clarity on when the project will start.</p> <p>The consultants clarified to the community that the project encourages the participation and empowerment of the community. Skilled and non-skilled based opportunities will be available and shall be distributed fairly. The women will be considered and integrated in the project.</p>
2.	Samson Esirutu	Community member	<p>He was concerned if there will be an insurance cover in case of injuries at the site and workplace</p> <p>The consultant clarified that WIBA insurance will provide for all the workers that will be employed at the site.</p>
3.	Joseph Nabuin	Community member	<p>Joseph was concerned whether the community will be enlightened on the dangers that might be experienced. He also suggested that the contractor should engage with the community during the entire project phase.</p> <p>The consultants clarified that KPLC will offer training to the community members on how to safely use the electricity. They were urged to take part so as to avoid accidents in future.</p>
4.	Benard Eroo	Community member	<p>He recommended the contractors to have serviced fire extinguishers and safety signage's at the site.</p> <p>This was well noted by the consultant and he assured the community that all the safety measures that include fire safety measures will be in place.</p>
5.	Brenda	Community member	<p>She appreciated the project and was hopeful that the community will benefit. She insisted that the prevention of child labour should be GRCs first priority.</p> <p>This was well noted by the Consultant and he clarified that no child will be allowed to work at the site and all the stakeholders will follow a code of conduct to protect the children in the area.</p>

6.	John Meiyen	Community member	<p>He inquired on the reliability of the project.</p> <p>The consultants clarified that KPLC and the Ministry of Energy will manage the project and ensure that the power is reliable and available to the beneficiaries.</p>
7.	Thomas Namasse	Community Member	<p>Was concerned on the connection fee and cost/payment of the power.</p> <p>The consultants informed the community that the power will be supplied in prepaid(tokens) and every household will pay according to their consumption rates. The connection fee will be 1000 for each household.</p>

6.5.1 Project benefits

Some of the positive impacts that were identified by the participants include the following.

1. The power will facilitate learning activities in the available schools
2. Power will light up the area and prevent scorpion bites at night
3. The electricity that will improve business and healthcare
4. Lighting will improve the security scenario at Nachukui
5. The power will aid in water piping and pumping
6. Employment opportunities will increase for both the youth, men and the women due to increase in business opportunities and during the project construction phase.
7. Fishing will improve due to availability of better preservation methods

6.5.2 Community main concerns

Some of the main concerns raised by the community include;

- Whether the project will follow the regulations in place to minimize any negative impacts.
- Whether the Proponent and contractor will adhere to Covid-19 protocols in all the project phases.
- Employment discrimination among the locals
- Incompetent Contractor who lacks the necessary resources being given the work.
- Women not getting Employment opportunities

6.5.3 Community Requests

- The community requested the following from the project in terms of projects that will impact them if implemented:
 - ✓ 1st Priority- Improvement of clean water supply in the area by doing water reticulation and piping from Nariokotome.
 - ✓ 2nd Priority- Construction of ECD Classes.
 - ✓ 3rd Priority- Maternity ward and hospital lab at the dispensary



Plate 9: Public participation session.

6.6 SUMMARY FEEDBACK RECEIVED DURING FOCUSED GROUP DISCUSSION

The in-depth interviews were used as a tool for stakeholder identification and mobilization as well as collection of baseline data to enable identification of the likely project impacts. In addition, it provided an opportunity to the participants to raise their fears and concerns as well as make recommendation as pertains to the project.

During the discussions, information was gathered different roles, livelihood, health issues, challenges, perception of quality of life, education options for children, health care and project perception.

The Focus Group Discussions were held with Men, Women and the Youth as indicated in Table 14;

Table 14: FGD dates and attendance

Group	Date	Attendance	Venue
Men	15 th January 2022	12	Nachukui Centre
Women	15 th January 2022	30	Nachukui Centre
Youth	15 th January 2022	28	Nachukui Centre

The key concerns and expectations that were raised during the FGDs have been summarized below:

6.6.1.1 Female Stakeholders' Consultation and Participation

The females' participants in the FGD were 30 in number with an age range of 20-60. There were 10 widows and 5 divorced women in attendance. The following were their responses;

The project perception

The women indicated that they had heard of the project and understand what it entails. They stated that the project will bring a positive impact to the community via business growth, lighting of households and improving security. The project should however consider women and employ them. The inquired if there will be any grants for women to start businesses.

Women in Nachukui community and their roles as reported by the FGD

- ✓ The women undertake fishing, businesses, home chores, small scale businesses and selling firewood's.
- ✓ Women are still under men and few opportunities align to them.
- ✓ They have no control of any resources.
- ✓ They currently feel safe in the community.
- ✓ Women experience the following challenges in the community; Lack of finances/poverty, trekking for a long distance to fetch water and firewood, early marriages and the fact that they are the overall providers in the Turkana Communities.
- ✓ They receive information mainly from the chief and the village elders.
- ✓ There is no role change between women and men.

Institutions/community Development

- ✓ Women are not involved in decision making
- ✓ The main NGOs and CBOs in the area include; Save the Childre and Concern Worldwide
- ✓ The top three priority community development; Electricity and water, maternity ward and hospital lab and classrooms for schools ECD.

Economy /income generation by women

- ✓ Women earn income from selling fuel wood(Charcoal and Fuelwood) and as casual laborers.
- ✓ They stated that women tend to contribute more than men and they need to be empowered through loans and grants
- ✓ They have access to table banking and M-Pesa

Land use by women

- ✓ There are no land use activities that women engage in and they don't practice agriculture.
- ✓ The main animals reared include goats, cows, chicken and sheep.
- ✓ They noted that they have challenges with snakes and lion cabs eating their chicken.
- ✓ Natural resources are collected from Nachara Hill, 2-5 Km away
- ✓ They stated that GBV is there but moderate. They are mainly Intimate-Physical, early marriage and psychological violence.
- ✓ To address GBV empowerment to both men and women should be done.
- ✓ They stated that conflicts are sometimes there but right now its peaceful.
- ✓ Women are involved in fishing.

Education, literacy, and training of Women in Nachukui

- ✓ All girls can access education but it's not the case for women.
- ✓ Girls can read and write but not women.

Health care for Women in Nachukui

- ✓ The women access health care from Nachukui Dispensary. The services are fairly good.
- ✓ They prefer taking the ill to the hospital.

Access to Water, sanitization and hygiene by women

- ✓ The community water for drinking, washing and bathing is mainly from Lake Turkana which is 5km away. Its however salty.
- ✓ Toilet facilities comprise of 80%bush and 20% pit latrine.
- ✓ 20% of women can access Sanitary pads.

Transport and communication

- ✓ The main forms of transport are motorbikes and walking.
- ✓ The area has poor road connectivity.

6.6.1.2 Male Stakeholders' Consultation and Participation

- ✓ The male participants were 12 in number. The male participants are household heads and the ages ranged from 42 to 82 years and they were from Turkana, Luhya, Kalenjin and Merille. The following were the response during the male FGD.

The project perception

- ✓ The men are fully aware of the project since the proponent has fully engaged them.
- ✓ They insisted that the community really need the project and it will help them enhance and improve business especially the fish business.
- ✓ They insisted the project should avoid employment discrimination, it should employ locals and a good contractor with enough resources should be engaged to ensure the project is done on time.
- ✓ They wanted to know when the project will start because it has gone through many processes and studies.

Role of Men as per the FGD

- ✓ The men are fishermen and pastoralists
- ✓ Men have more opportunities than women apart from education where they are disadvantaged.
- ✓ Men control livestock, land and settlement.
- ✓ The men feel safe in the community.
- ✓ The main challenges men face in the community include; lack of portable water, Drought leading to death of livestock, tides overturning boats and leading to death, scorpions and snake bites and high school drop outs to undertake fishing.
- ✓ sex, getting killed by the crocodiles and lack of toilets for fishermen.

Institutions/Community Development

- ✓ The main men traditional/cultural groups include Akiriket, Gakipeyos and Akilumlum.
- ✓ Top three community development priorities according to men; Borehole for portable water, electricity, improvement for fishing gears and market for fish.
- ✓ Main income generating activities in the area is fishing and Pastoralism.
- ✓ Men contribute more than women. They undertake fishing and keeping of livestock.
- ✓ There are no banks in the area and men utilize mobile and internet banking.

Land use

- ✓ No land based activities undertaken by men except pastoralism.
- ✓ No agriculture is practiced.
- ✓ Main animals kept in the community include goats, donkeys and camels.
- ✓ The men can move as far as 300km to Ethiopia and Uganda looking for pasture.
- ✓ Agricultural produce is bought at Nachukui and Lodwar.
- ✓ Land is communal and hence no land conflicts
- ✓ Men are involved in deep sea Fishing using locally made boats

Education, literacy, and training as per the FGD

- ✓ Existing schools include Nachukui primary
- ✓ Men and boys are now going to school due to the current government directive.
- ✓ Boys and men can generally read and write.

Health care analysis by the male FGD

- ✓ Nachukui Dispensary is the main dispensary in the area
- ✓ The main health problems by men include Malaria, Typhoid, HIV and Aids.

Access to Water analysis by the male FGD

- ✓ The Girls and women are responsible for searching water
- ✓ There is one borehole that was done in 2004 in the area.

Sanitation and hygiene according to Male FGD

- ✓ The area residents use pit latrines and open bushes as toilet facilities.

Access to Power

- ✓ Sources of energy in Nachukui
 - For lighting – Torch, firewood and D-Light
 - For warming they use firewood
 - Cooking -firewood
 - Charging mobile-solar
- ✓ There was no power supply in the area

Transport and communication

- ✓ The main forms of transport are motorbike use, walking and lifts from well-wishers.
- ✓ They have poor road network.
- ✓ Safaricom network is in the area.

Religious heritage

- ✓ The main festivals in the area are; Akuta(Marriage) and Asapan(Circumcision)
- ✓ The men indicated that they do not have any sacred/ historical religious site nearby.



Plate 10:Plate 9: Male FGD session

6.6.1.3 Youth Stakeholders' Consultation and Participation

- ✓ The youth participants were 28 in number comprising of 20 males and 8 females. The following opinions were provided by the youth participants during the FGD.

The project perception

- ✓ The youth disclosed that they had heard about the project in March 2021.
- ✓ They were optimistic that the project will create employment to the local youths, bring electricity and improve business.
- ✓ The youth wanted the project to have proper disposal for waste generated, adhere to Covid-19 regulations and having clear regulations that govern all the project phases.

- ✓ They wanted to know the project implementation timeline and also the cost that will be incurred for connectivity especially for the VMGs.
- ✓ The main Youth groups are Wimbi La Baraka and Savings and Credit.

Priorities

- ✓ The main youth's priorities include, construction of latrines, ECDEs piping and water
- ✓ The youths are involved in decision making.
- ✓ No programmes are in place to help the youth

Education, literacy, and training for youth FGD

- ✓ An estimate of 90% of the youth has completed secondary education while 30% have completed Vocational/College level education.
- ✓ The main youth skills include; plumbing, electrical connections and crafting.
- ✓ 1% of the youths are employed while 80% are in self-employment.
- ✓ The main jobs done by youths in the area include fishing, bodaboda and selling of clothes

6.7 GRIEVANCE REDRESS MECHANISM

6.7.1 Grievance Mechanism at Nachukui.

The project proponent has established project Local grievance redress committee (LGRC). The committee was reconstituted during the public meeting held at the Nachukui centre where the community members elected their representatives to the LGRC. The Nachukui LGRC is composed of 7 members including the following:

- ✓ 2 Female community representatives, elected by women, representing women and children related issues regarding the project.
- ✓ 1 Youth representatives, elected by youths, representing youths related concerns in the GRCs
- ✓ 2 Male representatives elected by the men of the Community-It includes the chief
- ✓ 1 PLWD representative
- ✓ Ward administrator

The roles of GRC include among others the following:

- ✓ Conducting extensive public awareness and consultations with the community
- ✓ Help ensure that local concerns raised by community members in regards to the project are promptly addressed by the proponent and the contractor.
- ✓ Resolve manageable disputes that may arise relating to the project. If it is unable to resolve/help refer such grievances to the proponent and the contractor.
- ✓ Ensure that the concerns of vulnerable persons such as the disabled, widowed women, orphaned children affected by the sub project are addressed.
- ✓ Assist the community in recording grievances, including helping those who cannot write or read.
- ✓ Help the vulnerable groups access project benefits
- ✓ Ensure that the community members are informed about the project

Community grievances are currently resolved at household levels. Households unable to resolve the grievance escalate the grievance to administrative/leadership levels. This is done through the chiefs/Ass. chiefs and community elders. Difficult grievances normally escalate to the police and a court of law

7.1 INTRODUCTION

This section provides an assessment of potential environmental and social impacts from the proposed Projects as well as the proposed mitigation measures to avoid, reduce, remediate or compensate for potential negative impacts and to enhance positive impacts. A description of the assessment methodology used to assess the significance of potential impacts, taking into account impact magnitude and sensitivity of receptors and resources affected, is provided below. All the mitigation measures identified in this chapter have been collated into the Environmental and Social Management Plan ('ESMP') matrix. This is including Occupational Health and Safety

7.2 Impact Assessment Methodology

An impact is essentially any change to a resource or receptor brought about by the presence of the Project component or by the execution of a Project related activity. In general, the assessment of impacts will proceed through an iterative process considering four key elements:

- Prediction of potential impacts and their magnitude (i.e., the consequences of the development on the natural and social environment);
- Evaluation of the importance (or significance) of potential impacts taking the sensitivity of the environmental resources or human receptors into account;
- Development of mitigation measures to avoid, reduce or manage the potential impacts or enhancement measures to increase positive impacts; and
- Assessment of residual significant impacts after the application of mitigation and enhancement measures.

Where significant residual impacts remain, further options for mitigation may be considered and impacts re-assessed until they are as low as reasonably practicable for the Project and would be deemed to be within acceptable levels:

7.3 Defining Impact

Impacts will be defined in a number of ways, including:

- Nature of impact: positive or negative;
- Type of impact: direct, indirect, or cumulative;
- Duration of impact: temporary, short-term, national, international
- Scale of impact: onsite, local, regional, national, international.

7.4 ASSESSMENT OF SIGNIFICANCE

Criteria for assessing the significance of impacts will stem from the following key elements:

- Status of compliance with relevant Kenyan legislation, policies and plans and any relevant Kenyan or industry policies, standards or guidelines, as well as international best practice standards and guidelines;
- The magnitude (including nature, scale and duration) of the change to the natural or socioeconomic environment (e.g. an increase in coastal erosion, or an increase in employment opportunities), expressed, wherever practicable, in quantitative terms. The magnitude of all impacts is viewed from the perspective of those affected by considering the likely perceived importance as understood through stakeholder engagement;
- The nature and sensitivity of the impact receptor (physical, biological, or human). Where the receptor is physical, the assessment considers the quality, sensitivity to

change and importance of the receptor. For a human receptor, the sensitivity of the household, community or wider societal group is considered along with their ability to adapt to and manage the effects of the impact; and

- The likelihood (probability) that the identified impact will occur. This is estimated based upon experience or evidence that such an outcome has previously occurred.

It is generally accepted that significance is a function of the magnitude of the impact and the likelihood of the impact occurring.

For this assessment, significance has been defined based on five levels described in table below;

Table 15: Categories of Significance

Category	Significance
Positive impacts	Positive impacts provide resources or receptors, most often people, with positive benefits. It is noted that concepts of equity need to be considered in assessing the overall positive nature of some impacts such as economic benefits, or opportunities for employment
Negligible impacts (or Insignificant impacts)	Negligible impacts (or Insignificant impacts) are where a resource or receptor (including people) will not be affected in any way by a particular activity or the predicted effect is deemed to be 'negligible' or 'imperceptible' or is indistinguishable from natural background variations.
Minor	An impact of minor significance ('Minor impact') is one where an effect will be experienced, but the impact magnitude is sufficiently small (with or without mitigation) and well within accepted standards, and/or the receptor is of low sensitivity/value.
Moderate	An impact of moderate significance ('Moderate impact') is one within accepted limits and standards. Moderate impacts may cover a broad range, from a threshold below which the impact is minor, up to a level that might be just short of breaching a legal limit. Clearly to design an activity so that its effects only just avoid breaking a law and/or cause a major impact is not best practice. The emphasis for moderate impacts is therefore on demonstrating that the impact has been reduced to a level that is ALARP (as-low-as-reasonably-possible). This does not necessarily mean that 'Moderate' impacts have to be reduced to 'Minor' impacts, but that moderate impacts are being managed effectively and efficiently.
Major	An impact of major significance ('Major impact') is one where an accepted limit or standard may be exceeded, or large magnitude impacts occur to highly valued/sensitive resource/receptors. An aim of EIA is to get to a position where the Project does not have any major residual impacts, certainly not ones that would endure into the long-term or extend over a large area. However, for some aspects there may be major residual impacts after all practicable mitigation options have been exhausted (i.e. ALARP has been applied). It is then the function of regulators and stakeholders to weigh such negative factors against the positive ones in coming to a decision on the Project.

For environmental impacts the significance criteria used in this ESIA is shown in **Error!**
Reference source not found..

Table 16: Overall Significance Criteria for Environmental Impacts

Receptor sensitivity (or resource value)	Impact Magnitude		
	Low	Medium	High
Low	Minor	Minor	Medium
Medium	Minor	Medium	Major
High	Medium	Major	Major

For the social impact assessment, the perceptions of stakeholders, expressed as opinions around certain issues, can be as important as actual impacts. Consequently, the concept of perception is explicitly brought into the evaluation of significance after an impact is evaluated. When an impact is of significant stakeholder concern, this may be causing to raise the significance rating. This prompts the formulation of more rigorous and appropriate mitigation measures which focus on the source of the impact and also address stakeholder perceptions. The risk of not addressing stakeholder perceptions is that reputational damage could arise, resulting in the loss of a 'social licence to operate'.

7.5 Magnitude of Impact

The impact assessment describes what will happen by predicting the magnitude of impacts and quantifying these to the extent practical. The term 'magnitude' covers all the dimensions of the predicted impact to the natural and social environment including:

- the nature of the change (what resource or receptor is affected and how);
- the spatial extent of the area impacted, or proportion of the population or community affected;
- its temporal extent (i.e., duration, frequency, reversibility); and
- where relevant (accidental or unplanned events), the probability of the impact occurring.

For biophysical impacts, the definitions for the spatial and temporal dimension of the magnitude of impacts used in this assessment are provided in **Error! Reference source not found.**

For social impacts, the magnitude considers the perspective of those affected by taking into account the likely perceived importance of the impact, the ability of people to manage and adapt to change and the extent to which a human receptor gains or loses access to, or control over, socio-economic resources resulting in a positive or negative effect on their well-being (a concept combining an individual's health, prosperity, their quality of life, and their satisfaction).

Table 19 below (under Likelihood) provides an account of the key features (definitions) of each of the impact significance classifications (from Not Significant to High); specifically linking them to the need for mitigation measures.

7.6 Sensitivity of Resources and Receptors

Sensitivities are defined as aspects of the natural or social environment which support and sustain people and nature. Once affected, their disruption could lead to a disturbance of the stability or the integrity of that environment. For ecological impacts, sensitivity can be assigned as low, medium or high based on the conservation importance of habitats and species. For habitats, these are based on naturalness, extent, rarity, fragility, diversity and importance as a community resource.

For socio-economic impacts, the degree of sensitivity of a receptor is defined as 'a stakeholder's (or groups of stakeholders') resilience or capacity to cope with sudden changes or economic shocks. The sensitivity of a resource is based on its quality and value/importance, for example, by its local, regional, national or international designation, its importance to the local or wider community, or its economic value.

7.7 Likelihood

Terms used to define likelihood of occurrence of an impact are explained in Table 17;

Table 17: Explanation of Terms Used for Likelihood of Occurrence

An impact with a		
High probability	Refers to a very likely impact	Refers to very frequent impacts
Medium probability	Refers to a likely impact	Refers to occasional impacts
Low probability	Refers to rare impacts	Refers to rare impacts
	As far as one-time events (e.g. air emissions) or slowly developing effects are concerned (e.g. impacts on local life style)	As far as possibly recurring impacts are concerned, such as accident or unplanned events (e.g. traffic accident, fire)

7.8 Definition of mitigation measures

Mitigation measures are developed to avoid, reduce, remedy or compensate for significant potential negative impacts, and to create or enhance potential positive impacts, such as environmental and social benefits. In this context, the term "mitigation measures" includes operational controls as well as management actions. These measures are often established through industry standards and may include:

- Changes to the design of the project during the design process (e.g., changing the development approach);
- Engineering controls and other physical measures applied (e.g., waste water treatment facilities);
- Operational plans and procedures (e.g., waste management plans); and
- The provision of like-for-like replacement, restoration or compensation.

For potential impacts that are assessed to be of major significance, a change in design is sometimes required to avoid or reduce the significance. For potential impacts assessed to be of moderate significance, specific mitigation measures such as engineering controls are often sufficient to reduce these impacts to ALARP ('as-low-as-reasonably-possible') levels. This approach takes into account the technical and financial feasibility of mitigation measures. Potential impacts assessed to be of minor significance are usually sufficiently managed through good industry practice, operational plans and procedures.

In developing mitigation measures, the first focus is on measures that will prevent or minimise potential impacts through the design and management of the Project rather than on reinstatement and compensation measures.

7.9 Assessing residual impacts

Impact prediction takes into account any mitigation, control and operational management measures that are part of the project design and project plan. A residual impact is the impact that is predicted to remain once mitigation measures have been designed into the intended activity. The residual impacts are described in terms of their significance in accordance with the categories identified in **Error! Reference source not found.** above

Social, economic and biophysical impacts are inherently and inextricably interconnected. Change in any of these domains will lead to changes in the other domains.

7.10 POSITIVE IMPACTS DURING CONSTRUCTION PHASE

This section enumerates and discusses the positive impacts associated with the proposed project during construction phase of the project.

7.10.1 Creation of Employment Opportunities

Various employment opportunities will be available during construction. The opportunities will be both skilled and unskilled. Majority of the unskilled and semi-skilled jobs will be taken up by the local community. Employment of the locals will increase skill transfer from the contractors. The approximate number of workers to be employed by the proposed project is not yet known, however, this will contribute to easing unemployment level in the area. There will be a trickledown effect to the economy at large resulting from new income revenues as well as services provided through this project.

The impact significance is low as it will employ few people over a short period

Mitigation

- Contractor should ensure that they prioritise the local community in allocating job opportunities.
- Contractor should ensure that job opportunities are not discriminatory
- Equal opportunities should be given to both men and women

7.10.2 Improving local economy

During this phase, the project will require supply of building materials most of which will be sourced locally at the nearest trading centre and its environs to the extent possible. Therefore, the project will provide ready market for local enterprises with such materials and boosts the local economy.

The businesses that will benefit during this phase are such as hotel, shops, artisan industries and food vending who will be benefit directly from the construction, as people working there will need commodities from them. This will promote the informal sector in securing some temporary revenues and hence improved livelihoods. One of the responsibilities of the beneficiaries of the proposed Solar Mini-grid is to undertake wiring of their premises before there are connected and payment of a connection fee of Ksh 1000. The MOE through its implementing agency KPLC should consider supporting at least 50 households that are very poor through installation of ready boards to offset the cost of wiring so that they can also access electricity. The impact significance is low as it will buy few materials over a short period of time

- KPLC should ensure that their contractors/suppliers remit taxes and have a tax compliance certificate
- Prioritise local purchases over imports.
- Remit taxes on behalf of employees
- Contractor should prioritise local purchases over imports;
- Contractor should give preference to local labour which increases the local's ability to spend

7.11 POSITIVE IMPACTS DURING OPERATION PHASE

7.11.1 Quality, Reliable Power Supply

There is no electricity in Nachukui. This is a maiden project with an aim of supplying power through solar because the area is far away from the national power grid. Once operational, household and public institutions (dispensary, primary school) and shopping centre in the area will greatly benefit from the stable power supply.

The impact significance is high as it will provide power where it wasn't for a long period

Enhancement measures

- KPLC should ensure that they have a functional customer support team and a field response team;
- KPLC should ensure that they communicate power outages early to consumers

7.11.2 Employment Creation

Employment opportunities will also be created during the operation phase of the project. Opportunities that will be created include unskilled, semi-skilled to skilled jobs. These will involve security personnel, and staff to operate and maintain the Mini-grid. Employment will increase skill transfers. The impact significance is low as it will employ people to manage the substation

Enhancement measures

- KPLC should ensure that they prioritise the local community in allocating job opportunities.
- KPLC should ensure that job opportunities are not discriminatory
- Equal opportunities should be given to both men and women

7.11.3 Reduction of Pollution Associated with Thermal Power Generation, Kerosene and Wood Fuel Usage:

Residents in the area use different sources of energy. Electricity supply will imply that as many as are willing can apply for connection and get connected. This will result in reduced individuals and organizations using diesel generators, less reliance on kerosene, wood fuel and charcoal. This would mean less carbon dioxide is released to the environment and destruction of forests will be reduced hence decreasing greenhouse gases.

The impact significance is high as it will provide cleaner energy over a long period of time for many households

Enhancement measures

- KPLC should ensure that the power provided cost is competitive to discourage the locals from using unclean source of power.
- KPLC should ensure that they communicate power outages early to consumers

7.11.4 Improvement of Local and National Economy

The mini-grid project will ensure supply of a stable power that will reduce damage to the electronics and this will result in promotion of businesses both in the formal and informal sectors. Availability of power will enable businessmen to scale up their businesses while making it possible to set up businesses such as salons, barber shops, photocopying machines, cyber cafes, welding, refrigeration of drinks among others. This will result in income improvements at the individual level and for the national economy. More customers will be connected and retail of reliable electricity by the power utility firm will attract increased tax revenues to the government.

The impact significance is low as it will buy few materials over a long period of time

Enhancement measures

- KPLC should ensure that their contractors/suppliers remit taxes and have a tax compliance certificate
- Prioritise local purchases over imports.
- Remit taxes on behalf of employees

7.11.5 Education

Access to electricity at the household level and schools will create opportunities for children be able to study even for longer hours. Additionally, children in households can also access education programs being aired through different radio and T.V. channels. Schools will be able to take advantage of information technology and communication that are becoming a way of life in education sector and learning in general.'

The impact significance is high as it will provide power to schools over a long period for additional study time in the night and morning

Enhancement measures

- KPLC should consider having the transmission lines are closer to schools for them to benefit from the power supply;
- KPLC should consider partnering with the county government in providing street lighting to improve security for children and teachers leaving for school early or leaving late for home

7.11.6 Health Benefits of the Project

Solar energy for lighting is better than kerosene lamps that are in use currently. This is because kerosene lamps emit particles that cause air pollution. The health risks posed by this indoor air pollution mainly include acute lower respiratory infections. Additionally, insufficient illumination (low light) conditions can cause some degree of eye strain and reading in these conditions over long periods of time may have the potential to increase the development of near-sightedness in children and adults. The project will result in many families replacing kerosene lamps for lighting with electricity there-by reducing chances of the afore mentioned disease incidences.

7.11.7 Improved Standard of Living

Availability of power will result in lifestyle changes through improved night lighting, pumping of water instead of manual pumping and refrigeration to maintain food safety and quality.

7.11.8 Security

The area will benefit from improved security since houses, businesses and public institutions will be well lit using electricity. This is as a result of more security flood lights bulbs which helps keep off opportunistic crimes including gender-based violence.

7.11.9 Communications

Access to electricity will lead to improved communication. This will be enabled by the fact that charging of mobile phones will be easier and cheaper. Access to mass media like radio and T.V will provide opportunity for the households to access a wide range of information which is useful for decision making.

7.12 POSITIVE IMPACTS DURING DECOMMISSIONING PHASE

7.12.1 Employment Opportunities

Once the project has served its purpose it will then be decommissioned. This will involve demolition and removal of the facility. During demolition, unskilled, semi-skilled and skilled employment opportunities will be available to the public.

7.12.2 Site Rehabilitation

After demolition of the proposed project, rehabilitation of the project site will be carried out to restore it to its original status or to a better state than it was. This will include replacement of topsoil and re-vegetation which will lead to restoration of the visual, vegetative and aesthetic state of the site.

7.13 NEGATIVE IMPACTS DURING PRE-CONSTRUCTION PHASE

7.13.1 Land Take

The identified site for the proposed Mini-grid will take 1.252 hectares of land owned by the Nachukui community that they set aside by the community for construction of public facilities. The assessment found that;

- No residential houses or businesses premises were on the piece of land
- No socio-economic activity was taking place on the land
- No physical relocation will take place.

Way Leaves

Supply of electricity will involve passing of low voltage (LV) lines to connect the customers to power. It is estimated that a total of 9.65km of LV circuit will be constructed mainly along the road reserve and along the boundaries to supply power.

The impact significance for this impact is assessed minor considering the community wilfully allocated the land for project construction.

Mitigation Measures

- Land for mini-grids will be acquired by NLC compulsorily and affected communities compensated in-kind.

- The contractor will sign and adhere to the agreement for use of community land for contractor facilities and worker's camps, and restoration of the site after use.
- The construction activities will be restricted to within the allocated land and the immediate surroundings only.
- After construction work, any land taken for a temporary basis for storage of material will be restored to their original form.
- Consultations with the community during construction of the low voltage lines

7.14 KEY ENVIRONMENTAL IMPACTS – CONSTRUCTION PHASE

7.14.1 Land take

The study area consists of communal land. Considering the land use of Nachukui area, the distribution line will be located on unregistered community land. The community has since offered to the land in kind for project use. The establishment of the mini-grid will convert communal land to industrial use for long term.

For the purpose of assessment of impacts on land use of the area, the following project activities leading to an alteration in land use of the area during construction phase have been considered:

- Installation of PV modules;
- Establishment and operation of temporary structures such as temporary site office and store yard.

The land use receptor sensitivity criteria will be low. This is due to the fact that there will be visual change upon installation of the minigrid. There is no major dependency for grazing or agriculture on the land offered for the project. The magnitude criteria of this impact will be medium because there will be noticeable of change over the restricted site area. The change may be medium to long term and is reversible.

7.14.2 Embedded/In-built Control

- The construction activities will be restricted to within the allocated land and the immediate surroundings only.
- After construction work, any land taken for a temporary basis for storage of material will be restored to their original form.
- The existing earth roads at Nachukui will be used for access to the project site.

7.14.2.1 Significance of Impact

The overall impact significance on land use will be Moderate. This is the case due to the fact that the receptor sensitivity is medium and the impact magnitude is medium.

7.14.2.2 Additional Mitigation Measures

- On completion of construction activities, land used for temporary facilities such as store yard should be restored to the extent possible;
- The land use in and around permanent project facilities should not be disturbed.
- Construction activities should be restricted to the designated area.

7.14.3 Impact on Topography

The topography of the project area is arid landscape and the terrain at the project site is flat. There are no water bodies that pass through directly the proposed project site. Typically, solar power projects do not undertake levelling of topography and since the proposed project, along

with the access road, is mostly on a flat terrain the receptor sensitivity has been assessed to be low.

Due to undulating topography, study area may exhibit presence of micro drainage channels. Therefore, the impact magnitude has therefore been assessed as minor.

7.14.3.1 Embedded/In built Control

The contractor will be instructed to avoid any unnecessary changes in the topography.

7.14.3.2 Significance of Impact

The overall impact significance will be Minor. This because the impact magnitude is low and there will be no major changes to the topography and the receptor sensitivity is low.

7.14.3.3 Additional Mitigation Measures

- Appropriate number of cross drainage channels should be provided during construction to maintain flow in existing natural channels.
- Disruption/alteration of micro-watershed drainage pattern should be minimized to the extent possible.

7.14.4 Impact on Soil Environment

7.14.4.1 Project Phases and Associated Activities

For impact assessment, the following phases of the project cycles were considered for potential impacts on the soil environment. The phase wise project activities that may impact the environment are described below.

Construction Phase

- Vegetation clearance and top soil removal;
- Storage of oil and lubricants onsite;
- Storage of construction materials; and
- Disposal of different type of waste generated from the temporary project site.

Operation and Maintenance Phase

- Storage of oil and lubricants onsite;
- Disposal of municipal solid waste and waste water from site office; and
- Storage of waste materials onsite.

Decommissioning Phase

- Removal of PV modules;
- Removal of associated infrastructure including battery and generators.

7.14.4.2 Significance of Impacts

The significance of the impact to the soil will be minor due to the nature of the works and the fact that construction and operational activities will be confined in the small project area.

7.14.4.3 Additional Mitigations

- Vehicles will utilize the existing roads to access the site;
- No unauthorized dumping of used oil and other hazardous waste should be undertaken at site;
- All waste should be stored in a shed that is protected from the elements (wind, rain, storms, etc.) and away from natural drainage channels;
- Solid waste should be Segregated in color coded waste receptacles.
- In case of accidental/unintended spillage on small area, the contaminated soil should be immediately collected and stored as hazardous waste;
- Compacting of loose soil in excavated areas.

- Enclose the construction site and protect the soil to prevent the waste soils and other debris from being washed away by surface runoff and wind.
- All dug up soil that is not needed on-site to be removed promptly and disposed of to appropriate areas.
- Re-use the dug up soil in backfilling and landscaping.
- Any soil potentially contaminated by chemicals, oils, fuels to be collected and disposed of by a NEMA authorized waste

7.14.5 Impact on Air Quality

The assessment with respect to air quality of the study area has been done for the following project activities:

- Fugitive emissions from site clearing, excavation work, material handling etc.;
- Fugitive emission from traffic movement;
- Exhaust emission from operation of machineries like pile drivers, vehicles; and
- Point source emission from diesel generator.

7.14.5.1 Embedded/in-built control

Vehicle engines need to be properly maintained to ensure minimization in vehicular emissions.

7.14.5.2 Significance of Impact

There are few Receptors (settlements) within 500 m of the project site at the Nachukui centre and the impact magnitude will be moderate and sensitivity medium hence the impact significance will be moderate.

Sensitive receptors of air and emissions were identified by observation during field visit to project site. They were noted to be mainly residential and commercial in nature. The distances from a source that dust impacts can occur is highly site specific and will depend on the extent and nature of incorporated mitigation measures, prevailing wind conditions, rainfall and the presence of natural screening. Due to the variability of the weather, it is impossible to predict what the weather conditions will be when specific construction activities are being undertaken. Therefore, the assessment of construction dust impacts is typically qualitative.

7.14.5.3 Additional Mitigation Measures

- Spraying water on soil before excavation and periodic access road wetting to reduce nuisance dust levels.
- Visual inspection of dust pollution from roads and the construction site and appropriate intervention if dust levels are high.
- Speed restriction of construction vehicles to a speed of 10-15km/h or less on the site and on the access roads to the site.
- Maintenance and servicing of machines and engines off-site.
- Grievance procedure for dust complaints.
- The use of appropriate Personal Protective Equipment (PPE) such as dust masks, in particular, for construction workers.
- All construction materials will be transported in designated trucks which will be covered.

7.14.6 Impact on Ambient Noise

As most of the noise generating activities will be performed within the site area, construction activities will likely have a small to insignificant incremental impact on the existing noise levels. The sources of noise in the construction phase include construction activities, operation of

generator sets and movement of vehicles. There will also be increased noise levels because of increased anthropogenic movement in the area.

The main receptor will be the Nachukui Primary school and Nachukui centre which is within 500m from the site that also hosts residents. The receptor sensitivity is therefore considered as medium. Impact magnitude is considered to be minor to medium considering the construction period of the project that will last for not more than 12 months and proximity to Nachukui centre.

7.14.7 Assessment Criteria for Impact on Ambient Noise

The assessment with respect to ambient noise quality of the study area has been done for the following project activities:

Construction activities including site preparation, piling work, construction of ancillary facilities;

Transportation of construction materials, machinery and personnel;

Operation of generator sets; and

Demolition activities during decommissioning phase.

The ambient noise levels have been assessed with respect to Noise Pollution (Regulation and

Control) Rules, 2000 and WHO Guidelines as shown in Table 41 and Table 42 respectively.

7.14.7.1 Embedded/in-built control

Normal working hours of the contractor to be defined (preferable 0800hrs to 1700hrs). If work needs to be undertaken outside these hours, it should be limited to activities which do not generate noise.

7.14.7.2 Significance of Impact

The impact significance has therefore been assessed moderate. This due to the fact that the impact magnitude is low and the receptor sensitivity is medium. The site is on very close proximity to Nachukui Centre and few residential houses nearby.

7.14.7.3 Additional Mitigation Measures

- Only well-maintained equipment should be operated on-site;
- If it is noticed that any particular equipment is generating too much noise then lubricating moving parts, tightening loose parts and replacing worn out components should be carried out to bring down the noise and placing such machinery far away from the households as possible;
- Machinery and construction equipment that may be in intermittent use should be shut down or throttled down during non-work periods; and
- Minimal use of vehicle horns and heavy engine braking in the area needs to be encouraged.
- Construction machineries should be maintained regularly to reduce noise resulting from friction;
- Normal working hours of the contractor to be defined (preferable 8 am to 5pm). If work needs to be undertaken outside these hours, it should be limited to activities which do not generate noise;
- Sensitize construction truck drivers to switch off vehicle engines while offloading materials.

7.14.8 Visual Intrusions and Changes in Landscape Impact

The project site is located on a terrain that is flat. There will be no significant change to visual quality of the area resulting from development or change in land use that will alter the

landscape. Changes in the visual landscape will range from construction phase to commissioning of the minigrad and associated structures and further during operations. This Project is the first major solar power Project in the vicinity of project area and the new development will have impact on the surrounding area.

The project area is primarily a rural area and with fishing as a primary activity. Although the solar panels, inverter, Transformers and associated components would be manufactured off site and the construction phase would be relatively short-term in duration (less than one year), it would still require large number of equipment or infrastructure when being erected such as dumpers and transportation vehicles on site. Additionally, the presence of bare soil along the access roads would increase the potential visual impact. The significance of the visual impacts will reduce at increasing distance from the development.

The construction of the mini-grid sites may involve the site clearance of vegetation (minimal vegetation at the site) and other natural attributes. The erection of the solar PV panels and the resulting glare from the sun will make it a standout feature from the natural surroundings and this would lower the visual appeal of the area.

Even though the Mini grid facilities will be small, their geometric and sometimes highly reflective surfaces may have visual impacts. However, being visible is not necessarily the same as being intrusive. Aesthetic issues are by their nature highly subjective.

7.14.8.1 Embedded/In-built Control

Proper siting decisions can help to avoid aesthetic impacts to the landscape. The project site is located in open area with minimal settlement.

7.14.8.2 Significance of Impact

Construction activities will mainly be inside the site footprint and will have moderate impact on the present visual environment. The sensitive receptors include the Nachukui primary school, nachukui centre and the residents near the site. The impact magnitude will however be low hence the visual change during construction phase will be assessed as minor.

7.14.8.3 Additional Mitigation Measures

The following mitigation measures will have to be implemented to minimise potential visual impacts during the construction phase:

- The extent of the labour camp and storage area should be limited in area to only that which is essential;
- Minimize presence of ancillary structures on the site and minimize roads disturbance;
- Upon completion of construction work, areas utilized for labour camp, storage area to be restored to original form.

7.14.8.4 Impacts on Waste Generation and Soil Contamination

General construction waste generated onsite will comprise of concrete, steel cuttings/filings, packaging paper or plastic etc. solid wastes consisting of food waste, plastic, glass and waste paper will also be generated by the construction workforce. A small proportion of the waste generated during construction phase will be hazardous and will include waste fuel, grease and waste oil containing rags. Used transformer oil which is also categorized as hazardous waste

will be generated from the plant. If improperly managed, solid waste could create impacts on soil quality. Therefore, the receptor sensitivity has been assessed as medium.

The impact magnitude has been assessed as low since the proponent has managed other solar power projects as well and has effective management systems for waste and hazardous substances being generated or utilized during the project life cycle as part of their Environmental and Social Management Framework.

7.14.8.4.1 Embedded/in-built control

Hazardous material and waste should be properly labelled, stored onsite at a location provided with impervious surface and in a secondary containment system.

7.14.8.4.2 Significance of Impact

The impact significance for waste generation and soil contamination has been assessed as minor. Given the low sensitivity of the surrounding areas and the medium magnitude of the potential consequences of soil contamination, the potential impact significance is rated as minor.

7.14.8.4.3 Additional Mitigation Measures

- Contractor should ensure that no unauthorized dumping of used oil and other hazardous waste is undertaken at the site;
- Designated areas should be provided for Solid Waste and daily collection and period disposal should be ensured;
- Construction and Demolition Waste should be stored separately and be periodically collected by an authorized treatment and storage facility;
- All waste should be stored in a shed that is protected from the elements (wind, rain, storms, etc.) and away from natural drainage channels;
- A log book should be maintained for quantity and type of hazardous waste generated; and
- In case of accidental/unintended spillage, the contaminated soil should be immediately collected and stored as hazardous waste.

7.14.9 Vegetation Clearance

The construction process of the proposed Mini-grid and other associated facilities and structures will involve clearing of the existing limited vegetation cover (mainly grass) and trees. The project site is located in open area with minimal settlement around the Nachukui Market and the primary school. Both the magnitude and sensitivity of this impact will be low. The impact will be direct, permanent and minor.

7.14.9.1 Embedded/In-built Control

- The construction activities will be restricted to within the allocated land and the immediate surroundings only.
- After construction work, any land taken for a temporary basis for storage of material will be restored to their original form.
- The existing earth roads at Nachukui will be used for access to the project site.

7.14.9.2 Significance of Impact

The overall impact significance on vegetation clearance will be low. This is the case due to the fact that the receptor sensitivity is medium and the impact magnitude is low.

7.14.9.3 Additional Mitigation Measures

1. Clear only the necessary areas
2. Ensure proper demarcation and delineation of the project area to be affected by construction works.
3. Specify locations for vehicles and equipment, and areas of the site which should be kept free of traffic, equipment, and storage.
4. Designate access routes and parking areas
5. Re-vegetation including planting of trees around the plant/facility

7.14.10 Soil Erosion Impact

During clearing of the area to pave way for groundbreaking soil erosion may take place. This will be due to surface run off or blowing away by the wind if not properly managed. This is bound to happen because the soil will be loose. The area is gently slopy on the lower side and surface run off can also result to soil erosion. The impact significance will be minor due to the nature of the works and the fact that construction activities will be confined in the small project area.

7.14.10.1 Embedded/in-built control

The contractor shall avoid groundbreaking during the seasons of high rainfall to avoid erosion.

7.14.10.2 Significance of Impacts

The significance of the impact to the soil will be minor due to the nature of the works and the fact that construction and operational activities will be confined in the small project area.

7.14.10.3 Additional mitigative measures

- Monitoring of areas of exposed soil during rainy seasons to ensure that any incidents of erosion are quickly controlled.
- The contractor should ensure that construction related impacts like erosion and cut slope destabilizing should be addressed through landscaping and grassing, carting away and proper disposal of construction materials
- Use silt traps where necessary
- Cover soil stockpiles.
- Landscaping with grass on areas without electrical installation (lower areas)
- The contractor should ensure recovery of exposed soils with grass and other ground cover as soon as possible.
- The contractor should put up proper drainage to avoid unnecessary erosion and do compaction of spoil areas to avoid land instability in form of soil subsidence, slip and mass movement.
- Areas compacted by vehicles during site preparation and construction should be scarified (ripped) by the contractor in order to allow penetration of plant roots and the re growth of the natural vegetation

7.14.11 Pollution from Solid Waste Generation

It is expected that solid waste will be generated during construction phase of the project. Solid waste is anticipated to be produced during site preparation, civil works, spoil from excavations and will include; mortar, wood, paper, waste paper wrappings, conductor off cuts, masonry chips and left-over food stuffs. Effects of mismanaged waste include:

- Public nuisance due to littering or smell in case of rotting
- Contamination of soils and water courses
- Creation of breeding grounds for vermin like rodents and cockroaches

7.14.11.1 Embedded/in-built control

Segregate waste and dispose of appropriately using a licensed waste handler.

7.14.11.2 Significance of Impacts

The significance of this impact will be minor due to the nature of the works and the fact that construction activities will be confined in the small project area.

7.14.11.3 Additional Mitigative measures

- Ensure spoil from excavations is arranged according to the various soil layers. This soil can then be returned during landscaping and then rehabilitation, in the correct order which they were removed that is top soil last;
- Provide litter collection facilities such as bins and create awareness campaigns to segregate as early as possible, using the appropriate bins
- Contractor to put in place and comply with a site waste management plan
- The contractor should comply with the requirement of OSHA ACT 2007 and Building rules on storage of construction materials
- Use of durable, long-lasting materials that will not need to be replaced as often, thereby reducing the amount of waste generated over time
- Recovery of materials remains and return to stores
- Re-use of materials where possible
- Proper budgeting to avoid waste generation

7.14.12 Noise and vibration

During construction activities noise pollution will occur and is bound to be a nuisance and a disturbance to neighboring communities. This noise is from construction equipment, excavation works, concrete mixing and vehicles coming to site but will be temporary. From the prediction of the specialist study on ambient noise quality measurements, the traffic noise that will be emitted by traffic accessing the proposed project site during construction is expected to have an adverse impact on ambient noise. The level of traffic noise will increase depending on the traffic volume. General guideline indicates that an increase of 20% in traffic volume approximates to a noise level increase of around 1 dB, while a doubling of traffic volume results in a noise level increase of about 3 dB. It is however, worth noting that the level of noise is attenuated with increase in distance from the source and thus the sites/objects in close proximity to the source will receive more noise in comparison to those at remote location. The impact significance has therefore been assessed minor.

7.14.12.1 Embedded/in-built control

Limit vehicles to minimum idling time and observe a common-sense approach to vehicle use, and encourage drivers to switch off vehicle engines whenever possible.

7.14.12.2 Significance of Impacts

This due to the fact that the impact magnitude is low and the receptor sensitivity is medium. The site is on very close proximity to Nachukui primary and the nearby market center with some residential houses.

7.14.12.3 Additional Mitigative measures

These proposed mitigation measures aim to ensure that noise generated during construction is kept to minimum and adheres to relevant noise standards. They include:

- Fencing off the construction site with iron sheet during construction
- Install portable barriers to shield compactors thereby reducing noise levels.
- Use of noise-suppression techniques to minimize the impact of construction noise at the project site.
- Use equipment designed with noise control elements.
- Co-ordinate with relevant agencies regarding all construction activities.
- Set and observe speed limits and avoid raving of engines
- The Contractor shall ensure that construction activities are limited to working hours (i.e., between 8am and 5pm daily) from Monday to Saturday, or as required in terms of legislation.
- Compliance with Noise and Vibration Regulations of 2009 is expected

7.14.13 Impacts from Hazardous Materials

Some hazardous materials will be used during construction phase of the project. They include insulating oil, paints, solvents and oils. Spilled chemicals can contaminate soil as well as pollute water resources. Additionally, hazardous and flammable substances if improperly stored and handled on site become potential health hazard for construction workers and the public. The amount of hazardous waste generated will be minimal. The significance of the impact will be minor due to a low magnitude and medium sensitivity.

7.14.13.1 Embedded/in-built control

Material handling to be done by trained and qualified staff.

7.14.13.2 Significance of Impacts

This due to the fact that the impact magnitude is low and the receptor sensitivity is medium. The site is on very close proximity to Nachukui primary and the nearby market center with some residential houses.

7.14.13.3 Additional Mitigative measures

- Maintenance of construction vehicles will not be done on site
- All hazardous products and waste should be labelled and handled properly to avoid contact with the ground
- The contractor site should have designated area (concrete bunded) for storing hazards materials

7.14.14 Fire Hazards

During construction of the project, fire hazards are likely to occur especially when precaution measures are not taken to account. Smoking is one of causes of fires and this can happen if

cigarette butts are left carelessly. Additionally, keeping of fuels onsite during construction can be a potential cause of fire.

7.14.14.1 Embedded/in-built control

Provision of firefighting equipment (extinguishers) on site during construction..

7.14.14.2 Significance of Impacts

This impact is evaluated to be of moderate significance. All the construction activities will be confined at the project site hence high sensitivity and low magnitude.

7.14.14.3 Additional Mitigative measures

The following measures should be put in place to prevent fire hazards:

- Create awareness to the construction workers on potential fire hazards
- No smoking shall be done on construction site
- 'No smoking' signs shall be posted at the construction site
- A fire evacuation plan must be posted in various points of the construction site including procedures to take when a fire is reported.

7.14.15 Impacts of construction material sourcing (e.g., quarrying)

The construction of the project will utilize materials such as; stone, ballast, sand and hardcore. It is anticipated that they will be obtained from quarry and mining operations. Conscious or unwitting purchase of these materials from unlicensed operations indirectly supports, encourages and promotes environmental degradation at the illegal quarry sites and causes medium to long term negative impacts at source, including landslides.

7.14.15.1 Embedded/in-built control

Reuse of construction materials where possible

7.14.15.2 Significance of Impacts

The significance of this impact will be moderate due to high sensitivity and low magnitude..

7.14.15.3 Additional Mitigative measures

- The contractor should source all building materials such as stone, sand, ballast and hard core from NEMA approved sites.
- Ensure accurate budgeting and estimation of actual construction materials to avoid wastage.

7.14.16 Increased Water Demand

During the construction of the project there will be increased demand for water by the construction workers and the construction works. Water will be mostly used in the construction works and for wetting surfaces or cleaning completed structures. It will also be used by the construction workers to wash themselves and even drink. Although the sensitivity of the receptor (surface water) in the project area is high owing to unavailability of feasible alternative source of water for the local community, the overall significance of impacts is assessed to be negligible due to negligible magnitude of the impact.

7.14.16.1 Embedded/in-built control

Prudent use of available water

7.14.16.2 Significance of Impacts

The overall significance of impacts is assessed to be negligible due to negligible magnitude of the impact.

7.14.16.1 Additional Mitigative measures

- Consultations with the project local committee on use of water in the community to avoid conflicts with the community
- Contractor to make own arrangements to provide water for construction works different from the community dam to avoid any conflicts with community.

7.14.17 Energy Consumption

The construction works will consume fossil fuels (mainly diesel) to run transport vehicles and construction machinery. Fossil energy is non-renewable and its excessive use may have serious environmental implications on its availability, price and sustainability.

7.14.17.1 Embedded/in-built control

Regular maintenance of vehicles to ensure efficient consumption of fuels

7.14.17.2 Significance of Impacts

This impact will be negligible owing to the size of the project that will require very few trucks during the construction phase

7.14.17.3 Additional Mitigative measures

Proper planning of transportation of materials will ensure that fossil fuels (diesel, petrol) are not consumed in excessive amounts. Complementary to these measures, the contractor shall monitor energy use during construction and set targets for reduction of energy use.

7.14.18 Occupational Health and Safety Impacts

There are several activities involved during construction. These activities can pose potential health and safety risks to the workers. The activities include excavation, backfilling, civil works, pole erection, stringing of conductors. Risk of accidents and incidents are likely during construction activities. As already noted during construction, the safety and health of employees may be exposed to risk as a result of the use of tools and other machinery to construct the Mini-grid. Occupation safety and health risks includes accidents, fall from heights, pricks by sharp objects etc. The impact on occupational health and safety during the construction phase is evaluated to be of moderate significance. All the construction activities will be confined at the project site hence high sensitivity and low magnitude.

7.14.18.1 Embedded/in-built control

The contractor will use skilled personnel for activities

7.14.18.2 Significance of Impacts

The impact significance has therefore been assessed moderate. This due to the fact that the impact magnitude is low and the receptor sensitivity is medium. The project will have employees working on site hence the sensitivity.

7.14.18.3 Additional Mitigative measures

- The Contractor should hire a competent Environment, health and Safety Personnel to manage all the active sites.
- Awareness creation/Tool box talks on safety to workers while at construction site and documentation kept
- Workers coming to the site should be knowledgeable on safety precautions to take
- Appropriate PPE (helmet, safety harness, gloves, safety shoes, masks, climbing irons among others)
- Proper housekeeping and maintain good hygiene

- Close supervision of workers
- Engagement of trained first aider on site
- Provide safe drinking water for workers
- Availability of equipped first aid box on site
- Risk assessment by contractor of the construction activities and implement mitigation measures appropriately
- Adherence to occupational Safety and Health Act 2007
- Establish Safety committees
- The contractor must acquire insurance for the workers-WIBA cover

7.15 KEY SOCIAL IMPACTS – CONSTRUCTION PHASE

7.15.1 Land Uptake-Communal land

The proposed project will entail the acquisition of a 1. 252 Hectares communal land parcel for setting up the mini-grid. The land acquired may also be used to develop contractor facilities, worker’s camps and other ancillary facilities e.g. storage and sanitary facilities. Loss of land used by the communities for livestock grazing and farming may trigger land disputes. New settlements may arise due to migration of people to the centres near the mini-grid disrupting the existing community settlement patterns. The project proponents will use existing access roads to set up the low-voltage power distribution lines and will seek access from beneficiaries and clients in whose property they will undertake electricity connection to the power grid. During the consultation, it was also reported that the community is not entirely dependent on the land for income. The land has minimal vegetation cover. After implementing the embedded controls, the impact magnitude is assessed to be minor.

7.15.1.1 Source of Impact and Overview of Baseline Conditions

- Additional employment opportunities may also be created for the local youth by the contractor.

7.15.1.2 Embedded/In-built Controls

Enabling the community to benefit from the project by supporting local projects e.g. schools and local water need.

7.15.1.2.1 Significance of Impact

The impact significance for communal land uptake is assessed minor considering the community willfully gave the land for project use.

7.15.1.3 Additional Mitigation Measures

The following additional measures may be recommended to minimise this impact:

- Providing skills-based training interventions, especially for self-employment to the young and unemployed. This will enhance their employability and create potential for income generation through self-employment;
- Procuring resources from the local sources so as to induce more employment in the supply chain.
- Community compensation in kind. The community identifying projects admissible in Water, Health and Education sector within a radius of 10 km. During the public meetings the community identified water project for improvement.

7.15.2 Impact on Occupational Health and Safety

The construction activities include site preparation, infrastructure utilities installation, building

structures. As a result, will be potential impacts on workers' health and safety due to exposure to risks through construction activities that lead to accidents causing injuries and death. The most probable risks cause of accidental death and injury are:

- Safety risks such as: tripping; falling due to working at heights; potential fire due to hot work, smoking, failure in electrical installations; electric shocks.
- Health risks: Injuries such as: lifting, lowering, pushing, pulling and carrying; temporary or hearing loss which usually comes from noise generated from machinery used for excavation or piling work and from compressors and concrete mixers etc.; heat stress and working during high temperatures
- Occupational hazards due to dust and noise pollution from operating of heavy machinery and vehicular movement in the project sites.
- Safety risk due to working at heights during installation of power lines
- Risks of road accidents during the transportation of material and equipment to the project sites owing to the poor road network leading to Nachukui village.
- The minigrid sites are located in ecological zones associated with flash flooding events. This poses a risk of washing away the mini-grid infrastructure including the power storage units i.e., the batteries making it necessary factor in site design considerations to mitigate against extreme flooding events.
- Hire a component Environment, Health and Safety personnel to manage all the active site.
- Hire community Liason officer (CLO)

7.15.2.1 Embedded/in-built control

- All construction activities will be carried out during daytime hours and vigilance should be maintained for any potential accidents;
- Personal Protective Equipment (PPEs) including safety shoes, helmet, goggles, ear muffs and face masks;
- Cranes and other lifting equipment are operated by trained and authorised persons;
- Training of the workers on climbing techniques, and rescue of fall-arrested workers;
- Excavated areas should be temporarily fenced to avoid access to outsiders and wildlife

7.15.2.2 Significance of Impacts

The impact on occupational health and safety during the construction phase is evaluated to be of moderate significance. All the construction activities will be confined at the project site hence high sensitivity and low magnitude.

7.15.2.3 Additional mitigation measures

- All workers (regular and contracted) should be provided with training on Health and Safety management system of the contractor during construction stage and EHS policies and procedures during the operation stage;
- Obtain and check safety method statements from contractors;
- Monitor health and safety performance and have an operating audit system; and
- Permitting system should be implemented to ensure that cranes and lifting equipment is operated by trained and authorized persons only;
- Appropriate safety harnesses and lowering/raising tools should be used for working at heights;
- All equipment should be turned off and checked when not in use; and
- A safety or emergency management plan should be in place to account for natural disasters, accidents and any emergency situations.

7.15.3 Impact on local economy and employment

The construction, operation and maintenance of the mini-grids will provide employment opportunities for skilled and unskilled labour. Receptors in the Social area of Interest that may be able to make the most of the direct and indirect employment opportunities in the project are those who have some level of experience in formal employment, as well as those who have gained a basic education. This will be a source of income for the labourers. Where possible, construction materials will be sourced locally in order to promote local businesses.

Thus, anticipated benefits of the Project include Direct employment opportunities mainly during construction of the mini-grids; indirect employment generated by the procurement of goods and services for the Project; induced employment related to jobs ensuing from the expenditure of incomes associated with direct and indirect. The local community is likely to benefit from the economic opportunities to be created from the following:

- Civil works during construction phase including, construction of solar PV module mounting area, transformer yard, inverter room, internal roads, laydown areas, labour camp, distribution line,
- Self- employment options for individuals possessing vocational or technical training skills like electricians, welders, fitters etc;
- Contracting opportunities for local's residents including men, women and youths. During the public meeting the community insisted that all the unskilled labour force must give to the locals.
- Creation of indirect employment for local community through establishing small shops like tea stalls, supply of intermediate raw materials, repair outlets, hardware stores etc. However, these are likely to be temporary.

The area is characterised by major unemployment. This has affected the community members including the youths, men and woman as reported during Focused group discussion sessions. Thus. the contractor should develop and implement an employment management plan to promote local content. This will ultimately resolve conflict which can be arise if the community feels left out in employment opportunities.

7.15.3.1 Impact Significance

The impact significance will moderate due to the high impact magnitude and the low receptor sensitivity. Due to expected limited job opportunities, a few locals will get jobs at the site that will impact their lives substantially.

7.15.3.2 Enhancement Measures

- A significant segment of labour requirement during the construction phase will be sourced locally. While, the significance of the impact on economy and employment opportunities during the construction phase is understood to be positive, the following measures should be put in place to ensure that the local community receives maximum benefit from the presence of the project;
- Preference should be provided to local labour, sub-contractors or suppliers to pass on maximum economic benefit locally;
- Preference should be provided to the vulnerable population in the Study Area;
- The project proponent will establish a mechanism to audit sub-contractors and suppliers with respect to compliance of utilizing local labour and resources.

7.15.4 Community Health and Safety

The receptors for impacts on community health and safety include project site workers,

settlements in the close proximity of the project which will be exposed to health impacts from the project activities. The construction phase activities such as installation of solar panels, construction of distribution lines and substations and movement of material and personnel may result in impacts on the health and safety of the community.

Construction activities will involve the use of machinery and installation of distribution power lines. Furthermore, the movement of material and personnel via the access roads may result in damage to human life or livestock due to accidents. The major community health and safety risks include structural failure of project infrastructure e.g., power line, fire safety and management of emergency situations.

7.15.4.1 Embedded/in-built control

Consultations with the proponent team and policy review indicated that the following embedded/in built control measures will be put in place during the construction phase;

- The excavated areas will be properly fenced for safety and sign boards in local languages will be put up;
- No hazardous waste or any waste be stored within the site for long periods of time and be in contact with the soil in order to prevent against ground water contamination
- The truck drivers carrying construction machinery and materials will be instructed to drive within speed limits with careful consideration for village traffic;
- Movement of heavy equipment and construction materials will be regulated during peak hours (0900hrs to 0500hrs).

7.15.4.2 Significance of Impact

Impact significance is rated as moderate considering the high impact magnitude and low receptor sensitivity.

7.15.4.3 Additional Mitigation Measures

The following risk mitigation measures are suggested to minimize the risks/ hazards of construction activities onsite;

- Developing an onsite ESMS and EHS Policy by the developer;
- Ensuring that the sub-contractor agreements that the developer enters into require all contractors to possess an EHS plan with provisions for monitoring of the EHS performance of contractors and their workers;
- As part of the stakeholder engagement and information disclosure process, providing an understanding to the community concerning the activities proposed to be undertaken and the precautions being adopted for safety; and
- Implementing the existing grievance redress mechanism.

7.15.5 Labour Influx

The nature of the project will require technical skills that may not be all available in the project areas. This will require movement of construction workers into the project community. With an increase in population of the project area, the social set up may be affected resulting to different negative social impacts such as competition for resources, illicit behaviour and crime (including prostitution, theft and substance abuse).

7.15.5.1 Significance of Impact

The significance of labour influx is considered to be minor because the receptor sensitivity will be medium and the impact magnitude is low. However, except for the technically skilled personnel, most of the labour is expected to be sourced locally.

7.15.5.2 Additional Mitigation measures

- In contract documents for the Contractor, MOE/REREC should make explicit reference to the need to abide by Kenyan law, international best practice and the ratified ILO conventions and MOE's policies in relation to health and safety, labour and welfare standards.
- In selection of a Contractor, MOE/REREC should refer to past performance in similar assignments as an indicator of future performance with respect to worker management, worker rights, health and safety as outlined in Kenyan law and international standards.
- Regular checks by MOE/REREC should be undertaken to ensure the relevant labour laws and occupational health and safety plans are adhered to at all times.
- All project workers should, as part of their induction, receive training on health and safety.
- the contractor should put in place mechanism to ensure no employee or job applicant is not discriminated against on the basis of his or her gender, marital status, nationality, ethnicity, age, religion or sexual orientation.
- All workers will have contracts which clearly state the terms and conditions of their employment and their legal rights. Contracts will be verbally explained to all workers where this is necessary to ensure that workers understand the provisions. Contracts must be in place prior to workers reporting to duty for the first time. The contract document will be enhanced by the Code of Conduct that will be provided by the Proponent.
- The Contractor will put in place a worker grievance redress mechanism accessible to all workers, whether permanent or casual, directly or indirectly employed. The Proponent worker grievance mechanism shall be open to the Contractor workforce in the event that their grievance is not adequately resolved by their direct employer. The Proponent will then have the authority to act to resolve this grievance.
- All project workers should have access to training on communicable diseases and STDs and community interactions in general. This training will be developed in collaboration with local health institutions.
- Carry out surveillance to ensure that no children are employed in the project, and to the extent possible by third parties related to the project and primary suppliers where such risk may exist

7.15.6 Child labour

Implementation of the Nachukui minigrid project could lead to increased opportunities for the host communities to sell goods and services to the incoming workers. This can lead to child labour to produce and deliver these goods and services, which in turn can lead to increased cases of school truancy and dropout.

7.15.6.1 Significance of Impact

The impact is rated minor. This is based on low sensitivity of the receptor and medium magnitude of the impact.

7.15.6.2 Mitigation measures

- The contractor should develop a code of conduct to ensure children are protected from any negative impact from the construction works.
- The contractor should strictly hire people who are above 18yrs and ensure they provide their Identity Cards.
- The contractor shall ensure every worker under their jurisdiction signs a document committing themselves to the protection of the area children.

7.15.7 Impacts on Cultural Heritage

Cultural and paleontological artefacts and cultural landscapes may be disturbed by the construction of the mini grid facilities. These could include community burial sites, sacred shrines. It is expected that a number of workers will be on-site during project construction of the project including skilled, semi-skilled, and unskilled personnel. During the consultation and field survey, no cultural artefact was established at the proposed project site.

7.15.7.1 Significance of Impact

Based on the analysis provided above, impacts on cultural heritage during the construction phase will be Minor considering low sensitivity of the receptor and low magnitude of the impact.

7.15.7.2 Additional Mitigation measures (Execution of a Chance Find Procedure)

In order to minimize the potential for impact to sub-surface cultural archaeological material, the proponent should establish a Chance Find Programme which includes the following provisions:

- A chance find can be reported by any member of the Project. Accordingly, if a chance find is encountered, the first course of action is to stop work in the vicinity of the find. Then the following steps will be undertaken:
- Inform site supervisor/foreman.
- Install temporary site protection measures (warning tape and keep off signs).
- Inform all personnel of the Chance Find if access to any part of the work area is restricted.
- Establish a localized no-go area needed to protect the Chance Find.
- The National Museum of Kenya will be contacted to perform a preliminary evaluation to determine whether the Chance Find is cultural heritage and if so, whether it is an isolate or part of a larger site or feature.
- Artefacts will be left in place when possible; if materials are collected, they will be placed in bags and labelled by an archaeologist and handed over to the National Museum of Kenya; no Project personnel are permitted to take or keep artefacts as personal possessions.
- Document find through photography, notes, GPS coordinates, and maps (collect spatial data) as appropriate.
- If the Chance Find proves to be an isolated find or not cultural heritage, the specialists brought in from the National Museum of Kenya will authorize the removal of site protection measures and activity in the vicinity of the site can resume.
- If the archaeological specialists from National Museum of Kenya confirm the Chance Find is a cultural heritage site, they will inform the project team and initiate discussions with the latter about treatment.
- Prepare and retain archaeological monitoring records including all initial reports whether they are later confirmed or not.

- Develop and implement treatment plans for confirmed finds using the services of qualified cultural heritage experts.
- If a Chance Find is a verified cultural heritage site, prepare a final Chance Finds report once treatment has been completed.
- While investigation is on-going, co-ordinate with on-site personnel keeping them informed as to status and schedule of investigations, and informing them when the construction may resume.
- If mitigation is required, then expedient rescue excavations will be undertaken by the National Museum of Kenya specialist, except in the case that the chance find is of international importance (i.e., Critical Cultural Heritage). If an archaeological site of international importance is encountered special care will be taken and archaeologists with the appropriate expertise in addressing the find will be appointed.

7.15.8 Gender Based Violence, SEA & SH

Gender Based Violence (GBV), Sexual Exploitation and Abuse (SEA) may be committed against the communities by the construction workers and by staff during the operation and maintenance of the mini-grids. Incidences of Sexual Harassment (SH) may occur among the staff during construction, operation and decommissioning phases of the project. During the FGD with the women had highlighted GBV rates to be high in the area and the coming of the project can promote it too. This may be experienced while the women are searching for jobs and those giving the jobs may ask for sexual favours.

7.15.8.1 Significance of Impact

According to the Female FGD conducted, it was noted that cases of GBV are high and mainly Intimate–physical and sexual. Hence, it cannot be ruled out during project implementation. Thus, the significance of this impact is considered to be Minor considering low sensitivity of the receptor and low magnitude of the impact.

7.15.8.2 Mitigation measures

- Prepare an Awareness Raising Strategy, which describes how workers and local communities will be sensitized to GBV risks, and the worker’s responsibilities;
- Identify GBV Services Providers to which GBV survivors will be referred, and the services which will be available;
- Elaborate GBV Allegation Procedures i.e. How the project will provide information to employees and the community on how to report cases of GBV breaches to the GRM.
- An Accountability and Response Framework, to be finalized with input from the contractor, should include at minimum:
 - GBV Allegation Procedures to report GBV issues to service providers, and internally for case accountability procedures which should clearly lay out confidentiality requirements for dealing with cases; and,
 - A Response Framework which has:
 - Mechanisms to hold accountable alleged perpetrators associated to the project;
 - The GRM process for capturing disclosure of GBV;
 - A referral pathway to refer survivors to appropriate support services.

7.15.9 Exclusion of VMGs, Vulnerable Individuals and Households

A significant risk associated with this project is the potential for the exclusion of Vulnerable and Marginalized Groups (VMGs), vulnerable and marginalized households and individuals including the elderly, PLWDs, widows, widowers, orphan-led households, minority clans/sub-clans from participating and or benefiting from the mini-grids project. VMGs participation and inclusion could be disadvantaged based on social identity, which may be across dimensions of gender, age, location, occupation, race, ethnicity, disability, sexual orientation and religion. There is potential risk of lack of intentional actions by the mini-grids contractor(s) and implementing agencies for the inclusion of VMGs in the project activities and benefits. This potentially leads to the exclusion of VMGS from the benefits and opportunities derived from the proposed mini-grid facilities.

The activities of component 1 envisages upon completion of MGs, that the relevant Implementing Agencies will connect customers from community facilities, enterprises and households to the electricity grid on a commercial basis under a market driven approach. There is a high likelihood that the targeted beneficiaries of the new electricity connections to the mini-grids network will be dominated by the local elites. This may lead to the exclusion of those without the financial resources to connect to the mini-grid electricity distribution network. This could result in a situation where a majority persons or households with adequate financial resources in the project area will be able to take advantage of the provision to connect to the electricity grid. This will negate a key objective of the project of overcoming energy poverty.

During the ESIA study the community identified those considered vulnerable in the community include;

- Widows-approximately 70
- Orphans –approximately 350
- Persons Living with Disabilities- Approximately 170
- The elderly (80 years and above)- approximately 100

7.15.9.1 Significance of Impact

Considering the high sensitivity of the VMGs identified in the project and high magnitude, the impact significance is considered to be major. The project site is predominantly Turkana inhabitants and Somali are the minority.

7.15.9.2 Mitigation measures

- Participation will be through meetings with the different groups of the vulnerable people identified primarily to ensure that;
 - The VMGs are aware of the project and its impacts
 - The VMGs are Aware of any restrictions and negative impacts
 - Provide support to VMG participation arrangements in the project
- Confer with the VMGs at the outset on how they wish to be engaged
- Understand and respect local entry protocols as they relate to permission to enter a community and access traditional lands
- Commit to open and transparent communication and engagement from the beginning and have a considered approach in place
- Ensure that all representatives of the contractor and Proponent staff carrying out the specific sub project investment including third party subcontractors and agents are well briefed on local customs, history and legal status, and understand the need for cultural sensitivity
- Regularly monitor performance in engagement

- Enlist the services of reputable advisers with good local knowledge
- Implement the existing grievance redress mechanism

7.15.10 Risk of Communicable Diseases; HIV/AIDS

The construction, operation and maintenance of the mini-grids will lead to increased migration of labour into the mini-grid sites. Local communities can be exposed to increased risk of communicable diseases such as HIV/AIDS through risky behaviours involving job seekers and people employed on the project.

7.15.10.1 Significance of Impact

Based on the fact that the receptor sensitivity will be medium and the impact magnitude low, the impact significance will be Moderate pre-mitigation.

7.15.10.2 Mitigation measures

- The Contractor should develop and implement pre-employment screening measures for workers, which should include applicable diseases. Individuals found to be suffering from these diseases will need to be sensitized on prevention of transmission to others and management of the disease prior to mobilisation to site.
- The Contractor should develop and implement a HIV/AIDS and other STIs policy and an information document for all workers directly related to the Project. The information document should address factual health issues as well as behaviour change issues around the transmission and infection of HIV/AIDS and other STIs.
- The Contractor will make condoms available to employees and communities neighbouring the site office during construction.
- All project personnel should be inducted on a Code of Conduct that gives guidelines on worker-worker interactions, worker-community interactions and development of personal relationships with members of the local communities.
- If workers are found to be in contravention of the Code of Conduct, which they will be required to sign at the commencement of their contract, they will face disciplinary action including dismissal from duty.

7.15.11 Risks related to Inadequate Stakeholder Engagement

Lack of timely and adequate stakeholder engagement during construction is a recipe for dissatisfaction among stakeholders affected and can result to grievances which may turn to conflicts and delays in project construction. With the implementation of the mitigation measures the impact significance is minor.

7.15.11.1 Significance of Impact

The significance of this impact is considered to be Minor considering low sensitivity of the receptor and low magnitude of the impact.

7.15.11.2 Mitigation measures;

- The contractor will design and implement a stakeholder engagement schedule to ensure various stakeholders are engaged at and informed about the project on a timely basis and respond to issues that the stakeholders may require.
- The contractor will also prepare and implement a grievance redress mechanism to deal with grievances. The grievance redress mechanism committee of this GRM should also include representatives from the community.

7.15.12 Community Safety -Access to Site by General Public

If access to the Mini-grid site is not controlled then it can lead to people entering the site including animals. This can result to accidents. Impact significance is rated as moderate considering the high impact magnitude and low receptor sensitivity.

7.15.12.1 Significance of Impact

The significance of this impact is considered to be Minor considering low sensitivity of the receptor and low magnitude of the impact.

7.15.12.2 Mitigation Measures

- Proper barricading
- Awareness creation to community
- Hazard communication.
- Controlled access to the site by designated personnel
- Maintain records of any person who comes to site

7.15.13 Increase in competition for scarce resources and strain on public utilities

The influx of workers in the area is expected to lead to increase in demand for public amenities such as hospitals, transport, schools water resources etc. This could lead to a loss of access to these services by locals especially those who could be among the vulnerable categories. Due an increase in demand, cost of housing near the sites will disadvantage the locals.

The nature of the project will require technical skills that might not be available in the community. This might require movement of construction workers into the community.. It is expected that technically skilled personnel might be sourced from outside the community while the unskilled labour is expected to be sourced locally. It is therefore a possibility that the neighbouring communities might go out looking for opportunities in project area thus creating competition.

7.15.13.1 Significance of Impact

The significance of this impact is considered to be minor because the receptor sensitivity will be medium, and the impact magnitude is low..

7.15.13.2 Mitigation Measures

- Reduction of labor influx by tapping into the local workforce to the extent possible
- Recruitment of local workforce to the extent possible especially unskilled and semi-skilled jobs
- Consultations with and involvement of local community in project planning and other phases of the project
- Awareness-raising among local community and workers on the need to have a good /cordial working relation
- Sensitization/awareness to workers regarding engagement with local community.
- Contactor shall make provision to provide resources needed by the workers if the need for such resources may result to competition e.g., water
- Establishment and operationalization of an effective Grievance Redress Mechanism accessible to community members
- The contractor and the project/community grievance redress committee to work closely address complains raised on time.

- Gender considerations in employment opportunities
- Appropriate compensation for work done
- Respect for community values/culture
- Prompt payments as per the contractual agreements/terms

7.15.14 COVID-19 amongst workers and the community

This impact is triggered during Project Construction Phase and operation phase due to the Project attracting various categories of workers drawn from local, and national markets. This therefore pose risk of spread of COVID-19 and measures should be in place to curb this.

COVID – 19 is a highly infectious disease and since consultations are required during the project implementation, it will also pose a potentially high risk of infection to and among communities. It is important that alternative ways of managing consultations and stakeholder engagement are implemented to mitigate the impacts.

According to the Ministry of Health, Turkana County reported few COVID-19 cases. No significant cases has been reported in Nachukui area. If the status remain the same even at the time of implementation of the project then the significance of this impact pre-mitigation is considered to be moderate

7.15.14.1 Significance of Impact

The receptor sensitivity medium and low magnitude, hence Moderate significance.

7.15.14.2 Mitigation Measures

- Install handwashing facilities with adequate running water and soap, or sanitizing facilities at entrance to main site;
- Ensure routine sanitization of shared social facilities and other communal places routinely including wiping of workstations, doorknobs etc.;
- All workers and visitors accessing the site every day shall be subjected to rapid Covid-19 screening which may include temperature check and other vital signs;
- The project shall put in place means to support rapid testing of suspected workers for covid-19;
- Avoid concentrating of more than 5 workers at one location. Where two or more people are gathered, maintain social distancing of at least 2 meters;
- Sensitize all community segments and project workers on Covid 19 and precautionary measures that need to be observed;
- Avoid concentrating of more than 15 community members at one location. Where two or more people are gathered, maintain social distancing of at least 2 meters;
- The team carrying out engagements within the communities on one-on-one basis will be provided with appropriate PPE for the number of people they intend to meet;
- Restrict site access to only Authorised persons; and
- Continuously adhere to the MoH, WHO and World Bank guidelines on Covid-19 management.

7.16 KEY ENVIRONMENTAL IMPACTS – OPERATION PHASE

7.16.1.1 Waste Generation and management

During operation phase, the waste generated from project includes domestic solid waste building and substation and hazardous waste like waste oil and lubricants and oil containing jutes and rags will be generated during maintenance activities.

The quantity of hazardous and non-hazardous waste generated will be much lesser quantity than during the construction phase. Thus, the receptor sensitivity Impact magnitude has been assessed.

7.16.1.2 Embedded/in-built control

The waste generated will be disposed of through approved NEMA waste handlers.

The hazardous wastes will be stored onsite at separate designated covered area provided with impervious flooring and disposed through NEMA approved hazardous waste handler.

During operation phase, the quantity of municipal waste and hazardous waste generated is less and probability of the hazardous waste generation is only during plant maintenance and therefore occasional. The waste generated would be routed through proper collection and containment.

7.16.1.2.1 Additional Mitigation measures

- The Contractor shall develop a Solid Waste Management Plan in accordance with the guidelines.
- All Project staff will be trained on this plan and attendance will be recorded.
- Preparation and implementation of a Waste Management Plan (WMP) will be done.
- Fuel shall be stored on site in temporary above ground storage tanks.
- Adhere to Kenyan laws and regulations applicable to waste management and the MSDS.
- Proper waste segregation and colour coding of the waste receptacles.
- Provision of temporary ablution facilities and ensure treatment and/or removal of sewage wastes off site.
- Hazardous wastes such as damaged solar panels and batteries that contain heavy metals shall be collected and stored prior to disposal offshore at a licensed facility as per the requirements of the solid waste management plan. This will be done by a Licenced NEMA Waste Handler.
- Any Solar Panel or batteries removed from the array for disposal will first be collected and stored in the covered 10ft container before being disposed off.
- Hazardous waste shall be shipped offshore to a facility licensed by NEMA to handle hazardous waste.
- Maintain all waste tracking documents (Transportation, treatment and disposal)
- Solid Waste Management Code of Practice will be integrated into SOP

7.16.1.3 Significance of Impact

The overall impact significance on land due to waste disposal during O&M phase has been assessed as minor due to medium sensitivity and low magnitude.

7.16.1.4 Additional Mitigation Measures

- Municipal domestic waste generated at site to be segregated onsite;
- Ensure hazardous waste containers are properly labelled and stored onsite provided with impervious surface, shed and secondary containment system;

- Ensure routinely disposal of hazardous waste through NEMA approved waste Handlers and records are properly documented; and
- Maintain all the waste tracking documents (Transport, treatment and disposal)
- The overall impact significance on land due to waste disposal during O&M phase has been assessed as minor.
- Disposal of hazardous wastes shall be done strictly as per the conditions of authorisation granted by NEMA.
- Ensure hazardous waste is properly labelled, stored onsite at a location provided with impervious surface, shed and secondary containment system.

7.16.2 Impact on Water Environment

Water is required during operation phase to meet domestic requirements of O&M staff and for cleaning solar panels. For that purpose, the water requirement will most likely be sourced from existing local water vendors in the nearby area. During operation phase, there will be no wastewater generation from the power generation process.

Discussions with the residents in Nachukui confirmed that water is a major concern in the area. The local community relies on one borehole and Lake Turkana. Therefore, the receptor (water resource) sensitive is assessed as high.

Since the project is likely to generate very little or negligible amount of wastewater during the O&M phase, the impact on water resources will be negligible as there will be no perceptible or readily measurable change from baseline conditions.

7.16.2.1 Embedded/in-built control

Planning of toilets and waste collection areas should be away from natural drainage channels;

7.16.2.2 Significance of Impact

Although the sensitivity of the receptor (surface water) in the project area is high owing to unavailability of feasible alternative source of water for the local community, the overall significance of impacts is assessed to be negligible due to negligible magnitude of the impact.

7.16.2.3 Additional Mitigation Measures

- Ensure proper cover and stacking of loose construction material to prevent surface runoff and contamination of receiving water point;
- The workforce will be given training towards proactive use of designated areas/bins for waste disposal and encouraged to use toilets. Open defecation and random disposal of sewage shall be strictly restricted;
- Construction workers to be sensitised about water conservation and encouraged use of water optimally;
- Regular inspection for identification of water leakages and preventing wastage of water from water supply tankers.
- Recycling/reusing water to the extent possible.
- The contractor should provide portable/mobile toilets for use on site

7.16.3 Landscape and Visual Impacts

The solar panels will be spread over a horizontal form with a maximum height of 2m above the ground level. The current use of land surrounding site is grazing, mixed commercial and

residential. The permanent change of current landscape to area spread with solar panels will have potential visual impact for nearest habitations and passers.

7.16.3.1 Significance of Impacts

It is important to note that whether the visual impact is seen as positive or negative is highly subjective, and people's attitude towards and perception of the visual impacts associated with the any project including solar power project. The project and its surrounding area are new for such developmental project and will have visual impacts during initial period of Project and the same will disappear over a period of time. Based on the above, significance of visual impact on landscape during operation phase of the project has been assessed as minor due to low receptor sensitivity and impact magnitude being medium.

7.16.3.2 Suggested mitigation measures

The following mitigation measures are proposed to reduce the visual impacts on the surroundings during operational phase:

- Signage related to the minigridd must be discrete and confined to entrance gates.
- The footprint of the operations and maintenance facilities, as well as parking and vehicular circulation, should be clearly defined, and not be allowed to spill over into other areas of the site;
- Construction of fencing or compound wall around the project boundary;
- Landscaping area around the solar farm site within the project with the participation of the local community. Some trees can be planted around the buffer zone to Camouflage or Facade or smokescreen the solar panels.

7.17 KEY ECOLOGICAL IMPACT- OPERATION PHASE

7.17.1 Collision and Electrical hazards from Distribution Infrastructure

The wildlife observed in the area are mainly wild birds which have been accustomed to the local habitat. No endangered bird species were observed nor reported at the proposed project area. The distribution lines and poles can potentially constitute an electrocution and collision hazard to birds.

7.17.1.1 Embedded/ in-built Control

There are no embedded controls to prevent birds from roosting/nesting on distribution poles and colliding with distribution wires.

7.17.1.2 Significance of Impacts?

The receptor sensitivity is low and the impact magnitude will be medium hence the minor impact significance.

7.17.1.3 Additional Mitigation Measures

The following mitigation measures will further reduce the impact significance on avifaunal species:

- Design of distribution powerline conductors and transformers should be such so as to minimize the risks of electrocution of birds;
- The distribution poles should be raised with suspended insulators in order to reduce the electrocution of bird species; and
- Marking overhead cables using bird-flight deterrents and avoiding use in areas of high bird concentrations of species vulnerable to collision.

7.18 KEY SOCIAL IMPACTS – OPERATIONS PHASE

7.18.1 Impact on Economy and Employment

Community consultations and observations made during the site visit suggest that the existing scenario of the fishing in the study area is not capable enough to meet requirements of the people who are solely dependent upon it; especially due to the poor fish prices and lack of the required gears.

During the operations phase, the requirement for unskilled and semi-skilled labour is expected to reduce to 5 and 15 respectively. The locally procured services will include maintenance work of the facility, 24-hour security, bush and undergrowth cleaning and housekeeping activities. In addition to this, the community will improve their livelihood and businesses by using the electricity from the project.

7.18.1.1 Significance of Impact

The overall impact significance of the impact on economy and employment during the operations phase is Major, the receptor sensitivity will be medium and the impact magnitude will be high.

7.18.1.2 Additional Mitigation Measures

While, the significance of the impact on economy and employment opportunities during the operations phase is understood to be positive, the following measures should be put in place to ensure that the local community receives maximum benefit from the presence of the project:

- Priority should be provided to local labour or suppliers to pass on maximum economic benefit locally;
- Opportunities should be provided to the vulnerable population in the Study Area

7.18.2 Occupational, Health and public safety Impacts

During the operational phase, it will involve direct use of electricity by the community and maintenance of the power lines. As a result, it will lead to potential impacts on workers' and community member's health and safety due to exposure to risks through that lead to accidents causing injuries and death. The most probable risks include:

- Safety risks such as: tripping; falling due to working at heights during maintenance of the power lines
- Electric shocks in case of poor handling of electricity such as using wet hands, poor wiring and overloading of sockets.

7.18.2.1 Embedded/in-built control

- Community sensitization on health and safety issues
- Training of the workers on climbing techniques, and rescue of fall-arrested workers during maintenance;
- Proper electrical safety signage's on the distribution poles

7.18.2.2 Significance of Impacts

The impact on occupational health and safety during the operational phase is evaluated to be of moderate significance. All the operational activities will be in line with the safety measures hence high sensitivity and low magnitude.

7.18.2.3 Additional mitigation measures

- All workers (regular and contracted) should be provided with training on EHS policies and procedures during the operation stage;
- Monitor health and safety performance and have an operating audit system; and

- Appropriate safety harnesses and lowering/raising tools should be used for working at heights; and
- A safety or emergency management plan should be in place to account for natural disasters, accidents and any emergency situations within the community.

7.19 KEY ENVIRONMENTAL IMPACTS – DECOMMISSIONING PHASE

In the event of decommissioning of the Project, it is likely that any potential impacts would be similar to those in the construction phase, as broadly similar activities would be required and therefore impacts on the physical environment associated with this phase.

7.20 KEY SOCIAL IMPACTS – DECOMMISSIONING PHASE

7.20.1 Impact on Economy and Employment

The major social impacts associated with the decommissioning phase are linked to the loss of jobs and associated income. This has implications for the households who are directly affected, including their families. However, the impacts are likely to be limited due to relatively small number of permanent employees (mainly security guards and PV panel cleaners) who will be affected.

Impact magnitude is considered to be small considering the decommissioning period to last for a short duration.

7.20.1.1 Significance of Impact

The overall impact significance is envisaged to be Minor due to low sensitivity and medium magnitude.

7.20.1.2 Additional Mitigation Measures

The decommissioning phase will require removal of machinery, workers and other temporary structures. The mitigation measures for decommissioning shall include the following:

- Notify the GRC, Local leadership, the County Government reps of the specific jobs and the skills required for the Project
- Prioritize the employment of unskilled labour from the local communities.
- Prioritize the procurement of goods and services from within Turkana County.
- Develop and implement a fair and transparent employment and procurement policy.
- Advertise all jobs and tenders. (The jobs can be advised through local administrative offices, GRC meetings)
- Ensure gender mainstreaming during employment
- The contractor shall inform the workers and local community about the duration of work; and
- Reduction of worker will be done phase wise and corresponding to completion of each activity.
- Proper disposal of waste including debris, panels and other accessories
- Rehabilitation of the project site will be carried out to restore the site to its original status or to a better state than it was originally. This will include replacement of topsoil and re-vegetation which will lead to restoration of the visual quality of the area.

7.21 CUMULATIVE IMPACTS

7.21.1 Cumulative Impact Assessment

It was observed during the site survey that there are no other similar solar projects within the

projects site. Therefore, it is assumed that there will be no cumulative impacts from the above mentioned projects on the local soil, water, land, air and ambient noise environment.

A detailed Environmental and social management plan for preconstruction, construction, operation and decommissioning phase is well illustrated in the table below

Table 18 Environmental Social Management And Monitoring Plan.

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Local employment	<ul style="list-style-type: none"> -Prioritize hire of locals for all unskilled labour. -Implement a local recruitment plan that is fair and transparent (including recruitment processes that ensure inclusivity of both men and women, vulnerable individuals, minority clans, ethnic groups and VMGs. -Adhere to labour laws, and labour management practices (timely remuneration, equitable compensation for both genders for equal work etc.) -Create awareness to workers and the community on worker and project grievance redress mechanisms. 	<ul style="list-style-type: none"> Construction Operations Decommissioning 	Contractor Proponent	<ul style="list-style-type: none"> -Fair and transparent local recruitment plan in place. -Recruitment processes (job adverts, interviews, selection etc.). -Number of locals employed based on gender, vulnerability, ethnic group, clan etc. -Type of employment (skilled, semi-skilled and unskilled). -Grievances raised, those aggrieved, status of resolution. 	Quarterly	Contractor's cost
Local Sourcing	<ul style="list-style-type: none"> -Source materials from local businesses/communities, and where necessary give opportunities to businesses 	<ul style="list-style-type: none"> Construction Decommissioning 		<ul style="list-style-type: none"> -Number and types of businesses sourced from, businesses owned 	Quarterly	No additional cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	owned or operated by vulnerable individuals.			and operated by vulnerable individuals, types and quantities of materials etc.		
Land acquisition and compensation for land and assets on land	<p>In line with the RPF provisions;</p> <p>-The proponent has prepared an Abbreviated Resettlement Action Plan (A-RAP) to guide land acquisition for the mini-grid, wayleaves for power distribution.</p> <p>-The contractor will implement and adhere to agreements for temporal use of land and restoration of land after use.</p> <p>-Compensate affected communities in-kind (priority project) for the loss of land.</p> <p>-The construction activities will be restricted to within the</p>	Pre-Construction	<p>Contractor- (<i>contractors' facilities, workers camps</i>)</p> <p>Proponent- (<i>project land for generation assets</i>)</p>	<p>-Land Acquisition and consultation report (consultation (minutes and lists of participants).</p> <p>-Type and amount of compensation paid to affected persons.</p> <p>- Priority community project implemented and handed over to affected communities.</p> <p>-Signed agreements with communities on the use and restoration of their land.</p>	Quarterly	1,000,000

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>allocated land and the immediate surroundings only.</p> <p>-After construction work, any land taken for a temporary basis for storage of material will be restored to their original form.</p> <p>-Consultations with the community on the low voltage lines.</p> <p>-The design of the distribution line will utilize the existing road reserves. However, any damage to structures, crops, trees, community facilities and other assets will be compensated in line with the RPF provisions.</p>					
Labor Influx and related impacts (SEA/SH, HIV/AIDs and other STIs)	<p>-Tap into the local workforce to the extent possible to reduce labor influx.</p> <p>-Recruit local workforce to the extent possible especially for unskilled and semi-skilled jobs.</p>	Construction Decomissioning	Proponent, Contractor	<p>-Records of employees/updated employee register.</p> <p>-Number of local community employees and</p>	Quarterly	50,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<ul style="list-style-type: none"> -Consult with and involve local community in project planning and other phases of the project. -Raise awareness among local community and workers on the need to have a good /cordial working relation -Sensitize workers regarding engagement with local community. -Make provision to provide resources needed by the workers if the need for such resources may result to competition e.g., water. -Establish and operationalize an effective Grievance Redress Mechanism accessible to community members. -The contractor and the project/community grievance redress committee to work 			external employees/ updated employee register.		

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>closely address complains raised on time.</p> <ul style="list-style-type: none"> -Include gender considerations in employment opportunities. -Provide appropriate compensation for work done. -Respect for community values/culture. -Prompt payment of workers as per the contractual agreements/terms. 					
Child labor	<ul style="list-style-type: none"> -Employ workers who are 18 years and above, and with a valid national ID at the time of hire. -Implement and monitor the employment register regularly. Compliance with the national labor laws and labour management practices. -Put visible signage on site "No Jobs for children" -Do not allow children at the project site. 	Construction Decomissioning	Contractor, Proponent	<ul style="list-style-type: none"> -Updated employment register indicating locals employed, their ages, national identification numbers etc. -Grievances raised, aggrieved persons and status on resolution etc. 	Quarterly	20,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
GBV- SEA and SH	<ul style="list-style-type: none"> -Prepare an SEA/SH Prevention and Response Action Plan, to manage the SEA/SH risks. -The Action Plan to be proportionate to potential SEA/SH risks, and to include measures such as awareness creation for communities and workers; identification of referral services for survivors and a GRM that ensures confidential reporting of GBV cases. -Implement a code of conduct signed by all those with physical presence on site. 	Construction Operations Decommissioning	Contractor Proponent	<ul style="list-style-type: none"> -Minutes of awareness creation sessions for the community and workers on GBV-SEA/SH. -Code of conduct signed by all those with physical presence on site. -GRM that ensures confidentiality of GBV cases in place. Documented referral services for survivors. -Grievances raised, aggrieved persons and status on resolution etc 	Quarterly	50,000.00
Forced Labor	<ul style="list-style-type: none"> -Adhere to the Employment Act which outlaws any form of forced labor. -Report any form of forced labor at the site. -Ensure that all workers have a national ID card or 	Construction Decommissioning	Contractor Proponent	<ul style="list-style-type: none"> -Number of reported cases of forced labor. 	Quarterly	20,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	documentation to show they are adults (above 18 years).					
Risks related to Inadequate stakeholder engagement	<p>-Prepare a stakeholder engagement/consultation plan (SEP) that is proportionate to the subproject and the identified stakeholders.</p> <p>-Timely and prior disclosure of project all project information, including project instruments, the full rights and entitlements of project affected persons, sub-project positive and negative impacts and opportunities, proposed subproject budget.</p> <p>-In line with the SEP, undertake adequate consultations prior to construction and throughout the project cycle with all segments of the community and other relevant stakeholders.</p>	Construction Operations Decommissioning	Contractor	<p>-Availability of and implementation of the Stakeholder Engagement Plan.</p> <p>-# of stakeholder consultations held</p> <p>-Record of stakeholder consultations held (minutes of meetings and list of participants).</p> <p>-Information disclosed, to whom it was disclosed (men women, PWD, youth, vulnerable individuals and households etc., methods and languages used in the disclosure (culturally</p>	Quarterly	30,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>-Prepare and implement a grievance redress mechanism to deal with grievances.</p> <p>-The grievance redress committee to include representatives from the community.</p> <p>-Sensitize stakeholders on SEP and GRM.</p>			<p>appropriate and accessible), grievances raised and status on resolution etc.</p> <p>-Concerns raised and actions raised.</p>		
Exclusion of VMGs and vulnerable individuals and households	<p>In line with the provisions of the ESMF, VMGF and Social Assessment ensure the following.</p> <ul style="list-style-type: none"> • Early identification and inclusion of VMGs and disadvantaged groups. • Meaningful consultation to effectively participate in the project. • Timely and prior disclosure of relevant project information to 	Pre-construction Construction Operations Decommissioning	Contractor Proponent	Minutes of consultative meetings with all community segments including VMGs and vulnerable individuals and households, grievances raised and status on resolution etc.	Quarterly	No additional cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>VMGs and disadvantaged groups.</p> <ul style="list-style-type: none"> • Adequate and ongoing consultations with VMGs and disadvantaged groups in line with the SEP. • All concerns or grievances raised are fully resolved in a timely manner. • Access to culturally appropriate project benefits and opportunities. 					
Inaccessibility of project benefits to VMGs and other vulnerable individuals due to	-Consult VMGs and Vulnerable individuals and households on charges for sub project services, and put in place specific interventions to ensure the vulnerable equally access project benefits.	Operations	Proponent	-Interventions to enable those vulnerable access project benefits. -Number of complaints raised by VMGs/vulnerable individuals	Quarterly	No additional cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
affordability challenges				regarding access to project services. -GRM that is culturally appropriate and accessible. Grievances raised and status on resolution etc		
Inadequate grievances management	<ul style="list-style-type: none"> -Constitute a Local Grievances Committee in consultation with all community segments, and incorporates the existing local dispute resolution mechanism. -Implement a workers grievances mechanism. -Awareness on the culturally appropriate and accessible GRM to all community segments including VMGs, vulnerable individuals and households and CSOs -All reported grievances are logged, dated, processed, resolved and closed out in a timely manner. 	Construction Operations Decommissioning	Contractor Proponent	<ul style="list-style-type: none"> -Local Grievances Committee in place, composition of committee, awareness of community and workers on project and worker GRMs, updated GRM logs, types of grievances -Availability of grievance redress process -Number of grievances reported -Number of grievances 	Quarterly	No additional cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>-Proportionate representation of VMGs and vulnerable individuals in the local grievances committee.</p> <p>-GRM provides for confidential reporting of particularly sensitive social aspects such as GBV, as well as anonymity.</p>			<p>resolved in a timely manner</p> <p>-Number of grievances escalated to national courts and the World Bank Grievances Redress Service and Inspection Panel.</p>		
Environmental Impacts						
Vegetation clearance	<ol style="list-style-type: none"> 1. Clear only the necessary areas 2. Ensure proper demarcation and delineation of the project area to be affected by construction works. 3. Specify locations for vehicles and equipment, and areas of the site which should be kept free of traffic, equipment, and storage. 4. Designate access routes and parking areas 	Construction	Contractor	<p>-Number of trees cleared</p> <p>-Planted trees</p>	Once off	50,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<ol style="list-style-type: none"> 5. Re-vegetation including planting of trees around the plant/facility 					
Soil erosion	<ol style="list-style-type: none"> 1. Avoid groundbreaking during the seasons of high rainfall to avoid erosion. 2. Monitoring of areas of exposed soil during rainy seasons to ensure that any incidents of erosion are quickly controlled. 	Construction	Contractor	Assess size of rills or Gulleys forming from accelerated run off from compacted areas	Quarterly	Part of contractor's fee

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>3. Construction related impacts like erosion and cut slope destabilizing should be addressed through landscaping and grassing, carting away and proper disposal of construction materials</p> <p>4. Use silt traps where necessary</p> <p>5. Cover soil stock piles</p> <p>6. Landscaping with grass on areas without electrical installation (lower areas)</p> <p>7. Monitoring of areas of exposed soil during rainy seasons to ensure that any incidents of erosion are quickly controlled.</p>					

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Contamination of soil from fossil fuels	<ol style="list-style-type: none"> 1. Ensure waste water generated is discharged or drained into approved drainage facilities 2. Construction vehicles must be maintained in good state and proper servicing to ensure no oils are likely to leak 3. Care must be exercised not to spill any fossil fuels 4. Any contaminated soil shall be scooped and disposed-off appropriately. 5. No servicing vehicles on site 	Construction	Contractor	Records of any leakages from construction equipment/ vehicles.	Quarterly	50,000.00
Dust emissions	<ol style="list-style-type: none"> 1. The construction area should be fenced off to reduce dust to the public 2. Suppress dust during dry periods by use of water sprays; 	Construction	Contractor	<ul style="list-style-type: none"> -Visual Observation of dust -Provision of PPEs especially masks 	Daily	100,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>3. Stockpiles of excavated soil should be enclosed/covered/watered during dry or windy conditions to reduce dust emissions.</p> <p>4. Burning of woody debris & construction waste to be prohibited</p> <p>5. Use of personnel protective equipment (PPE) -masks should be provided to all personnel in areas prone to dust emissions</p> <p>6. Restrict speed on loose surface roads during dry or dusty conditions</p> <p>7. Keep stockpiles and exposed soils compacted and re-vegetate as soon as possible.</p> <p>8. Construction trucks moving materials to site,</p>					

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>delivering sand and cement to the site should be covered to prevent material dust emissions into the surrounding areas</p> <p>9. Plant short trees to break speed of wind</p>					
Vehicle exhaust and emissions from Generator	<ol style="list-style-type: none"> 1. Drivers of construction vehicles must be sensitized so that they do not leave vehicles idling so that exhaust emissions are lowered. 2. Maintain all machinery and equipment in good working order to ensure minimum emissions of carbon monoxide, NO_x, SO_x and suspended particulate matter 3. Maintain equipment in good running condition – no vehicles to be used 	Construction	Contractor	<ul style="list-style-type: none"> -Engine maintenance records - inspection of stacks 	Quarterly	100,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>that generate excessive black smoke</p> <p>4. Use of diesel which is Sulphur- free to run the power producing generators to be encouraged</p> <p>5. The stack chimney of the generators will be increased from its normal height of 3 meters to 6 meters</p>					
Solid waste generation	<p>1. Ensure spoil from excavations is arranged according to the various soil layers. This soil can then be returned during landscaping and then rehabilitation, in the correct order which they were removed that is top soil last;</p> <p>2. Segregate waste</p>	Construction	Contractor	Presence of well-maintained receptacles and centralized collection points	Quarterly	100,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<ul style="list-style-type: none"> 3. Provide litter collection facilities such as bins 4. Contractor to put in place and comply with a site waste management plan 5. The contractor should comply with the requirement of OSHA ACT 2007 and Building rules on storage of construction materials 6. Use of durable, long-lasting materials that will not need to be replaced as often, thereby reducing the amount of waste generated over time 7. Recovery of materials remains and return to stores 					

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<ul style="list-style-type: none"> 8. Re-use of materials where possible 9. Proper budgeting to avoid waste generation 10. Proper disposal of waste in line with solid waste regulation 6. Construction wastes to be managed in accordance with construction standards in Kenya 					
Impacts on Water Resources and Water Quality	<ul style="list-style-type: none"> 1. Clear the necessary areas only. 2. Appropriate remedial measures shall be implemented by the contractor in the event of erosion. 3. Infrastructure shall be designed to ensure that contaminated run-off does not reach water source i.e., earth dam. 	Construction	Contractor	<ul style="list-style-type: none"> -Oil spill containment plan. -Provision of fuel/oil drip and spill trays 	Quarterly	150,000

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>4. Contractor to develop an oil-spill containment plan as part of the emergency response plan. In the event of an oil spill the procedures contained in the emergency response plan of the contractor will come into effect.</p> <p>5. No vehicle maintenance and service shall be done at project site</p> <p>7. Ensure that potential sources of petro-chemical pollution are handled in such a way to reduce chances of spills and leaks.</p>					

Noise & vibration	<ol style="list-style-type: none"> 1. Construction activities to avoid any unchanneled flow of water at the site 2. Storage areas that contain hazardous substances should be bunded with an approved impermeable liner and provision for a pit to be made in case of oil spill. 3. The excavation and use of rubbish pits during construction should be strictly prohibited. 4. A waste disposal area should be designated within the active construction area and this should be equipped with suitable containers i.e., skips or bins of sufficient capacity and designed to contain and prevent refuse from being blown by wind, 11. Areas contaminated by spilled concrete and/or fuels and oils leaking 	Construction	Contractor	<u>Noise levels-</u> Records of noise measurements done by contractor within the project area and at distances of 30m from the Solar mini-grid	Quarterly	150,000.00
------------------------------	--	--------------	------------	---	-----------	------------

	from vehicles and machinery should be cleaned immediately					
--	---	--	--	--	--	--

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Impacts from Hazardous materials -	<ol style="list-style-type: none"> Maintenance of construction vehicles will not be done on site All hazardous products and waste should be labeled and handled properly to avoid contact with the ground Dispose hazardous waste through a NEMA approved waste handler 	Construction	Contractor	Presence of well-maintained receptacles and centralized collection points	Quarterly	100,000.00
Accidental Oil Spills or Leaks	<ol style="list-style-type: none"> In the event of accidental leaks, contaminated top soil should be scooped and disposed of appropriately. Refueling and maintenance of vehicles will not take place at the construction site. Create awareness for the employees on site on procedures of dealing with spills and leaks Vehicles and equipment must be serviced 	Construction	Contractor	Records of all accidental spills and number of liters	Quarterly	150,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>regularly and kept in good state to avoid leaks.</p> <p>5. In case of spillage the contractor should isolate the source of oil spill and contain the spillage using sandbags, sawdust, absorbent materials and/or other materials approved by materials.</p> <p>6. All chemicals should be stored within the bunded areas and clearly labeled detailing the nature and quantity of chemicals within individual containers.</p>					
Fire Hazards	<ol style="list-style-type: none"> 1. Create awareness to the construction workers on potential fire hazards 2. Provision of firefighting equipment on site during construction. 3. No smoking shall be done on construction site 	Construction	Contractor	<ul style="list-style-type: none"> -Records of any Fire incidences -Fire equipment and evacuation plan 	Quarterly	100,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<ol style="list-style-type: none"> 4. 'No smoking' signs shall be posted at the construction site 5. A fire risk assessment and evacuation plan should be prepared and must be posted in various points of the construction site including procedures to take when a fire is reported. 6. Designate an assembly point 					
Impacts of construction material sourcing (e.g., quarrying)	<ol style="list-style-type: none"> 1. Source all building materials such as stone, sand, ballast and hard core from NEMA approved sites. 2. Ensure accurate budgeting and estimation of actual construction materials to avoid wastage. 3. Reuse of construction materials where possible. 	Construction	Contractor	Sources of raw materials (from local community)	Quarterly	Part of contractor's cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Increased water demand	<ol style="list-style-type: none"> 1. Prudent use of available water 2. Consultations with the project local committee on use of water in the community to avoid conflicts with the community 3. Source and utilize a sustainable and reliable water supply for both construction and operation phase. 	Construction	Contractor	Water usage records	Quarterly	Part of contractor's cost
Energy Consumption	<ol style="list-style-type: none"> 1. Ensure responsible electricity use at the construction site through sensitization of staff to conserve electricity by switching off electrical equipment or appliances when they are not being used. 2. Proper planning of transportation of materials will ensure that 	Construction	Contractor	Energy consumption records	Quarterly	No additional cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>fossil fuels (diesel, petrol) are not consumed in excessive amounts.</p> <p>3. Complementary to these measures, they monitor energy use during construction and set targets for reduction of energy use.</p>					
Occupational Health and safety Impacts	<ol style="list-style-type: none"> 1. Use skilled personnel for activities which demand skills/technical tasks 2. Awareness creation/Tool box talks on safety to workers while at construction site 3. Workers coming to the site should be knowledgeable on safety precautions to take 4. Appropriate PPE (helmet, safety harness, boots, masks, climbing irons) 5. Proper general house keeping 	Construction	Contractor	<p>Records of any near misses, incident, and accidents.</p> <p>Records of corrective actions implemented if there was an accident.</p>	Quarterly	1,000,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<ul style="list-style-type: none"> 6. Close supervision of workers 7. Risk assessment by contractor of the construction activities and implement mitigation measures appropriately 8. Adherence to occupational Safety and Health Act 2007 9. Availability of equipped first aid box on site 10. Provide safe drinking water for workers 11. Engagement of trained first aider on site 12. Ensure the WIBA cover is taken for the staff 13. Establish safety committees 					

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Community safety –access	<ol style="list-style-type: none"> 1. Proper barricading 2. Hazard communication. 3. Controlled access to the site by designated personnel 4. Maintain records of any person who comes to site 	Construction	Contractor	Presence of a controlled access and records of every person accessing the site	Daily	20,000.00
Public Health Impacts	<ol style="list-style-type: none"> 1. Sensitize workers and the community on prevention and mitigation of HIV/AIDS and other sexually transmitted diseases, through staff training, awareness campaigns and community <i>Barazas</i>. 2. Awareness creation and consultations with local communities prior and during construction on the dangers of these diseases 	Construction	Contractor	Number of awareness creation sessions conducted. -Availability of and distribution of condoms	Quarterly	20,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<ul style="list-style-type: none"> 3. Informing workers on local cultural values and health matters. 4. Provision of condoms to workers 5. Allowing migrant workers time to be with their families 6. The contractor is impressed upon not to set a construction camp on site. 7. The contractor will provide public education/information about HIV/AIDS transmission and prevention measures. 8. Ensure equal treatment of workers 9. Provide all appropriate COVID-19 preventive 					

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	measures including campaign to maintain individual measures at the workplace.					
Sanitary waste	1. Construct/ install pit latrines for both genders clearly labelled	Construction	Contractor	Presence of separate and clean washrooms for both the gents and ladies	Quarterly	300,000.00
Solid Waste Generation	<ol style="list-style-type: none"> 1. Provide waste handling facilities such as labeled waste bins 2. Emphasis on prudent waste generation and give priority to reduction at source 3. Solid waste management awareness to operators 4. Operator to contract a NEMA licensed waste handler to collect and dispose solid waste 	Operation	Contractor	Presence of well-maintained receptacles and centralized collection points	Quarterly	50,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Liquid Waste/Oils Generation	<ol style="list-style-type: none"> 1. Proper storage of the oil is required to ensure no leakages 2. Frequent inspection and maintenance of the generator to minimize leakages. 3. No vehicles should be serviced or maintained at the Mini-grid area. 4. The waste oil or used oil must be disposed-off appropriately. 5. Proper training for the handling and use of fuels for the operators of the Mini-grid. 6. In the event of accidental leaks, contaminated top soil should be scooped and disposed of appropriately. 	Operation	Contractor	<ul style="list-style-type: none"> -Engine maintenance records -Oil spill containment plan 	Quarterly	200,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Increased oil Consumption	<ol style="list-style-type: none"> Efficient energy consumption Install an energy-efficient lighting system 	Operation	Contractor	Energy consumption records	Quarterly	No additional cost
Increased storm water flow	<ol style="list-style-type: none"> Construct the drainage system in a way to follow natural drain of the water Concrete only the required area and leave the rest of the land with vegetation like grass Construct rain water harvesting system on the control buildings/office and harness into storage tanks for use 	Operation	Contractor	Provision of a drainage system and a rain water harvesting system	Quarterly inspections	200,000.00
Fire Outbreaks	<ol style="list-style-type: none"> The power plant must contain firefighting equipment (Portable fire 	Operation	Contractor	-Provision of serviced fire equipment,	Quarterly	50,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>extinguishers) of recommended standards and in key strategic points</p> <p>2. Detection/alarm systems that can detect fire should be and installed</p> <p>3. A fire evacuation plan should be prepared and posted at strategic points and should include procedures to take when a fire is reported.</p> <p>4. Workers especially operators of the plant must be trained on fire management</p> <p>5. 'No smoking' signs shall be posted within the Mini-grid area</p>			<p>evacuation plan and safety signages</p> <p>-Records of fire safety training</p>		

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	6. A fire Assembly point should be identified and marked					
Visual Impacts	1. Fence round the solar Mini-grid to keep off/screen the solar panels.	Operation	Contractor	Presence of a perimeter fence	Quarterly inspections	No additional cost
Water demand	<ol style="list-style-type: none"> 1. Ensure prudent use of water. 2. Install water-conserving automatic taps. 3. Any water leaks through damaged pipes and faulty taps should be fixed promptly. 	Operation	Contractor	Water records usage	Quarterly	20,000.00
Sanitary waste	<ol style="list-style-type: none"> 1. Provide sanitary waste facilities for both genders clearly marked 2. Disposal of waste through septic tanks 	Operation	Contractor	Presence of separate and clean washrooms for both the gents and ladies	Quarterly	No additional cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Flooding	<ol style="list-style-type: none"> 1. Ensure drainage channels are free of any obstruction at all times i.e., not blocked 2. Construct more channels and or expand existing ones 3. Raise foundations of the solar panels and ensure a proper and from concrete base 4. Create flooding diversions and or spill ways to divert water from getting into the solar power facility 	Operation	Contractor	<ul style="list-style-type: none"> -Provision of drainage system -Raised foundations for the structures 	Quarterly	100,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Occupation health and Safety	<ol style="list-style-type: none"> 1. Ensure only qualified staff are employed to work in the facility 2. All workers operating the Mini-grid must be equipped with appropriate and adequate person protective equipment (PPE) such as; safety footwear, helmet among others. 3. Operators must be skilled on firefighting management 4. Annual environmental audits should be done 5. WIBA cover for staff is mandatory 	Operation	Contractor	-Provision of PPEs and WIBA cover -Environmental audit reports	Quarterly	100,000.00
Hazardous waste-damaged panels	<ol style="list-style-type: none"> 1. Segregation from other waste streams 	Operation	Contractor	Presence of well-maintained receptacles and centralized collection	Quarterly	200,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	2. Proper disposal through a NEMA approved/licensed handler					
Noise and Vibration	<p>1. Generator room should be sound proof to ensure no noise of a nuisance level will be produced.</p> <p>2. Monitor noise levels</p>	Operation	Contractor	Noise _____ levels- Records of noise measurements done by contractor within the project area and at distances of 30m from the Solar mini-grid	Quarterly	Part of contractor's cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Shocks and electrocutions	<ol style="list-style-type: none"> 1. Inspect the wiring of the houses before connecting power 2. Safety awareness campaigns to the community before connection of power on safety precautions such as: <ul style="list-style-type: none"> ○ Require community to engage a certified technician to do wiring in the premises ○ Use of quality materials while wiring ○ Refraining from individual illegal extensions of power lines to other houses ○ Observing safety measures while using electricity such as not touching sockets and switches with wet hands or wiping with wet cloths 	Operation	Contractor, Consumer	<ul style="list-style-type: none"> -Records of awareness sessions conducted -Incidences report 	Quarterly	No additional cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<ul style="list-style-type: none"> ○ Keeping off all electricity infrastructure e.g., not tying livestock on electric poles, no cutting earth wires that run along some electric poles, not interfering with sockets or switches ○ Reporting any electric wire/conductors if found fallen on the ground ○ Report any incident regarding electricity at the local office –staff in charge of operating the Mini-grid 					
Community Safety- Access to site by general public	1. Fencing off the facility to keep of community members, children and livestock from entering into the facility	Operation	Contractor	Presence of a controlled access and records of every person accessing the site	Daily	Part of contractor's cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<ul style="list-style-type: none"> 2. Controlled access to the site only with prior approval 3. Maintain records of any person who comes to site 					
Risks related to poor or inadequate stakeholder engagement (Conflict)	<ul style="list-style-type: none"> 1. Employ from the community to the extent possible 2. Engage the community members and other stakeholders in a timely manner 3. Work closely with the GRM committee members in solving the conflicts 4. Solve all conflicts/grievances at the earliest time possible 5. Ensure all grievances are logged and closed 	Operation	Contractor, Proponent	Grievance records	Quarterly	20,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	6. Monitoring the pattern of grievances to come up will long term measures					
Gender Based Violence –SEA and SH	To manage GBV risks, the contractor will prepare a SEA/SH Prevention and Response Action Plan that will include a GRM that ensures confidentiality. The plan will include the necessary measures for prevention and response and must ensure survivor-based approach	Operation	Contractor	-SEA/SH Prevention and Response Action Plan -Grievance records	Quarterly	20,000.00
Public Health Impacts – HIV/AIDs	1. Sensitize workers and the community on prevention and mitigation of	Operation	Contractor	Number of awareness creation		20,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>HIV/AIDS and other sexually transmitted diseases, through staff awareness and awareness campaigns for the community</p> <p>2. Provision of condoms to workers</p> <p>3. Allowing migrant workers time to be with their families</p>			<p>sessions conducted.</p> <p>-Availability of and distribution of condoms</p>		
<p>Public health Impacts - Covid 19 disease</p>	<p>1. Social distance must be observed</p> <p>2. Provision of hand wash facilities before access</p> <p>3. Temperature check and monitoring of the temperature of workers and any other person coming to site</p> <p>4. Enforce wearing of masks</p>	Operation	Contractor	<p>Availability of hand washing facilities</p> <p>Utilization of hand washing facilities</p> <p>Number of Covid-19 cases reported</p>	Quarterly	30,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>5. Make provision for testing and treating especially of workers</p> <p>6. Provision of contact numbers for the nearest health facility for testing and treatment</p> <p>7. Adhering to any other measures from the ministry of health which may be issued from time to time</p>					

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Dust Emission	<ol style="list-style-type: none"> 1. Trees can be planted around the plant/facility provided they do not cast shadows to the solar panels to act as wind breakers and hence decrease dust pollution 2. Ensure planting of grass around and within the facility compound 	Operation	Contractor	Visual inspection	Quarterly	50,000.00
Vehicle Exhaust Emissions	<ol style="list-style-type: none"> 1. Drivers of the vehicles must be sensitized so that they do not leave vehicles idling so that exhaust emissions are lowered. 2. Company vehicles should be well maintained 	Operation	Contractor	Engine maintenance records	Quarterly	No additional cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Noise and Vibration	<ol style="list-style-type: none"> 1. Install portable barriers to shield compressors and other small stationary equipment where necessary. 2. Use quiet equipment (i.e., equipment designed with noise control elements). 3. Co-ordinate with relevant agencies in case the noise produced will require a license. 4. Limit pickup trucks and other small equipment to a minimum idling time and observe a common-sense approach to vehicle use and encourage workers to shut off vehicle engines whenever possible. 5. Demolish mainly during the day when most of the 	Decommissioning	Contractor	Noise levels- Records of noise measurements done by contractor within the project area and at distances of 30m from the Solar mini-grid	Once off	20,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	neighbors are out working.					
Solid Waste Generation	<ol style="list-style-type: none"> Demolition contractor to adhere to the various manufacturer's guidelines and requirements regarding demolition and disposal Segregation of waste in order to separate hazardous waste from 	Decommissioning	Contractor	Presence of well-maintained receptacles and centralized collection points	Daily	700,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>nonhazardous waste and other streams of waste</p> <p>3. Provision of facilities for proper handling and storage of demolition materials to reduce the amount of waste caused by damage or exposure to the elements</p> <p>4. Adequate collection and storage of waste on site</p> <p>5. Safe transportation to the disposal sites / designated area</p> <p>6. Hazardous waste must be disposed by NEMA approved waste handler</p>					
Dust Emissions	1. Cover all trucks hauling soil, sand and other loose materials or require all trucks to maintain at	Decommissioning	Contractor	Visual inspection	Daily	20,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	least two feet of freeboard					
Public Health-HIV/AIDS	The project will sensitize workers and the surrounding communities on prevention and mitigation of HIV/AIDS and other sexually transmitted diseases, through staff training and awareness campaigns/ to the community.	Decommissioning	Contractor	Records of awareness creation sessions conducted. -Availability of and distribution of condoms	Once off	20,000.00
	Total					5,380,000.00

7.22 APPROACH TO IMPLEMENTATION OF ESMMP

Table 9: Institutional Framework and Compliance/Implementation of the ESIA/ESMMP

No	Institution	Role/Function
1	The National Environment Management Authority (NEMA)	NEMA: <ul style="list-style-type: none"> • Approves the ESIA Report; • Issues EIA License for project implementation; and • Carries out independent Audit to determine compliance with ESMMP.
2	Directorate of Occupational Safety and Health Services (DOSHS)	DOSHS: <ul style="list-style-type: none"> • Provides OSH permits for workplaces of the project including campsites and quarries; and • Conducts inspections to ensure conformance to OSHA.
3	Water Resources Authority (WRA)	WRA: <ul style="list-style-type: none"> • Provides necessary water abstraction permits for boreholes and surface water sources (rivers, streams etc.); and • Monitors water use in the region and provide guidance water use.
4	National Land Commission (NLC)	NLC: <ul style="list-style-type: none"> • Exercises the power of compulsory land acquisition on behalf of MoE and vest the acquired land to MoE.
5	National Gender and Equality Commission	The Commission: <ul style="list-style-type: none"> • Ensures that there is gender equality and equity throughout the implementation of the project; and • Representatives will monitor and evaluate gender quality and equity with regards to job provision and harassment cases on site to ensure compliance with the law
6	Development of Ministry of Trade, Gender and Youth Affairs	<ul style="list-style-type: none"> • Work with poor, marginalized, vulnerable and disadvantaged communities as its primary target group will ensure that this group is supported and is not left out of the project implementation.
7	County Government of Turkana	County Governments will: <ul style="list-style-type: none"> • Provide approval for the project & project site; • Approval of community land consent & verification; and • Provide support.

8	Supervision Consultant	<p>Supervising Consultant:</p> <ul style="list-style-type: none"> • Will engage the following dedicated full-time safeguards staff to support risk management: <ul style="list-style-type: none"> ✓ Supervising Engineer (RE) ✓ Social Safeguards Specialist ✓ Environmental Safeguards Specialist • Review and approval of the ESMMPs and other plans; • Day to day supervision of Contractor implementation of the ESMMPs and other plans; • Regular reporting on the ESMMP implementation; and • Has full time Environmental, Health and Safety and Social Specialists
9	Contractor	<p>Contractor:</p> <ul style="list-style-type: none"> • Will engage the following dedicated full-time safeguards staff; <ul style="list-style-type: none"> ✓ Environmental Safeguards Specialist ✓ Social Safeguards Specialist ✓ Registered Occupational Health and Safety (OHS) Expert ✓ Community Liaison officer to act as link between the community and contractor and to support the social specialist. • Will Prepare the C-ESMPs informed by the proponent's ESMMP and other plans before commencing construction; • Will Operationalize and implement the C-ESMPs; • Carries out day to day management of ES, H& S risks; and • Reports on incidents and accidents to the Resident Engineer and regulators.

7.23 MANAGEMENT PLAN DURING CONSTRUCTION PHASE

The contractor will prepare targeted management plans to deal with specific environmental and social aspects guided by the ESMMP and any other emerging issues on the ground. The contractor shall prepare these plans and have them approved by both the proponent and the Bank before they mobilize to the site:

- Construction management plan
- Rehabilitation and site closure plan
- Local recruitment plan
- Workplace health and safety plan
- Community safety plan
- Emergency management and response plan
- SEA/SH Prevention and Response plan
- Stakeholder Engagement plan
- Grievance Redress mechanism
- Labor influx management plan

7.23.1 Construction Management Plan

The construction management plan for the proposed project shall include the following:

a) Management of Fuels and other Hazardous Materials

- The Contractor shall comply with all applicable laws, regulations, permit and approval conditions and requirements relevant to the storage, use, and proper disposal of hazardous materials.

b) Management of the Construction Site

- The contractor shall prevent littering and the random discard of any solid waste on or around the construction site
- The contractor shall manage other solid and liquid waste

c) Fire Prevention and Management

- The Contractor shall take all necessary precautions to prevent fires caused either deliberately or accidentally during construction process.
- The Contractor shall prepare a fire prevention and fire emergency plan as a part of the plans to be submitted to REREC.

d) Management of Air Quality

- The Contractor shall institute appropriate measures to minimize or avoid air quality impacts. This can be achieved through formulation of air quality management plan.

e) Neighbouring Land Owner and Occupier Relations

- The Contractor shall respect the property and rights of neighbouring landowners and occupiers at all times and shall treat all persons with deliberate courtesy.
- The contractor shall respect any special agreements between REREC and the neighbours e.g., the wayleaves agreements signed between Kenya power and landowners will need to be respected by the contractors.

f) Complaints Register

The contractor shall establish and maintain a register for periodic review by REREC that logs all the complaints raised by the neighbours or the general public about construction activities. The register shall be regularly updated, and records maintained including the name of the complainant, his/her domicile and contact details, the nature of the complaint and any action taken to rectify the problem.

g) Construction Control

The construction control for the proposed project shall cover the following:

H) Control of Access

The contractor shall ensure that the construction site is accessed by authorized persons only and up-to-date records kept

Control of material supply and burrow areas

- The contractor shall, as far as possible, source all material needed to construct the proposed project from the licensed quarries
- In instances where materials are to be obtained from a new burrow area; the contractor shall comply with relevant legislations.

- The contractor shall prepare a method statement including plans, detailing the expected quantity of excavation, temporary and permanent drainage control, the final contouring of the burrow pit and the proposed method of rehabilitation.

7.23.2 Rehabilitation and Site Closure Plan

- After completion of construction activities, the contractor shall clear the site of construction materials and dispose wastes in appropriate disposal sites.
- The contractor shall remove all temporary works on the construction site and grow grass on areas that are not covered by the installations to control erosion.

7.23.3 Local Recruitment Plan

The contractor will prepare a local recruitment plan to guide on recruitment of locals. The plan shall pay attention or adhere to Employment Act.

In designing the local recruitment plan contractor shall:

- Comply with the provisions of Employment Act, 2007
- Wherever possible, give priority to qualified local people when hiring employees.

The mitigation measure is:

- Prepare a local recruitment strategy that is fair and transparent to ensure all community segments - men, women, vulnerable individuals, minority clans, and VMGs who meet OP 4.10 criteria) - can access subproject benefits during construction and that prioritizes hire of locals for skilled, semi-skilled and unskilled labour.

7.23.4 Workplace Health and Safety Plan

The workplace health and safety plan to be implemented by the contractor and REREC shall include the following key measures:

- The contractor shall comply with all relevant legislative requirements governing worker health and safety at the work place (e.g., OSHA 2007 and its subsidiary legislations).
- The contractor shall prepare and implement measures to minimize diseases likely to be contracted by the construction workers as a result of the proposed project such as HIV & AIDs and other communicable diseases
- The contractor shall have obligations of managing the safety of its employees by;
 - Provision of appropriate PPEs to employee
 - Training employees on competence
 - Employing competence and qualified staff
 - Provision of First Aid Kits onsite
 - Should have a trained first aider
 - Document and create awareness on safe work procedures and work instruction

- The contractor will manage accidents by having an emergence response plan which will include contacts for emergency service providers e.g., ambulances, fire brigade and nearest hospitals
- Health and safety performance will be continuously monitored, and procedures reviewed with the aim of eliminating risk as far as reasonably practicable.

7.23.5 Community Health and Safety Plan

The community health and safety plan to be implemented by the contractor shall include:

- Adherence to OSHA 2007 Act and its subsidiary legislations to ensure that health and safety of immediate neighbours and the public is not threatened.
- The contractor to ensure that construction work is undertaken in manner not likely pose risks to community health and safety.
- The contractor shall undertake an independent risk assessment prior to construction. The findings of this assessment will inform the development of a community safety plan and create awareness to the community on the same.

7.23.6 Emergency Preparedness Plan

The Contractor shall develop an emergency plan that will enable rapid and effective response to all types of environmental emergencies in accordance with recognized national and international standards.

The emergency plan shall include establishment of a network of communication between the Contractor and emergency services including police, ambulance services, and fire brigades among others.

7.23.7 SEA/SH Prevention and Response Action Plan

The contractor will prepare a SEA/SH Prevention and Response Action Plan that will include a Grievance Management that ensures confidentiality. The plan should have an Accountability and Response Framework. The plan will include the necessary measures for prevention and response of GBV impacts.

The mitigation measures shall include:

- Ensure that local employment opportunities are equitably accessible to all segments of the community,
- Ensure equal pay for equal work
- Prepare and implement GBV (SEA/SH management) plan that includes sensitisation of community members and subproject workers on the potential of the subproject giving rise to, exacerbating and/or mitigating SEA and SH, and the appropriate mitigation measures
- Map all GBV service providers and document referral services for survivors, and, sensitize community members and subproject workers on the referral pathways.

- Prepare and implementing a functional and accessible contractor GBV GM for use by workers and community members (as appropriate).
- The GBV GM should allow for anonymous incident reporting and should be GBV survivor-centric
- Sensitize community members and workers on contractor GRMs
- Prepare and sensitise Code of Conduct (CoC) for SEA and SH, and their responsibilities for the same, to demystify the stigma associated with SEA and SH

7.23.8 Stakeholder Engagement Plan

A Stakeholder Engagement Plan is a formal approach to communicate with project stakeholders to achieve their support for the project. The plan prepared shall specifies the frequency and type of communications, media, contact persons, and locations of communication events. The SEP is a useful tool for managing communications between the contractor and other stakeholder. The plan should meet the following objective of a SEP.

- To help improve project design and implementation
- To inform third parties about changes that affect them
- To take their views into account in the implementation of projects
- To identify adverse impacts and mechanisms to enhance project benefits
- To identify risks from and to a project
- To increase project ownership and sustainability
- To comply with Bank policies that require consultations

The plan shall put this measure in to consideration:

- In consultation with the identified stakeholders, prepare a stakeholder engagement plan (SEP) that is based on their locations (maps) and their information needs at the various subproject phases

7.23.9 Labor Influx Management Plan

The purpose of this plan is to provide a clear set of actions and responsibilities for the control of impacts linked to in-migration within the Project's area of influence. This plan will be regularly reviewed and updated to reflect revised Project design, socio-economic changes and learning experienced during its implementation.

The objectives of this plan are as follows:

- Monitor the scale of project induced in-migration into the project area and specific in-migration 'hotspots';
- Support local government and communities to manage both internal and external immigration into the project area; and
- Mitigate and manage any negative impacts and enhance and promote any positive impact related to labor influx.

The plan shall consider these measures:

- ❖ Prepare and Implement a Labour Management Plan (LMP) with policies and measures for ensuring that:
 - Subproject managers and workers are sensitised on:
 - ✓ County/National Labour laws
 - ✓ County/National Child Labour laws
 - ✓ National/International Forced Labour laws
 - Enforce:
 - ✓ The Code of conduct
 - ✓ County/National Labour laws
 - ✓ County/National Child Labour laws
 - ✓ National/International Forced Labour laws

7.23.10 Grievance Redress Mechanism and Grievance Mechanism

One of the key roles of the Grievance Redress Committees, will be to address disputes led by the administrative chiefs. All PAPs will be informed how to register grievances or complaints, including specific concerns about land and environment. The PAPs will be informed about the dispute resolution process, specifically about how the disputes will be resolved in an impartial and timely manner.

Grievance mechanisms should receive and facilitate resolution of the affected institutional or communities' concerns and grievances. Community concerns should be addressed promptly using an understandable and transparent process that is culturally appropriate and readily acceptable to all segments of affected communities, at no cost and without retribution. Mechanisms should be appropriate to the scale of impacts and risks presented by a project. Grievances can be an indication of growing stakeholder concerns (real and perceived) and can escalate if not identified and resolved. The management of grievances is therefore a vital component of stakeholder management and an important aspect of risk management for a project. Projects may have a range of potential adverse impacts to people and the environment in general, identifying grievances and ensuring timely resolution is therefore very necessary. As such the project has developed a grievance management process to serve as a guide during project implementation.

The Land Acquisition Tribunal established under the Land Act 2012 (Part VIIIA 133A) has the jurisdiction to hear and determine appeals from the decision of the NLC on the process of compulsory land acquisition of land. However, if a party is dissatisfied by the decision of the tribunal, they may appeal to the Environment and Land Court. The court will deal with land related disputes. However, the Land Act 2012 and Environment and Land Court Act 2011 advocates for Alternative Dispute Resolution (ADR) methods in tackling land related disputes. ADR approaches will be given preference and based on customary rules, arbitration, or third-party mediation. ADR will be promoted or defended as a resolution to disputes related to land. The affected persons and other stakeholders also have a right to access the World Bank Redress Service (GRS) and the World Bank Inspection Panel at no cost.

7.6.10.2 Grievance Redress Principles

The principles of grievance mechanism management that need to be observed include;

- All complaints and grievances are resolved as quickly as possible.
- That the resolution of complaints and grievances should be at the lowest possible level for resolution.
- All complaints that can be resolved, should be resolved immediately on the site. The focus of the GRM is to resolve issues in a customarily appropriate fashion at community level and record details of the complaint, the complainant and the resolution.

7.6.10.3 Grievance Redress Committee Capacity Building

A grievance redress mechanism and a committee were established in a culturally appropriate manner in consultation with the community during the consultations for ESIA and will be utilized post ESIA. The GRM committee will have the following roles; log the grievances, maintain records of the GRC meetings and grievances, resolve the grievances to the extent possible.

7.6.10.4 Grievance Procedures

a) *Registration* - Community members can inform the contractor about concerns directly and if necessary, through third parties. Once a complaint has been received, it will be recorded in a complaints log or data system. The log will be kept in hardcopy or electronic form. All reported grievances will be categorized, assigned priority, and routed as appropriate.

7.6.10.5 Grievance Log

The grievance logbook will ensure that each complaint has an individual reference number, and is appropriately tracked and recorded actions are completed. The information to be recorded will include:

- Name, age, gender of complainant;
- Date the complaint was reported;
- Date the grievance logged;
- Action taken;
- Date information on proposed corrective action sent to complainant (if appropriate);
- The date the complaint was closed; and
- Date response was sent to complainant.

b) *Sorting and Processing* - This step determines whether a complaint is eligible for the grievance mechanism and its seriousness and complexity. The complaint will be screened however this will not involve judging the substantive merit of the complaint. The following guide will be used to determine whether a complaint is eligible or not: Eligible complaints may include those where:

- The complaint pertains to the mini-grid project.

- The issues raised in the complaint fall within the scope of issues the grievance mechanism is authorized to address.

Ineligible complaints may include those where:

- The complaint is clearly not mini-grid project -related.
- The nature of the issue is outside the mandate of the grievance mechanism.
- The complainant has no standing to file.
- Other project or organizational procedures are more appropriate to address the issue.
- Closing Out and Escalation: Project-related grievances will be addressed and closed out as appropriate. The GRM will provide a channel for escalation e.g., through legal redress.

The proponent REREC will monitor the activities of the stakeholder engagement and grievance management activities.

The three tiers if the GRM are as described below:

7.6.10.6 National Grievances Redress Committee (NGRC)

NGRC has been established at the National level to ensure participatory and transparent implementation of the project. The NGRC will help the project carry out its mandate efficiently- particularly ensuring effective and amicable settling of disputes among the communities/PAP's.

Members to **NGRC** include representation from the following agencies and entities

1. Representative from the Ministry, chair of the Committee
2. Representative from NLC to handle matters that involve land take
3. Representative of the Implementing Agencies (IA)-KPLC and REREC
4. Representative from the Ministry's Legal office to guide on Alternative Dispute Resolution methods
5. Representative from the County Grievance Redress Committee-depending on the matter at hand; Land or Environment
6. Representative from Gender and Social Development Office who will be responsible for ensuring gender issues are well addressed.
7. Representative from NEMA to handle environmental issues
8. County Surveyor/Physical planner from the county Lands office
9. Project Affected Person's-to represent the matter before the committee

7.6.10.6.1 Functions of the National Grievances Redress Committee

- a) Ensuring effective flow of information between PAPs, the implementing agency and the County Grievance Redress committee on matters brought before the committee
- b) Co-ordinate County Grievance Redress Committees (CGRC)
- c) Co-ordinate activities between the various organizations involved; facilitate grievance and conflict resolution at the highest level
- d) Resolving disputes that may arise within the project. If it is unable to resolve any such problems, the PAP's can seek legal redress.

7.23.10.1 County Grievance Redress Committees (CGRC)

CGRC has been established at the county level to ensure participatory and transparent implementation of the project. The CGRC will help the project carry out its mandate efficiently- particularly ensuring effective communication with the communities.

Members to **CGRC** will include representation from the following agencies and entities

1. Representative of NLC, to grant legitimacy to the acquisition process and ensure that legal procedures as outlined in Land Act 2012
2. Representative of the implementing agency
3. Representative of NEMA to handle environmental issues
4. The County Administration representative, which will provide the much-needed community mobilization, and support to the sub-project.
5. County Land Survey Officer will survey all affected land and produce maps.
6. The County Gender and Social Development Officer who will be responsible for ensuring gender programs are adhered to.
7. The County Lands Registrar will verify all affected land and validate the same.
8. Two PAP representatives from Location Grievance Resettlement Committee – act as voice for the PAPs
9. NGOs and CBOs locally active in relevant fields

The CGRC will have the following **specific responsibilities:**

- a) Ensuring effective flow of information between PAPs and the implementing agency
- b) Coordinate Locational Grievance Redress Committees (LGRC)
- c) Coordinate activities between the various organizations involved; facilitate grievance and conflict resolution; and provide support and assistance to vulnerable groups.
- d) Conducting extensive public awareness and consultations with the affected people so that they can air their concerns, interests, and grievances.
- e) Resolving disputes that may arise within the project. If it is unable to resolve any such problems, channel it to the National Grievance Redress committee before utilizing the appropriate formal grievance procedures.

7.23.10.2 Locational Grievance Redress Committee (LGRC)

Since counties are large, further decentralized Grievance Redress Committee will be formed at the location of the sub-project. Subsequently, Locational Grievance Redress Committees (LGRC's), based at each location of a sub-projects, will be established. The LGRC's will be constituted by implementing agencies and representatives of CGRCs through consultation with the PAPs and will act as the voice of the PAPs.

The LGRCs will work under guidance and coordination of CGRC and the implementing agencies. Their membership will comprise of the following:

1. The locational Chief, who is the Government administrative representative at the locational unit and who deals with community disputes will represent the Government in LGRC
2. Assistant Chiefs, who supports the locational Chief and Government in managing local community disputes in village units will form membership of the team.
3. Female PAP, elected by women PAPs, will represent women and children related issues regarding the project

4. Youth representative, elected by youths, will represent youth related concerns in the LGRCs
5. Male representatives elected by the members of the PAPs
6. Vulnerable persons representative will deal and represent vulnerable persons issues in the LGRCs.
7. CBO representatives

Membership of LGRCs will be elected by each category of PAPs except the locational Chief and assistant chiefs who will be automatic members of the team by virtue of their positions. Each of LGRCs will elect their own chairperson and a secretary among themselves.

The roles of LRCCs will include among others the following:

- a) Conducting extensive public awareness and consultations with the affected people.
- b) Help ensure that local concerns raised by PAPs as regards to the project are promptly addressed by relevant authorities.
- c) Resolve manageable disputes that may arise relating to the project. If it is unable to resolve/help refer such grievances to the CGRCs instituted.
- d) Ensure that the concerns of vulnerable persons such as the disabled, widowed women, orphaned children affected by the sub project are addressed.
- e) Assist the community in recording grievances, including helping those who cannot write or read.
- f) Help the vulnerable groups access project benefits
- g) Ensure that all the PAPs in their locality are informed about the project

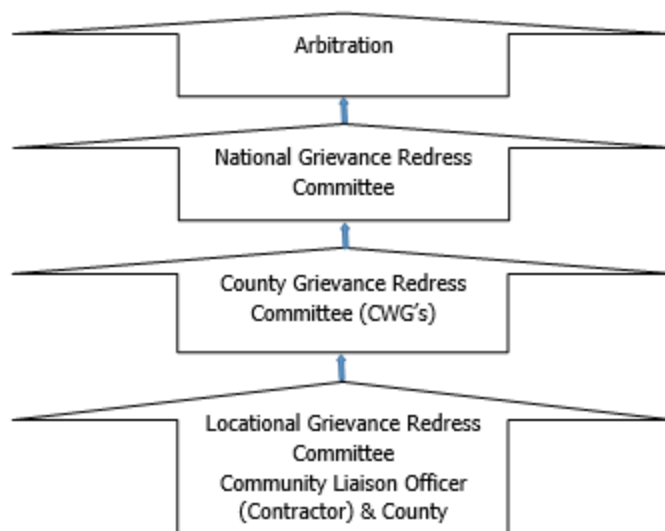


Figure 7-1: KOSAP Grievance Redress Mechanism

It should be noted that if complainants are not satisfied with the grievance process, even after arbitration they have the right to present their complaint through the court system.

It is expected that most disputes will be resolved at the lowest level- Locational Grievance Redress Committee and since most disputes arise during the Construction

and operation period the contractor's Environmental and Social Safeguard team specifically the Community Liaison Officer will work closely with the community to be able to resolve disputes.

Responsibilities of the Community Liaison Officer include:

- Monitor day to day Implementation of the Project
- Address grievances as they arise on the project
- A member of the Locational and County Grievances Redress Management Committee to respond on issues that may have been brought to the attention of the committee before escalating to the National Grievance Redress Committee
- Escalate grievances internally to get a lasting solution

7.6.10.9 Existence of a Local Grievance Redress Mechanism in Nachukui

A Local grievance redress committee was constituted in 2020. The LGRM was not active during the site visit. It is anticipated that the committee shall become active during the construction and operation phase of the project. The LGRM is composed of the following members of the project committee:

1. The area chief;
2. Youth representatives;
3. Female representatives;
4. Male representative; and
5. Vulnerable persons representative

Contractor will prepare an effective Grievance Redress Mechanisms (GRM) to address and respond to grievances from both the community, the workers and any other stakeholder.

A Grievance Redress Mechanism (GRM) provides access to remedy and identifies procedures to effectively address grievances arising from project implementation. GRM provides an avenue where people can formally lodge their complaints and grievances and have them properly considered and addressed.

The mitigation measures shall include:

- Prepare a project level timebound GRM in consultation with relevant stakeholders
- Ensure the project GRM incorporates existing local dispute resolution mechanisms at the lowest tier and allows access to administrative and judicial processes as well as to other redress mechanisms such as meditation/arbitration and the World Banks grievance redress service (GRS) and the Inspection Panel
- Have a subproject level GRM Focal Point to be responsible for receiving, logging/registering, submitting to the responsible tier for resolution and responding to and updating complainants on resolution status
- Sensitize all stakeholder categories on the GRM and encourage them to make use of it
- Ensure the GRM is functional, culturally appropriate, and accessible to all stakeholders without any cost to them and without fear of retribution or reprisal
- Ensure adequate and proportionate representation of VMGs and vulnerable individuals in the local grievances handling committee.
- Prepare a timebound Contractor's GRM and sensitize community members and project workers its processes

- Ensure all reported grievances are logged, dated, processed, resolved and closed out in a timely manner, or escalated to other levels.
- Ensure the GRM provides for confidential reporting of particularly sensitive social aspects such as GBV, as well as anonymity for those who wish to report anonymously.

7.23.10.3 World Bank Grievances Redress Mechanism

The World Bank has established 2 grievance redress mechanisms that provide avenues for individuals and communities to submit complaints directly if there is belief that they have been, or are likely to be, adversely affected by a World Bank-funded project. In this project PAPs and other stakeholders have the right to know and access at no cost these GRMs as described below.

7.23.10.3.1 World Bank Grievances Redress Service

The Grievance Redress Service (GRS) is an avenue for individuals and communities to submit complaints directly to the World Bank if they believe that a World Bank-supported project has or is likely to have adverse effects on them, their community, or their environment. The GRS enhances the World Bank's responsiveness and accountability to project-affected communities by ensuring that grievances are promptly reviewed and addressed. Complaints must be in writing and addressed to the GRS and sent through the following methods namely:

Those aggrieved or their representatives can report their complaints through the following mediums;

- (i) Online by accessing the online form;
- (ii) Sending an Email to grievance@worldbank.org; or
- (iii) Submitting a letter to the World Bank Headquarters in Washington D.C., United States or World Bank Kenya County Office.

7.23.10.3.2 World Bank Inspection Panel

The Inspection Panel is an independent complaints mechanism for people and communities who believe that they have been, or are likely to be, adversely affected by a World Bank-funded project. The Panel is an impartial fact-finding body, independent from the World Bank management and staff, reporting directly to the Board. The Inspection Panel process aims to promote accountability at the World Bank, give affected people a greater voice in activities supported by the World Bank that affect their rights and interests, and foster redress when warranted. In September 2020, the Board updated the resolution that created the Panel and added to the Panel functions. At the same time, the Board approved a resolution establishing the World Bank Accountability Mechanism (AM). The new AM began operations in early 2021 and houses the Panel to carry out compliance reviews and a new Dispute Resolution Service (DRS), which will give complainants another way to have their concerns addressed. Contacts for registration of complaints to the IPare ; (i) Tel:+12024585200: and (ii) Email: ipanel@worldbank.org.

7.23.10.3.3 Government Management of Land Acquisition Disputes

The Environment and Land Court, established under the Environment and Land Court Act 2011, is a superior court (with offices across the country) that hears and determines disputes relating to land and the environment. Likewise, the Land

Acquisition Tribunal established under the Land Act 2012; (PART VIIIA 133A) has jurisdiction to hear and determine appeals from the decision of the NLC on the process of compulsory acquisition of land. Therefore, in the first instance, such appeals are referred to the Tribunal. However, a party dissatisfied with the decision of the Tribunal may appeal to the Environment and Land Court on a question of law only. The regulations to set the Land Acquisition Tribunal established under the Land Value (Amendment) Act of 2019 are underway. Besides, the Judicial Service Commission will chair the Land Acquisition Tribunal once operational.

7.24 STAKEHOLDER ENGAGEMENT AND GRIEVANCE MANAGEMENT POST ESIA

During implementation of the project or construction phase, stakeholder engagement will be progressed to ensure the community and other stakeholders are kept abreast of the progress of the project. For the target community this will take the form of meetings and focus group discussions between local community and the contractor which will also act as forums for the community to ask questions or provide feedback. Therefore, the contractor will prepare a stakeholder engagement plan to guide on the engagements with various stakeholders guided by the Stakeholder Engagement Plan prepared during ESIA.

7.24.1 Objectives and Principles of Stakeholder Engagement post ESIA

Stakeholder engagement is the basis for building strong, constructive, and responsive relationships that are essential for the successful management of a project's environmental and social impacts.

In order to ensure effective engagement and consultation of all stakeholders, the contractor and the proponent will apply the following principles.

- Ensure the affected persons are provided opportunities to express their views on project risks, impacts and mitigation measures, and response provided.
- Begin consultations early even before construction begins because there is a lapse of time between ESIA consultations and implementation time. Identification of environmental and social risks and impacts should continue on an ongoing basis as risks and impacts arise.
- Consultations should continue in a manner that is transparent, objective, meaningful and allow for ease in accessing information in a culturally appropriate local language(s) and format that is understandable to affected and interested persons.
- Consultations with affected persons and interested parties should avoid manipulation, interference, coercion, or intimidation.
- Consultations should also pay attention to the needs of VMGs, vulnerable individuals and households.

The contractor shall identify the stakeholders early and consider appropriate methods for engaging them. The stakeholder engagements will be reported to REREC on monthly basis alongside the construction progress reports.

8 IMPACT SUMMARY AND CONCLUSION

8.1 INTRODUCTION

This chapter gives a summary of impacts conclusion and recommendations

8.2 SUMMARY OF IMPACTS IDENTIFIED AND ASSESSED

8.2.1 Construction Phase Impacts

A number of impacts have been identified as a result of the construction of the proposed Nachukui project. Of these, impacts on employment, procurement and the economy have been determined to be positive.

The significance of the identified negative impacts associated with the construction phase is moderate prior to the application of appropriate mitigation measures. The significance of two of the identified negative impacts associated with the construction phase, specifically: impacts related to labour and working conditions and visual impacts are minor prior to the application of appropriate mitigation measures. With the application of appropriate mitigation measures, the significance of all the identified negative impacts associated with the construction phase will be reduced to minor or negligible.

8.2.2 Operational Phase Impacts

A number of impacts have also been identified to be associated with the operational phase of the proposed Nachukui solar project. Of these impacts, four (collectively referred to as Impacts on Employment, Procurement and the Economy) will be positive impacts. Prior to the application of appropriate mitigation measures, none of the identified negative impacts will be of major significance during the operational phase. The presence of electrical infrastructure will pose this health threat to avifauna prior to the application of appropriate mitigation measures. Four of the negative impacts are of minor significance before the application of appropriate mitigation measures. These include: impacts on water quality; health, safety and security and visual impacts.

With the application of appropriate mitigation measures, the significance of all the identified negative impacts associated with the operational phase will be reduced to MINOR or NEGLIGIBLE

8.3 SA AND VMGP CONCLUSION

The Nachukui project has triggered the World Bank Operational Policy (OP 4.10) for Indigenous Peoples due to the known presence of indigenous peoples (IPs)/vulnerable and marginalized groups (VMGs) at the project area. Nachukui area is overwhelmingly IP/VMG area and is inhabited predominantly by the Turkana and the minority tribes include; Kalenjin, Somali, Luhya, Luo, Congolese. This is addition to The Kenya Constitution requirement to protect and promote the interests and rights of minorities and marginalized communities and the relevant laws and regulations of the Government of Kenya concerning VMG (Vulnerable and Marginalized Groups). The OP 4.10 Indigenous Peoples contributes to the Bank's mission of poverty reduction and sustainable development by guaranteeing that the development process fully takes due regard to the dignity, human rights and cultures of indigenous people. The Bank requires that the Borrower engage the IPs/VMGs in a process of Free, Prior and Informed

Consultations. This was the basis of the public participation done in Nachukui Centre on 14th January 2022 in Nachukui involving all the communities in the area which resulted in broad community support for the project by the affected IPs/VMGs. During the ESIA study the community members further identified members of the community they consider vulnerable by the community member. The vulnerable were identified to include;

- Widows-approximately 70
- Orphans –approximately 300
- Persons Living with Disabilities- Approximately 50
- The elderly (80 years and above)- approximately 150

8.4 CONCLUSION AND RECOMMENDATIONS




Before implementation of the project, environmental and social impact assessment has been undertaken to fulfil the legal requirements, obtain background biophysical information of the site, assess and predict the potential environmental and social impacts and associated mitigation measures during the project cycle, suggestions of possible alterations to the proposed design based on the assessment findings were made, public and stakeholder consultation and participation was undertaken, an environmental and social management plan (ESMP) and monitoring plan were developed. The project has been guided by World Bank safeguards regulations and EMCA 1999 (*amended 2015*). During the ESIA various stakeholders including VMGs were consulted, and their views incorporated in the report.

The proponent/contractor to consult all relevant service providers and authorities (i.e., County Administrators, NEMA, amongst others) to harmonize the projects infrastructural and socio-economic developments with existing facilities.

It is recommended that during the project cycle the proponent and contractor shall adhere to ESMP to minimize risks and delays that may occur. This shall also reduce the cost of the project in the long run. It is also suggested that the positive impacts that emanate from such activities shall be enhanced as much as possible.

Lastly, this CPR to be cleared and approved by WB while the National Environment Management Authority (NEMA) to issue ESIA license subject to annual environmental audits after operating for one year. It is recommended that an Environmental Audit (EA) be undertaken annually.

APPENDIX 1 – PUBLIC MEETING PARTICIPANTS’ REGISTER



ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES.

Venue: *Narok* *BARAZA*
 Date: *15/01/2023*

Time: *11:00 AM*

List of Participants

#	Name	Position/Institution/Location	Phone No.	Signature
1.	<i>Solomon KamBen</i>	<i>Fourth</i>		<i>[Signature]</i>
2.	<i>KouAbonyo Kod.</i>	<i>extension</i>		<i>[Signature]</i>
3.	<i>Phael Enoi</i>	<i>Business lady</i>		<i>[Signature]</i>
4.	<i>element lolem</i>	<i>Teacher</i>		<i>[Signature]</i>
5.	<i>Amekui David</i>	<i>HOUSE WIFE</i>		<i>[Signature]</i>
6.	<i>MIMI CHARLES</i>	<i>HOUSE WIFE</i>		<i>[Signature]</i>
7.	<i>CHARLES LOPODO</i>	<i>ELDERS</i>		<i>[Signature]</i>
8.	<i>EPHATHA ABEL</i>	<i>YOUTH</i>		<i>[Signature]</i>
9.	<i>MEIAN PAUL</i>	<i>Business Man</i>		<i>[Signature]</i>
10.	<i>SAM EKURAIT</i>	<i>PASTOR</i>		<i>[Signature]</i>



Ministry of Energy

ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES.

Venue: Nakuru BARAZA BARAZA


Date: 15/11/2021

Time: 11:45 Am

List of Participants

#	Name	Position/Institution/Location	Phone No.	Signature
1.	AKABU Peter Ndika	H/W Nakuru		
2.	ANNA KOKWAREN	H/W Nakuru	N/A	
3.	SARANTA KROT	H/W Nakuru	N/A	
4.	ETABO LOMAKAT	Nakuru	N/A	
5.	MUKACHEA XWEN	ELDEN Nakuru	N/A	
6.	DOYSEE EK. OOR	SECURITY Nakuru	070461118	
7.	PETERA EUBENHO	EXTENSION Nakuru	0703719052	
8.	EREE KOTANJURE	FISHERMAN Nakuru		
9.	ERAT LOYHAL	FISHERMAN Nakuru		
10.	ELAL CHARUKI	ELDEN Nakuru	0716065946	

ASSISTANT DIRECTOR GENERAL
 LAZARUS NACHIRI
 P O BOX 10000
 NAIROBI
 SIGNED: [Signature]
 P O BOX 10000
 NAIROBI





Ministry of Energy

ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES.


Venue: MACHAKOS DISTRICT OFFICE

Date: 18/01/2022

Time: 11:45AM

List of Participants

#	Name	Position/Institution/Location	Phone No.	Signature
1.	Michael Kocha	York	0748309029	<i>[Signature]</i>
2.	Akan Kochack	HM	N/A	<i>[Signature]</i>
3.	Joyce Awar	HM	N/A	<i>[Signature]</i>
4.	Erin Mwakimbi	HM	N/A	<i>[Signature]</i>
5.	Mary MacHann	HM	N/A	<i>[Signature]</i>
6.	Paulina Ruzare	HM	N/A	<i>[Signature]</i>
7.	Munday Atesa	HM	N/A	<i>[Signature]</i>
8.	Nancy Sijamal	HM	N/A	<i>[Signature]</i>
9.	Rebecca Agua	HM	N/A	<i>[Signature]</i>
10.	Harlen Aretet	HM	N/A	<i>[Signature]</i>






ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES.

Venue: Machakos
 Date: 15/01/2022

Time: 11:45AM

List of Participants

#	Name	Position/Institution/Location	Phone No.	Signature
1.	MARY JOKOBI	TORTIT	N/A	Mary
2.	James Longet	H/W	N/A	James
3.	NA TOST WATUBU	H/W	N/A	NA TOST
4.	CAROLINE KUSOM	H/W	N/A	Caroline
5.	KARENLE EUGEN	H/W	N/A	Karenle
6.	HESTER SAMATI	H/W	N/A	Hester
7.	EVURAL LOBVIN	PASTORIST	N/A	Evural
8.	AIIIE EMMEN	H/W	N/A	AIIIE
9.	Abilon Mercy	H/W	070111834969	Abilon
10.	KOCTANUS KAR	H/W	072009195292	KOCTANUS





Ministry of Energy

ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES.

Venue... NACHUKU DISTRICT
Date... 15.10.2022

Time... 11:45 am

List of Participants

#	Name	Position/Institution/Location	Phone No.	Signature
1.	JOHN KOKORO	Fisherman	071 0112316768	<i>[Signature]</i>
2.	JOHN LEMEST	Rulu Man	N/A	<i>[Signature]</i>
3.	DORCAS ARI	HM	071 071809599694	<i>[Signature]</i>
4.	JOYCE KLEISON	HM	N/A	<i>[Signature]</i>
5.	SUSAN AKUMON	HM	N/A	<i>[Signature]</i>
6.	DORCAS EYMAE	HM	N/A	<i>[Signature]</i>
7.	ANUS ECHODAE	HM	N/A	<i>[Signature]</i>
8.	Juddy familyo	HM	N/A	<i>[Signature]</i>
9.	HELEN LOMODO	HM	N/A	<i>[Signature]</i>
10.	MURSI AYEEST	HM	N/A	<i>[Signature]</i>





Ministry of Energy

ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES.

Venue: NACHUKU


Date: 15/01/2021

Time: 11:48am

List of Participants

#	Name	Position/Institution/Location	Phone No.	Signature
1.	FRANCIS MARIU	Business Man		
2.	EMILY LEEST	Chairman	0169102774	
3.	MARILYN LORAN	SECURITY	0791654989	
4.	DOMINIC FEELA	PASTORIST		
5.	SARISON MOTALA	PASTORIST		
6.	SIMON MURTON	Pastor		
7.	FOSYKO MUBIN	PASTORIST		
8.	JONATHAN EMOONYA	FISHERMAN		
9.	BONEX NALYO	YOUTH CHAIRMAN	0751349029	
10.	REIDAN ATARAT	ADJUTANT	0718773701	

ASS CHIEF
LAZARUS ERING
NACHUKU
15 JAN 2021
P O BOX 1, LOKITILING





ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES.


Venue: NACTYKO BARAZA
 Date: 15.01.2024

Time: 11:48am

List of Participants

#	Name	Position/Institution/Location	Phone No.	Signature
1.	Aber ELIZABETH	House wife		<i>[Signature]</i>
2.	Mwacy LOSEON	Youth		<i>[Signature]</i>
3.	Akiku MATINDAGE	Housewife		<i>[Signature]</i>
4.	SIMON EKIVEN	Fisherman		<i>[Signature]</i>
5.	Jordan JUMARI	Fisherman		<i>[Signature]</i>
6.	IGATA EKAI	Youth		<i>[Signature]</i>
7.	MUKYELINDI LOTINI	House wife		<i>[Signature]</i>
8.	PAULINA KEREET	House wife		<i>[Signature]</i>
9.	ESTHER NYUA	House wife		<i>[Signature]</i>
10.	Mwacy TOMILIS	Youth		<i>[Signature]</i>

Sign P O
 15 JAN 2024
 BOV 110KITAUNG





Ministry of Energy and Petroleum



ENVIRONMENTAL IMPACT ASSESSMENT PROJECT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES

Venue: NACTUKU BURKATA

Date: 15/01/2022

List of Participants

Time: 10:48am

#	Name	Position/Institution/Business/Location	Gender M/F	Phone No. or ID No.	Signature
1.	Napak Peter Mubang	Nakuru	M	0721682691	
2.	Jughack Kapsang Bar	KOSAP EST (Norken Ltd)	M	0725600810	
3.	Joyis Komen	"	F	0719183213	
4.	Yvonne O. Heli	"	F	0795023964	
5.	Allan Oziro	CENTRIC AFRICA LTD -SS2	M	0721224875	
6.	Colob Fwoti	KOSAP - CREO	M	0714971688	
7.	Kennedy O.S. Shirika	MoE - SFRU	M	0722591628	
8.					
9.					
10.					
11.					
12.					
13.					
14.					

ASS CHIEF
LAZARUS EPAE ERENG
NACHIONI
STATION
15 JAN 2022
SIGN
P O Box 1, LOKITAUNG





ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES.

Venue: Nairobi Parklands
 Date: 15/01/2023


Time: 11:45 AM

List of Participants

#	Name	Position/Institution/Location	Phone No.	Signature
1.	ESTHER LOCHUKAE	Business Lady	0799347358	
2.	ROSELINE KAMENYE	CHARITABLY	0708367933	
3.	ROSELINE KIRIATE	HOUSEWIFE		
4.	PETER LOTANAE	SECURITY	0728380734	
5.	SATH ENUEIA	BUSINESS MAN		
6.	NANCY COCHO	HOUSE WIFE		
7.	DISII LOKELIS	HOUSE WIFE	15 JAN 2023	
8.	PAOLA TOMARINDA	HOUSE WIFE		
9.	RETHUR LOTUKO	YOUTH		
10.	BENSON KAPORIE	YOUTH (Electrical Technology)	0740931612	

Sign P O Box 1, LOKITANG

ASS CHIEF LAZARUS EPAL ERENG MACHIRI





Ministry of Energy

ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES.

Venue: NATOKI PAKAZI
Date: 15/01/2024


Time: 11:45 Am

List of Participants

#	Name	Position/Institution/Location	Phone No.	Signature
1.	BENJAMIN EPOO	YOUTH	0745505295	
2.	JUCCAS NIKUMBI	Fisherman	0297199981	
3.	KIMAT EDUANI	Fisherman	N/A	
4.	PAUL MUKAMANI	Revenue officer	-	
5.	ROSE AKATI EROOT	Business woman	0707595323	
6.	MANT MUAETOM	HLW	N/A	
7.	SHANTA BRITTE	Business lady	0715574082	
8.	ATTON ESENGU	HLW	N/A	
9.	ELIZABETH KIMYEN	HLW	0749330489	
10.	NATOKI ESENGU	HLW		



SIGNATURE
P O Box 1, LOKITAUNG





ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES.

Venue: Nakuru
Date: 15.11.2022

Time: 11:45 Am

List of Participants

#	Name	Position/Institution/Location	Phone No.	Signature
1.	<u>KLAT</u>	<u>HLW</u>	<u>-</u>	<u>[Signature]</u>
2.	<u>NKATULU</u>	<u>HLW</u>	<u>-</u>	<u>NKL</u>
3.	<u>Benson</u>	<u>YOUTH</u>	<u>0705491112</u>	<u>[Signature]</u>
4.	<u>Kobe</u>	<u>YOUTH</u>		<u>[Signature]</u>
5.	<u>Sottal</u>	<u>SECURITY</u>	<u>0717849177</u>	<u>[Signature]</u>
6.	<u>SVLY</u>	<u>-</u>		<u>[Signature]</u>
7.	<u>ETABO</u>	<u>FISHERMAN</u>	<u>0745131637</u>	<u>[Signature]</u>
8.	<u>AJOKINO</u>	<u>YOUTH</u>	<u>075214324</u>	<u>[Signature]</u>
9.	<u>NEBY</u>	<u>YOUTH</u>	<u>0703779506</u>	<u>[Signature]</u>
10.	<u>Thomas</u>	<u>EXTRECHIST</u>	<u>0745479382</u>	<u>[Signature]</u>



Sign: 15.11.2022
P O Box 1, LOKITAUUNG



Ministry of Energy

ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES.

Venue: Machakos BARAZA

Date: 15/01/2021


Time: 11:48 Am

List of Participants

#	Name	Position/Institution/Location	Phone No.	Signature
1.	STABO INOK	House Wife		<i>[Signature]</i>
2.	MARGARET LOPOGOTI	House wife		<i>[Signature]</i>
3.	MARANI MEREDE	YOUTH		<i>[Signature]</i>
4.	EDDIE MBERENE	YOUTH		<i>[Signature]</i>
5.	SARIFA ADIPE	HOUSE WIFE		<i>[Signature]</i>
6.	URIEN - MULO	HOUSE WIFE		<i>[Signature]</i>
7.	MARLINTON KINER	YOUTH.		<i>[Signature]</i>
8.	CYTHIA EKUAM	YOUTH		<i>[Signature]</i>
9.	ERONKA FORTAKERE	YOUTH		<i>[Signature]</i>
10.	ENOK LOSEKON	Fisherman		<i>[Signature]</i>

Sign: *[Signature]*
 PO Box 4, LOKITAUUNG

LAZARUS EPAE ERENG
 NACHIRI, SUB-COMMISSIONER
 15 JAN 2021





Ministry of Energy

ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES.

Venue: NAKURU BARRAZA
Date: 15.01.2023


Time: 11:45AM

List of Participants

#	Name	Position/Institution/Location	Phone No.	Signature
1.	JOSEPH NANTAKHA	Housewife	N/A	JN
2.	JOHN ISSUKU	FARMER		JN
3.	JOSEPH KIRO	TOURIST		JN
4.	LUCAS EINTON	TEACHER		JN
5.	NANDEKIO EINTON	HM		JN
6.	ERUKUJI LOKOROR	SECURITY		JN
7.	MARK EKULEU	Reverend		JN
8.	JOSEPH EINTON	Pastor	0716819691	JN
9.	LOTAARU IKAM	Pastor		JN
10.	IKAM IKAM	Pastor		JN

Sign.
 P O Box 1, LOKITAUNG

ASS CHIEF
 LAZARIUS EINTON
 MACHINDI DISTRICT CREATION





Ministry of Energy

ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES.

Venue... NATHUKU BARAZA
Date... 15.12.2022


Time... 11:48 AM

List of Participants




#	Name	Position/Institution/Location	Phone No.	Signature
1.	JOSEPH EDHAT	FASTEROST NATHUKU		JE
2.	SAMUEL NANTANYA	YOUTH NATHUKU	0115599220	SN
3.	ATAFAR LOKEIS	H/W		AL
4.	AMBERX LORTANLICE	H/W		AL
5.	PURTY EKAL KONO	YOUTH	0711403104	PK
6.	PAUL MACHARIA	CARPENTER		PM
7.	RODRIK LORTON	H/W		RL
8.	ROBERT LOMO	FISHERMAN	0745119864	RL
9.	XBVA EWESIT	H/W		XB
10.	EROSO EKAL	FISHERMAN		ER

ASIS CHIEF
LAZARUS EWESIT
NATHUKU
15.12.2022

Sign...
P O Box 1, LOKITAUNG



APPENDIX 2 – MEN FGD LIST OF ATTENDANCE

ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES.

Venue: Nakuru
Date: 28.01.2018

Time: 11:00 am

List of Participants

#	Name	Position/Institution/Location	Phone No.	Signature
1.	RITAB NARAK	Elder, Muthuri	N/A	<i>[Signature]</i>
2.	PETER NARAC	VILLAGE ADMIN PLWD	0721 682692	<i>[Signature]</i>
3.	JOSEPH EKAT EBEL	ELDER NACHUKU 1	0716 065946	<i>[Signature]</i>
4.	Simon Kipy Sokaliban	ELDER NAKHUKU 1	0798223585	<i>[Signature]</i>
5.	NARVAL BOGIEDY	ELDER NAKHUKU 2	N/A	<i>[Signature]</i>
6.	SAMSON EKURU	ELDER NAKHUKU 2	0701 014307	<i>[Signature]</i>
7.	JOSEPH NABUN	ELDER NAKHUKU 1	070874 6287	<i>[Signature]</i>
8.	Imjout Atal	ELDER NAKHUKU 1	N/A	<i>[Signature]</i>
9.	TOMAS NANESEK	CATECHIST NAKHUKU 2	0745 479382	<i>[Signature]</i>
10.	MEKEDE DOMINIKTA	ELDER NAKHUKU 1	0715 079212	<i>[Signature]</i>



Ministry of Energy

ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES.


Venue: Natchukul
Date: 25/01/2018

PCID man




Time: 11:45 a.m

List of Participants

#	Name	Position/Institution/Location	Phone No.	Signature
1.	NICHOLAS ERENGI EBOT	ESBER NATCHUKUL	ADD	Nud
2.	EMMALE JOYAL	ESBER NATCHUKUL	N/A	Emmale Joyal
3.				
4.				
5.				
6.				
7.				
8.				
9.				
10.				



APPENDIX 3 – YOUTH FGD LIST OF ATTENDANCE



ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES.

Venue: *Nashole*
 Date: *1st Feb 2019*
 Time: *11:45 Am*

FGD (Male)
10 bottles

List of Participants

#	Name	Position/Institution/Location	Phone No.	Signature
1.	MILLIAM ABEAIO	WATERMAN (Hospital)	0709718615	<i>[Signature]</i>
2.	JOHN EPERET	?	0715635497	<i>[Signature]</i>
3.	ABENA MEXODO	WATERMAN (Hospital)	0769253384	<i>[Signature]</i>
4.	PETER ENYEN	Redman	0701011472	<i>[Signature]</i>
5.	JAMES NKATOTIN	AMSON	0748623883	<i>[Signature]</i>
6.	MOSES CHODOWAZI	Pastor	0727313106	<i>[Signature]</i>
7.	JOHN KOTIRO	Fisherman	0792452598	<i>[Signature]</i>
8.	PETER NABO	Fisherman	N/A	<i>[Signature]</i>
9.	SIMON ENYATE	Fisherman	N/A	<i>[Signature]</i>
10.	GABRIEL ENYATE	Fisherman	0745473242	<i>[Signature]</i>



Ministry of Energy and Petroleum



Youths (Machakos) MALE

ENVIRONMENTAL IMPACT ASSESSMENT PROJECT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES


Venue: MACHAKOS

Date: 18.11.2022

Time: 11:45am

List of Participants

#	Name	Position/Institution/Business/Location	Gender M/F	Phone No. or ID No.	Signature
1.	<u>REANA ATTE</u>	<u>M/F</u>	<u>F</u>		<u>[Signature]</u>
2.					
3.					
4.					
5.					
6.					
7.					
8.					
9.					
10.					
11.					
12.					
13.					
14.					



APPENDIX 4 – WOMEN FGD LIST OF ATTENDANCE






FAD Pwani Co.

ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES.

Venue: Wajir
 Date: 15.01.2022

Time: 11:45

List of Participants

#	Name	Position/Institution/Location	Phone No.	Signature
1.	Concepha Bringer	H/W	0718165831	
2.	Susan Akar	H/W	N/A	
3.	AKHARIE KAMURAN	H/W	N/A	
4.	KILIKILE EKSON	H/W	N/A	
5.	Joyce Buman	H/W	N/A	
6.	Amam Agnes	H/W	N/A	
7.	ALICE AKAO	H/W	N/A	
8.	ANNA AKAI	H/W	N/A	
9.	WENDY AKAI	H/W	N/A	
10.	AKAI KININ	H/W	N/A	



Norken International Ltd
KOSAP PROJECT



CENTRIC
AFRICA LTD



**ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED K/T
GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTY**


Venue: *Nairobi*
Date: *15/11/2022*

PCD Office

Time: *11:45*

List of Participants

#	Name	Position/Institution/Location	Phone No.
1.	<i>Reynolds KITE</i>	<i>HM</i>	<i>N/A</i>
2.	<i>Mary Batoro</i>	<i>HM</i>	<i>N/A</i>
3.	<i>Mary EZARA</i>	<i>HM</i>	<i>N/A</i>
4.	<i>ROSEMARY Njoroge</i>	<i>HM</i>	<i>07909710840</i>
5.	<i>Rebecca Njiru</i>	<i>Chair lady child fund</i>	<i>0725412638</i>
6.	<i>AUA EMEWU</i>	<i>HM</i>	<i>N/A</i>
7.	<i>ROSEMARY AKIROU</i>	<i>HM</i>	<i>N/A</i>
8.	<i>ROTE KINYANKI</i>	<i>HM</i>	<i>N/A</i>
9.	<i>MOROLAN EROT</i>	<i>HM</i>	<i>N/A</i>
10.	<i>Alexis Kibulo</i>	<i>HM</i>	<i>N/A</i>



APPENDIX 4 – FIRST MEETING MINUTES/LAND ACQUISITION MEETING

Minutes of Community consultation meeting

Minutes of the community consultation meeting held on 13/03/2021 at Nachukui market centre

AGENDA

- Public forum: Welcoming and opening remarks
- Project information: KOSAP and the Nachukui mini grid
- Project Land requirements: Disclosure of community rights and entitlements to compensation, the options and implications)
- Project Technical Description, Wiring, Connection and Payments
- Potential environmental and social risks and impacts: positive and negative impacts and project opportunities.
- Grievance Redress Committee
- Focus Group Discussions: Men, Women and Youth.
- Review of feedback from FGDs by all community members.

In attendance (refer to annexed list of participants)

MIN 1.0 WELCOMING AND OPENING

The Assistant Chief Mr. Lazarus Epae said residents belong to the Ngissiger Clan of the Turkana tribe and main economic activity is fishing. There are 890 Households, 32 (disabled persons), 24 Windows and 40 old and vulnerable people. Proposed Location of the minigrid is not sited near any sensitive place and neither is any resettlement is envisaged.

James Iokeng said some people had come take dimensions of area and some residents were present. After the meeting we shall all go there for community and validate. He then invited the project team to address the meeting.

The visiting team introduced themselves as follows;

- | | | |
|---------------------|---------------------------------|-----------------|
| 19. Kioko Maithya | - Social Safeguards Officer | - RREC |
| 20. Irene Kawira | - Senior Environmentalist | - RREC |
| 21. Caleb Ewoi | - CREO | - MOE |
| 22. Agnes Gachoki | - Senior Surveyor | - RREC |
| 23. Lawrence Lorika | - Technician | - KPLC (Iodwar) |
| 24. Myra Mukulu | - Technical Advisor Cook Stoves | - MOE |

MIN 2.0 KOSAP AND NACHUKUI MINI GRID

Ms Myra Mukulu informed the participants that the proposed project is part the Kenya off Grid Solar Access Project (KOSAP) which is funded by the World Bank and is being implemented by the Ministry of Energy, the Kenya Power and Lighting Company (KPLC) and the Rural Electrification and Renewable Energy Corporation (RREC). MoE will provide overall coordination of the Project including responsibility for safeguards due diligence, and compliance monitoring. RREC will implement the mini grid and will be responsible for the implementation of Resettlement Framework Plan, Environmental Social Management Framework and Social Assessment. She said the Government is committed to providing electricity to communities that have not been served by the national grid such as Nachukui because it recognises energy as a key development enabler.

She said KOSAP entails the following components;

5. Provision of electricity through solar mini grids to households, enterprises and community facilities,
6. Provision of energy services through solar home systems for and clean cooking technologies for households
7. Provision of solar power to electrify boreholes as well as to power community facilities
8. Community engagement and education as well as capacity building and institutional support for the national and county Governments

She further, said KOSAP is being implemented in 14 counties. In Turkana County 23 minigrid sites, 98 stand-alone solar facilities (public facilities) and 38 boreholes (solarisation) had been identified. One of these minigrid sites is Nachukui.

She noted that the agenda of the visit was to; undertake an environmental and social screening of the proposed project site, to sensitize the community on the project land requirements and community rights and entitlements, explain the Project Technical Description and connection requirements, discuss potential environmental/social risks and impacts and mitigation and sensitize members on grievance redress mechanism.

MIN 3.0 PROJECT LAND REQUIREMENTS: RIGHTS AND ENTITLEMENTS OPTIONS AND IMPLICATIONS

The Surveyor, Ms. Agnes Gachoki told the Baraza that the main purpose of the Baraza was to seek community consent for land donation for the project. Land required for the construction of the Mini grid is 3-5 acres. In Nachukui, Land falls under the Community land category. It is yet to be registered, has no title but is jointly owned by the community. Its use and management is governed by the Community Land Act 2016.

She explained the various forms of acquiring in land including; allocation, land adjudication process, compulsory acquisition, settlement programs, transfers, donation and long-term leases.

The Surveyor informed the meeting that if they opted to consent to donation of the project land, following VLD criteria has to be met;

VLD criteria

1	The infrastructure must not be site specific.
2	The impacts must be minor, that is, involve no more than 10 percent of the area and require no physical relocation.
3	The land required to meet technical project criteria must be identified by the affected community, not by line agencies or project authorities
4	The land in question must be free of squatters, encroachers, or other claims or encumbrances.
5	Verification (for example, notarized or witnessed statements) of the voluntary nature of land donations must be obtained from each person donating land.
6	If any loss of income or physical displacement is envisaged, verification of voluntary acceptance of community-devised mitigatory measures must be obtained from those expected to be adversely affected.
7	If community services are to be provided under the project, land title must be vested in the community, or appropriate guarantees of public access to services must be given by the private titleholder.
8	Establishment of Grievance mechanisms

Agnes also told the community on their rights and entitlements to the following;

1. They can refuse to donate the land.
2. They can opt to seek compensation for the project land.
3. They can refuse or accept the project.
4. The right to resettlement assistance in addition to compensation for affected assets, where the more vulnerable individuals/households have been identified among them.
5. The right to livelihood restoration measures where the project has impacted their livelihood strategies, if they choose compensation.

The surveyor further informed the meeting that there were several options on land compensation;

- d) Payment of cash for the land that has been identified for the project. For this to take place the land is has to be valued first. All monies payable as compensation for acquisition unregistered community land are then held in trust by the county government. Any such monies shall be deposited in a special interest earning account by the County Government and shall be released to the community upon registration of the community land.
- e) Compensation of land for land. The community would identify a similar piece of land in value to the project site and request that the same is purchased for the community.
- f) A further option is compensation in kind. This option is for the community to grant land for the project and request for compensation in kind. This could be in the form of a project for the benefit of the community like the construction of classrooms or a borehole. This is the most preferred option.

She said the surveyor will need to pick exact GPS points of the land proposed for the project and with community consent the land will be registered in the name of the implementing agency. The surveyor encouraged the community to make an informed decision that collectively involved every member of the community the elders, men, women, the marginalised and PLWDs. Any land donation would have to be signed by at least five representatives nominated by the community. She disclosed to the meeting what the term advance possession on land issues meant and requested them to consider allowing the implementing agency to take possession of the parcel and commence construction of the project even as the land transfer process is going on.

MIN 4.0 PROJECT TECHNICAL DESCRIPTION, WIRING, CONNECTION AND PAYMENTS

Mr. Lawrence Lorika from KPLC told the meeting the proposed mini grid will comprise a solar system and a thermal unit (generator). The Mini-grid will have a capacity of 31KVA and PV 104kwp). He said all potential customers will be mapped for connection. Energy meters will be installed by KPLC staff and the locals living within the required 3 km radius would be connected to power. He said to be connected one will be required to pay a one-off connection fee of kshs.1000 as opposed to other places like Lodwar, Kitale and other big towns whereby they pay kshs.15000 or more.

Power would not be for free, and residents will be buying tokens to facilitate their needs as far electricity is concerned. Tokens can be purchased in amounts of Kshs 50 and above. Purchase is done through a vendor or directly purchasing and paying through the mobile money platforms. The token purchased through this 'Pay As You Go' (PAYG)) mechanism, will last according to the individual power usage. If you have more load for example ceiling fans and air conditioners in your shop, it will last for short period of time.

He told the Baraza that power distribution will involve passing of electrical lines along the roads in order to reach their houses, business premises and public facilities and requested the community grant way leave consent.

He said the project land where the powerhouse comprising solar panels, diesel generator, batteries and inverters will be installed will be fenced of as a safety measure and access will thus be restricted to people and animals. The minigrid system would be operating throughout the day and night. In case of overload, cloudy day or low battery, the generator will automatically kick in to supply power.

MIN 5.0 SOCIAL AND ENVIRONMENTAL ISSUES

The Environmental specialist Ms Irene Kawira Mate said that there were many benefits that would accrue to residents due to the supply of power to the area. She cited some of them as:

Potential positive impacts:

7. Improved educational standards as a result of longer study hours for leaners.
8. Enhanced health care as Clinics/dispensaries can operate at night and store perishable drugs and vaccines
9. Employment of locals during the construction phase
10. Increased information access and entertainment (TV, Radio, Internet phones and computers).
11. refrigeration of food products like meat and milk thereby increasing their shelf life
12. Opportunity for locals to establish business ventures like hairdressing, photocopy and welding.

Potential negative impacts:

6. The land that is currently in use for grazing will now no longer be accessible to the residents as it would be fenced off.
7. The risk of electrocution due to lack of proper handling and care. The Contractor shall however educate the community on safety precautions.
8. Labour influx leading to sexual exploitation and harassment.
9. Environmental contamination may arise due to disposal of used batteries, inverters and other materials.
10. Increase in cases of Gender Based Violence and sexual harassment of workers

She affirmed that the project beneficiaries were the Yapakunur Clan, a major sub-tribe of the Turkana language group who are Indigenous people and are the only VMG residing near the sub-project area thus the sole project beneficiary. Construction of the mini grid could restrict the access of VMGs to grazing land thus affecting availability of pasture, and consequently their main source of livelihoods, and forcing families to relocate grazing activities elsewhere. Consequently, a VMGP may not be required. The project can include specific interventions in the final ESMP to ensure the community has access to culturally appropriate benefits. The project will strive to minimize adverse impacts on the indigenous people and ensure that they fully and continuously participate in the consultation process and receive culturally appropriate benefits from construction of the mini grid. The ESIA study would be

conducted before the onset of the project and an ESMP developed outlining viable mitigation measures.

Screening would be undertaken to ensure that the project is designed and implemented in an environmentally and socially sustainable manner, taking into account Kenya's relevant sector legislation as well as World Bank Safeguard Policies. This would be undertaken using screening checklists in reference to requirements of the Environmental Management and Coordination Act, 1999 (amended 2019) and KOSAP-Environmental and Social Management Framework (ESMF). The screening process would consider potential impacts of the project and propose viable mitigation measures. She assured the community that temporary or minor impacts which are foreseen during project implementation will be sufficiently mitigated.

Grievance Resolution Mechanism (GRM)

Ms Mate informed the Baraza on the need for constitution of a locational Grievance Resolution Committee (GRC) for purposes of resolving any grievances that may arise in the lifetime of the project as guided by project frameworks. The local GRC will be the first stop shop for resolution of project related disputes and grievances for project affected persons and interested parties. The GRM should be culturally appropriate, inclusive, and accessible and developed in consultation with Nachukui community. Grievances which cannot be resolved by the local GRC shall be escalated to the sub-county GRC and the National GRC respectively. Any unresolved matter can then be referred for arbitration or to a court of law. World Bank's GRS is also available to stakeholders to lodge their grievances. The GRC should constitute representation from all genders, youth and vulnerable persons. It should be structured in such a way that it provides multiple channels for lodging grievances, ensure anonymity and confidentiality. The following details shall be recorded for each grievance reported; and a close-out form issued to indicate the grievance registered has been closed.

- j) Date of complaint
- k) Name of complainant
- l) ID of complainant
- m) Telephone contact of complainant
- n) Nature of complaint
- o) Name of the Person handling the complaint
- p) Contacts of person addressing the complaint
- q) Action taken
- r) Date of conclusion of complaint

Existing indigenous grievance redress mechanism

Conflicts occasionally arise within individuals and families. The Nachukui community like in all other parts of the Turkana society is endowed with elaborate and systematic traditional mechanisms of conflict management. When disputes occur, they are referred elders (*Ng'akasukou*). The elders then summon involved parties and witnesses to the meeting point (*Ekitoe Ng'akasukou*). The elders will listen to the conflicting parties/individuals, weigh adduced evidence and pronounce the verdict accordingly. Any matter that is not resolved or when the parties are not satisfied they can report to the chief or seek discourse in a court of law.

The summary of the comments/remarks from the community in the meeting held at Nachukui
QUESTION/COMMENTS ANSWER/REMARKS

QUESTION/COMMENTS	ANSWER/REMARKS
<p>Simon Kiyoo – Elder)</p> <p>Nimefurahi sana kwa nyinyi kufika hapa, kwa kuahgua kuileta hapa. Tunarudisha shukrani. Mumetueleza maana yah ii mradi. It Should be located away from centre kuliko mtu kukuja na mbuzi ikufie apo.</p>	<p>Project will be fenced off and watchmen employed</p>
<p>Imojong Akal (Elder)</p> <p>Nafurahia sana kwa ile kitu, Nimependa kwanza kwa hii mradi. Miradi ni mingi lakini hii ya stima imenifurahisha sana. Benefits are many. Sana sana kwa elimu, health (Fishing/ its benefits cut across the community.</p>	<p>Noted</p>
<p>Patrick Mana (Youth)</p> <p>I have seen some other power projects where people are given power as a promotion for a period of time. If this similar?</p>	<p>No. you buy tokens to start consuming</p>
<p>Nicholas Echom (Men) Kazi tutapata namna gani?</p>	<p>Non-technical work, locals to be prioritized.</p>
<p>Julius Kadong (Men) How long do I take before I start paying for tokens?</p>	<p>To use power, you will have to buy tokens first</p>
<p>ISAIAH EKAI (youth) Baada ya casual work and project is ready- kule kwa station- what are other activities need employment.</p> <p>Stima iko na uzuri tu mingi, madhara nayo ni gani? Kuna compensation iko incase of destruction?</p>	<p>Watchmen/ machine operators (Day/night)</p> <p>Use a qualified technician however at times mistake is not on part of technician. If line has a problem power will switch off at the station.</p>

MIN 6.0 Focus Group Discussions

After the main meeting women, men and youth convened for separate discussions (FGDs) where they could freely converse amongst themselves and pour out insights (hopes, fears, aspirations and expectations in relation to the mini grid and the land question).

FGD-MEN

The main objective of this discussion was to get gather and document how men thought/felt about the issues discussed during the main meeting including; environmental and social screening of the project site, land requirements and community rights/ entitlements, Project Technical Description and connection requirements, potential environmental/social risks and impacts, mitigation and grievance redress mechanism. The FGD would also provide them an opportunity to air their issues/give their opinions on the project.

Kioko them the FGD was a good avenue for the elders to express their opinions and freely ask any questions they might not have been unable to ask in front of the youth and women, He said that at the end of the FGD discussion the group should come into consensus on issues discussed in the earlier meeting and select a representative to the GRC. During the meeting the Men agreed to voluntary land donation and selected the following as their representatives in the GRC;

The men however said they had no further questions and proceeded to elect the following to the GRC;

Name	ID number	Telephone number
Emojong akal	0611105	Un available
Simon kio	0238897	0798223585

FGD WOMEN

A focus group discussion was held with women. The main objective of this discussion was to gauge whether the women had understood the project and its requirements and to provide them an opportunity to air their issues/give their opinions on the project. Myra explained to the women that it was important to hold a separate discussion with them so that they have opportunity to freely express themselves as this may have not been possible in the Baraza. The women were allowed time to ask questions, give suggestions and or seek clarifications.

From the questions in the group, it was clear that they had not understood the issue. Myra then explained that the meeting was to clarify any issues about the project on environmental and social issues as well as request land donation from the community. She explained further that the Ministry wanted land for was to construct a solar minigrd. She explained further that they should select women representatives for women to cater for their respective issues.

The women understood the issue. When asked if they had any questions on the project, they stated that they did not have any questions. Therefore Myra requested that they elect women representatives to the GRC.

The women nominated were:

Name	ID number	Telephone number
Grace Kimat Korobe	27693968	0712598953
Lochokae Esther Ekalale	24568509	0799347358

FGD YOUTH

The youth had no questions and went when asked to nominate members to the GRC they proposed that the members they had nominated to sign the land donation forms she serve them in the GRC

8.0 Review of feedback from FGDs by all community members.

After the FGDs the participants convened back to the main meeting to review the respective resolutions from the FGDs. During the meeting they expressed their support towards the project saying the benefits to the area shall be enormous. They mentioned the opportunity to light their homes, establish income generating business ventures and employment as some of the major benefits.

They resolved to freely donate land for the project, validated the nominees to the GRC and elected officials to lead the identification of project land and sign the land donation form on their behalf.

The community nominated the following as members of the GRC:

No	Name	Design.	1D No.	Mobile No.
1	Grace Kimat Korobe	Women	27693968	0712598953
2	Lochokae Esther Ekalale	Women	24568509	0799347358
3	Emojong akal	Men	0611105	Un available
4	Simon kio	Men	0238897	0798223585
5	Youth to be served by their nominees to the land donation team			

APPENDIX 5 ABBREVIATED RESETTLEMENT ACTION PLAN (A-RAP)

1. Nachukui Sub-project Site

The Nachukui sub-project site is on unregistered community land and held in trust by the County Government of Turkana on behalf of the community, in line with the Community Land Act 2016. The proposed site is uninhabited, has no structures, community facilities, or encumbrances, and is utilized by the community for grazing. Consultations leading to the identification and selection of the sub-project site are captured in the Environmental and Social Screening report for Nachukui. *Refer to Chapter 5 of the ESIA for the comprehensive socio-economic profile.*

2. Actual Census Survey of PAPs and Valuation of Affected Assets

The number of project-affected persons (PAPs) is 5500 (approximately 335 households). The land acquisition-related impacts are loss of land and pasture. Mitigation measures include in-kind compensation for loss of land and pasture, and designing power distribution lines to avoid impacting trees, crops, structures, and community facilities. No physical displacement is anticipated; however, there is minimal loss of pasture occasioned by the acquisition of land utilized by the community for grazing. The 1.252 Hectares identified for the sub-project will be acquired compulsorily by the National Land Commission (NLC). The proposed site will be valued and compensated in line with the provisions of the Resettlement Policy Framework (RPF) prepared under KOSAP. *Refer to section 2.2 of the ESIA for the sketch map of the site.*

3. Compensation Measures Agreed with the PAPs and other Resettlement Assistance to be Provided

The proponent requested the community identify three priority projects, whereby one out of the three would be provided as in-kind compensation for loss of land and pasture. The Nachukui community requested as 1st priority; improvement of clean water supply in the area by doing water reticulation and piping from Nariokotome and 2nd priority; construction of ECD Classes while 3rd priority- maternity ward and hospital lab at the dispensary.

The value of the priority community project will be proportional to or higher than the value of land under acquisition. In addition, loss or damage to crops, trees, structures, and community facilities will be compensated in line with the provisions of the RPF, and as summarized in the entitlement matrix below.

3.1 Entitlement Matrix

Types of Impact	Person(s) Affected/Eligible for Compensation	Compensation/Entitlement/Benefits	Responsible organization
1. Loss of Land			
Loss of unregistered community land.	Community.	Compensation in-kind as prioritized by the community.	REREC
Loss of land in unregistered group ranches.	Group ranch members.	Compensation in-kind as prioritized by the community.	
Loss of land in registered group ranches.	Group ranch members.	Compensation in-kind as prioritized by the community.	
Loss of land owned by the National Police, county governments and the Ministry of Interior	Government agencies.	No compensation for public land allocated to another government body.	
Loss of land owned by the Kenya Forest Service (KFS) and Kenya Wildlife Service (KWS).	Government agencies.	No compensation for public land allocated to another government body. However, payment of conservation fees to KWS and KFS as stipulated under their respective regulations is foreseen.	
2. Loss of Use on Land			
Loss of use on public land (e.g., grazing, farming etc.).	Communities utilizing public land.	Communities do not own public land; however, they utilize public land with consent from the relevant agencies. The project will implement the infrastructure project prioritized by the community as compensation for the loss of public land use.	REREC
Loss of use on unregistered community land, unregistered group ranches and registered group ranches (e.g., grazing, farming etc.).	Communities utilizing unregistered community land, unregistered group ranches, and registered group ranches.	Compensation in-kind as prioritized by the community.	
3. Loss of /Damage to Assets on Land			
Trees	Community members on unregistered community land; community members utilizing public land; members of registered and unregistered group ranches and government entities.	During detailed design for power distribution lines and construction of the mini grid and community project, any crops, structures, trees, and community facilities shall be avoided to the extent possible. However, loss	REREC
Crops			
Structures			

Community facilities e.g., water sources (earth pans, boreholes etc.).	Community members on unregistered community land, community members utilizing public land, and members of registered and unregistered group ranches.	or damage to the above will be compensated/restored at full replacement cost, ¹ in line with the provisions of the RPF.	
--	--	--	--

4. Consultations with PAPs About Acceptable Compensation Options and Alternatives that have been Considered

Detailed consultations with PAPs on land acquisition and compensation, including the modalities of acquiring land and compensation options, were undertaken during the Environmental and Social Screening, Environmental and Social Impact Assessment, and the NLC land valuation process. The following sections provide a summary of the consultations.

4.1 Engagement of Project -Affected Persons (PAPs)

Local administration and County Renewable Energy Officers (CREOs) supported the proponent and implementing agency (IA) to mobilize community members and other stakeholders for public consultations and engagement activities. National and county government entities, community segments (men, women, youth, elders, persons with disability, vulnerable and marginalized groups, etc.), NGOs, and local leaders were engaged through key informant interviews, community meetings, and focus-group discussions. The proponent and IA implemented appropriate measures to ensure PAPs effectively participated in the consultations. *Refer to Chapter 5 of the ESIA on public consultation and engagement.* Once the compensation award and Bill of Quantities (BoQs) are known, the Implementing Agency (IA) will engage the community and agree on the community project to be executed as in-kind compensation. During these consultations, the IA and the community will define the roles and responsibilities of the community in monitoring the implementation of in-kind compensation and maintenance once the IA hands it over to the community. Thus, the IA and the community will effect an agreement to be signed by the local leadership; representatives of the Grievance Redress Committees at the locational, county, and national levels; A-RAP Implementation Committee, and Implementing Agencies.

4.2 Identification of Community Representatives

The Nachukui Locational Grievance Redress Committee (LGRC), constituting a chairperson, secretary, and three members, was formed through community consensus. The committee's membership comprises men, women, youth, persons with disabilities, and ethnic minorities. The LGRC is responsible for engaging PAPs and resolving complaints. Refer to Chapter 6 of the ESIA on the Grievance Redress Committees. Further, the community will constitute the A-RAP Implementation Committee responsible for coordinating community engagements on the A-RAP and monitoring the implementation and closure of the A-RAP. The representation of the committee will consider gender, vulnerability, and intergenerational sensitivities.

4.3 Summary of Consultations on Land Acquisition and Compensation Options

Figure 1: _____

¹ A cost basis that will yield compensation sufficient to replace assets, plus necessary transaction costs associated with asset replacement).

Date	Objective	Implementing Entities	Land Acquisition and Compensation Aspects Discussed	Key	Responses Given
13 th March 2021	Environmental and Social Screening. Voluntary land donation (VLD). Constitution of the Locational Grievance Redress Committee (GRC).	Ministry of Energy (MoE) Kenya Power (KPLC) Rural Electrification and Renewable Energy Corporation (REREC)	Site identification and land allocation for the sub-project. Criteria for VLD. Community entitlements (forms of compensation and implications for each).	None	None
15 th January 2022	Environmental and Social Impact Assessment.	Consultants MoE KPLC REREC	Land acquisition through compulsory acquisition (not voluntary land donation). Selection of three priority community projects, whereby one is to be implemented as in-kind compensation for land.	The community requested the following projects. 1st Priority- Improvement of clean water supply in the area by doing water reticulation and piping from Nariokotome. 2nd Priority- Construction of ECD Classes. 3rd Priority- Maternity ward and hospital lab at the dispensary.	The proponent has set aside KES 1 million to implement the priority in-kind compensation project. The value of the project will be proportional to or greater than the value of land. NLC will determine the value of land.
May 2023	Compulsory Land Acquisition.	NLC	Site inspection and inquiries. Land valuation. Award of compensation.		

5. Institutional Responsibility for Implementation of the ARAP

Entity	Role
Ministry of Energy	<ul style="list-style-type: none"> Coordinate A-RAP implementation and provide budget for in-kind compensation.
National Land Commission	<ul style="list-style-type: none"> Implement the statutory process for compulsorily land acquisition, including site gazettelement and inspections, inquiries, valuation, and award of compensation.
REREC	<ul style="list-style-type: none"> Monitor all land acquisition and compensation aspects (including A-RAP closure), complemented by a third-party monitor. Provide budgets for stakeholder engagement, grievance management, and monitoring, including the facilitation of the Land Acquisition and Compensation Implementation Committee, and the Grievance Redress Committee.
Mini-grid Contractor	<ul style="list-style-type: none"> Implement in-kind compensation concurrently with the solar mini-grid project.
Supervising Consultant	<ul style="list-style-type: none"> Monitor and report on implementation of in-kind compensation, and overall project compliance with social safeguards.
Grievance Redress Committees	<ul style="list-style-type: none"> Formed at the locational, county, and national levels, and responsible for resolving complaints, including A-RAP related grievances.
A-RAP Implementation Committee	<ul style="list-style-type: none"> Coordinate A-RAP engagements at the community level, monitoring A-RAP implementation and closure.
Affected Community	<ul style="list-style-type: none"> Responsible for the operation and maintenance (O&M) of in-kind compensation project. An agreement stipulating the O&M roles and responsibilities of the community will be effected.

6. Procedures for Grievance Redress

The Project procedures for grievance redress were established through a public consultation process and informed by the existing conflict resolution structures in the community. The Grievance Redress Mechanism (GRM) comprises tiers at the project, county, and national levels. *Refer to Chapter 6 of the ESIA for a detailed GRM.*

7. Implementation Timetable and Budget for the ARAP Implementation

7.1 Timelines

The proponent will commission the community project by May 25th, 2025, before operationalizing the mini-grid. The mini-grid contractor will implement the mini-grid and the community project simultaneously. The Supervision Consultant and IAs will implement a commitment register to ensure the mini-grid contractor can achieve the agreed-upon milestones. The register will be complete with clear and practical timebound indicators, which can be monitored by all parties – the PAs, IAs, the Ministry, third-party monitor, and the Bank.

7.2 Budget

The proponent has set aside KES 1 million for the community project (budget captured in the ESMP). The compensation award from NLC and the Bill of Quantities will inform the final cost of the community project. The costs for in-kind compensation, stakeholder engagement, grievance management (including the facilitation of the GRCs and the A-RAP Implementation Committee), and monitoring are covered under the project.

APPENDIX 6 – NEMA PRACTISING CERTIFICATES



FORM 7

(r.18(2))

**NATIONAL ENVIRONMENT MANAGEMENT
AUTHORITY (NEMA)
THE ENVIRONMENTAL MANAGEMENT AND CO-ORDINATION ACT
ENVIRONMENTAL IMPACT ASSESSMENT/AUDIT (EIA/EA) PRACTISING
LICENSE**

License No : NEMA/EIA/ERPL/18263

Application Reference No: NEMA/EIA/EL/23929

M/S Norken International Limited
(individual or firm) of address
P.O. Box 9882 - 00100 NAIROBI

is licensed to practice in the
capacity of a (Lead Expert/Associate Expert/Firm of Experts) **Firm of Experts**
registration number **0181**

in accordance with the provision of the Environmental Management and Coordination
Act Cap 387.

Issued Date: 12/30/2022

Expiry Date: 12/31/2023

Signature.....

(Seal)

Director General

The National Environment Management Authority





nema
mazingira yetu | uhai wetu | wajibu wetu

FORM 7

(r.15(2))

**NATIONAL ENVIRONMENT MANAGEMENT
AUTHORITY (NEMA)
THE ENVIRONMENTAL MANAGEMENT AND CO-ORDINATION ACT
ENVIRONMENTAL IMPACT ASSESSMENT/AUDIT (EIA/EA) PRACTICING
LICENSE**

License No : NEMA/EIA/ERPL/18279

Application Reference No: NEMA/EIA/EL/23951

M/S Isaiah Kegora
(individual or firm) of address
P.O. Box 860 - 20200 Kericho

is licensed to practice in the

capacity of a (Lead Expert/Associate Expert/Firm of Experts) **Lead Expert
General**

registration number **1893**

in accordance with the provision of the Environmental Management and Coordination
Act Cap 387.

Issued Date: 12/30/2022

Expiry Date: 12/31/2023

Signature.....

(Seal)

Director General

The National Environment Management Authority

P.T.O.



ISO 9001:2015 Certified