



**MINISTRY OF ENERGY
REPUBLIC OF KENYA**

**ENVIRONMENTAL & SOCIAL IMPACT ASSESSMENT REPORT FOR THE
PROPOSED KANAKURDIO MINI-GRID-TURKANA COUNTY**



PROJECT:
KENYA OFF-GRID SOLAR ACCESS PROJECT



LOCATION :
KANAKURDIO VILLAGE, KANAKURDIO SUB-LOCATION, KANAKURDIO LOCATION,
TURKANA NORTH SUB-COUNTY IN TURKANA COUNTY

2023

CERTIFICATION

This ESIA project report for the proposed Kanakurdio Off-Grid Solar Project was prepared in accordance with the Environmental Management and Coordination Act (EMCA), 1999 and the Environmental (Impact Assessment and Audit) regulations, 2003 and their subsequent EMCA (amendments), 2015 and EIA/EA regulations (amendments), 2019, the World Bank operational procedures (OP) and Environmental Safeguards Standards (ESS) for submission to the National Environment Management Authority (NEMA). We hereby certify that to the best of our knowledge and belief, the information and particulars provided in this report are correct and true. Further, it reflects the views provided by various stakeholders and village elders at Kanakurdio, Turkana county.

Name and Address of Firm of Experts:

 Norken International Ltd ENGINEERING AND MANAGEMENT CONSULTANTS P. O. Box 9882 - 00100 Nairobi, Kenya Tel. +254 020 2248762 Registration No. of Firm of Experts: 0181	 CENTRIC AFRICA LTD P.O. Box 102081-00101 Nairobi, Kenya Tel. +254 718 068 517 Registration No. of Firm of Experts: 7112
---	---

Name and Address of Firm of Experts:

Signed: _____
Isaiah B. Kegora
Lead EIA/EA Expert (NEMA Reg. No 1893)
For: Norken International Ltd & Centric Africa Ltd

Date: _____

Name and Address of the Proponent:

Ministry of Energy,
P.O. Box 30582-00100,
Kawi House, Nairobi, Kenya

Signed: _____

Date: _____

Name: _____

Designation: _____
For: MoE

Disclaimer:

This ESIA report is strictly confidential to MoE (the Proponent) and any use of the materials thereof should strictly be in accordance with the agreement between the Proponent and the consultants; Norken International Limited and Centric Africa Limited (the Environmental Impact Assessor). It is, however, subject to conditions in the Environmental (Impact Assessment and Audit) Regulations, 2003 under the Kenya Gazette Supplement No. 56 of 13th June 2003.

Table of Contents

CERTIFICATION	1-I
----------------------------	------------

EXECUTIVE SUMMARY	1-1
--------------------------------	------------

1 INTRODUCTION.....	1-10
----------------------------	-------------

1.1	CONTEXT	1-10
1.2	PROJECT JUSTIFICATION	1-11
1.3	PROJECT OVERVIEW	1-12
1.4	OBJECTIVES OF THE ESIA	1-12
1.5	PURPOSE AND SCOPE OF WORK	1-12
1.6	ESIA METHODOLOGY	1-12
1.6.1	KICK-OFF MEETING	1-12
1.6.2	SCREENING AND SCOPING	1-13
1.6.3	DESK BASED REVIEW AND BASELINE ASSESSMENT	1-13
1.6.4	PROJECT DESCRIPTION	1-13
1.6.5	BASELINE CONDITION	1-13
1.6.6	IMPACT ASSESSMENT (IA) PREDICTION	1-14
1.6.7	PUBLIC CONSULTATIONS	1-15
1.6.8	ENVIRONMENTAL AND SOCIAL MANAGEMENT AND MONITORING PLAN (ESMMP)	1-17
1.7	LIMITATIONS/UNCERTAINTIES	1-18
1.8	LAYOUT OF THE REPORT	1-19
1.9	STUDY TEAM	1-19

2 PROJECT DESCRIPTION	2-21
------------------------------------	-------------

2.1	INTRODUCTION	2-21
2.2	PROJECT LOCATION	2-21
2.3	DESCRIPTION OF PROJECT FACILITIES, COMPONENTS AND ACTIVITIES	2-22
2.3.1	DESCRIPTION OF THE PROPOSED SOLAR MINI-GRID	2-22
2.4	PROJECT COMPONENTS	2-23
2.4.1	NATURE OF THE PROJECT	2-23
2.4.1	THE PV GENERATOR	2-25
2.4.2	POWERHOUSE	2-26
2.4.3	MULTI-MODE INVERTER	2-26
2.4.4	BATTERY ENERGY STORAGE SYSTEM	2-27
2.4.5	DIESEL GENERATOR	2-28
2.4.6	DISTRIBUTION LINE AND ENERGY METERS	2-28

2.4.7	CABLE REQUIREMENTS	2-28
2.5	RESOURCE REQUIREMENT	2-29
2.5.1	WORKFORCE REQUIREMENT	2-29
2.5.2	WATER REQUIREMENT AND SOURCE	2-29
2.5.3	RAW MATERIAL REQUIREMENT	2-29
2.5.4	POWER REQUIREMENT	2-30
2.5.5	FIRE SAFETY	2-30
2.5.6	ELECTRICAL SAFETY	2-30
2.5.7	ACCESS TO THE SITE	2-30
2.5.8	SECURITY	2-31
2.5.9	VEGETATION UNDERGROWTH	2-32
2.6	ANALYSIS OF ALTERNATIVES AND PROJECT JUSTIFICATION	2-32
2.6.1	PRESENT POWER SUPPLY POSITION	2-32
2.6.2	ALTERNATE LOCATION FOR PROJECT SITE	2-32
2.6.3	ALTERNATE METHOD OF POWER GENERATION	2-33
2.6.4	ZERO OR NO PROJECT ALTERNATIVE	2-33
2.6.5	ANALYSIS OF ALTERNATIVE CONSTRUCTION MATERIALS AND TECHNOLOGY	2-34
3	BASELINE SETTINGS – PHYSICAL AND SOCIO-ECONOMIC ENVIRONMENT	3-35
3.1	AREA OF INFLUENCE	3-35
3.1.1	PROJECT FOOTPRINT AREA	3-36
3.1.2	STUDY AREA	3-36
3.2	PHYSICAL ENVIRONMENT	3-36
3.2.1	GEOLOGY AND SOILS	3-36
3.2.2	TOPOGRAPHY	3-36
3.2.3	PROJECT AREA FLORA AND FAUNA	3-36
3.2.4	HYDROGEOLOGY AND DRAINAGE	3-37
3.2.5	WATER RESOURCES	3-37
3.2.6	AMBIENT AIR QUALITY	3-37
3.2.7	AMBIENT NOISE QUALITY	3-38
3.2.8	SOIL TYPE	3-38
3.3	SOCIO-ECONOMIC ENVIRONMENT	3-38
3.3.1	DEMOGRAPHIC PROFILE	3-38
3.3.2	EDUCATIONAL INFRASTRUCTURE	3-38
3.3.3	ACCESS TO HEALTH	3-39
3.3.4	OCCUPATION AND LIVELIHOOD PROFILE	3-39
3.3.5	LAND AND LAND USE	3-39
3.3.6	ENERGY ACCESS	3-40
3.3.7	SOCIAL AND PHYSICAL INFRASTRUCTURE	3-40
3.3.8	VULNERABLE INDIVIDUALS AND HOUSEHOLDS	3-40

3.3.9	GENDER BASED VULNERABILITY	3-40
3.3.10	GENDER BASED VIOLENCE	3-41
3.3.11	CULTURE AND HERITAGE	3-41
3.3.12	RELIGION IN THE PROJECT AREA	3-41
3.3.13	HIV/AIDS PREVALENCE	3-41
3.3.14	COMMUNITY ORGANIZATIONS/Non-STATE ACTORS	3-41

4 APPLICABLE LEGAL AND REGULATORY FRAMEWORK.....4-43

4.1	INTRODUCTION	4-43
4.2	KENYA ELECTRICITY SUPPLY INDUSTRY (ESI)	4-43
4.3	NATIONAL POLICY AND LEGISLATIVE FRAMEWORK REVIEW	4-44
4.4	WORLD BANK OP APPLICABILITY	4-63
4.5	ENVIRONMENTAL AND SOCIAL MANAGEMENT FRAMEWORK (ESMF) FOR KOSAP	65
4.6	RESETTLEMENT POLICY FRAMEWORK (RPF) FOR KOSAP	65
4.7	VULNERABLE AND MARGINALIZED GROUPS FRAMEWORK (VMGF) FOR KOSAP	65
4.8	SOCIAL ASSESSMENT (SA)	66
4.9	COMPARISON BETWEEN THE WORLD BANK AND KENYAN LAWS TO THIS PROJECT	66

5 STAKEHOLDER ENGAGEMENT 69

5.1	LEGAL REQUIREMENT FOR STAKEHOLDER ENGAGEMENT	69
5.2	OBJECTIVES OF PUBLIC PARTICIPATION	69
5.3	STAKEHOLDER CONSULTATION AND DISCLOSURE REQUIREMENT FOR THE PROJECT	70
5.4	STAKEHOLDER CHARACTERISATION AND IDENTIFICATION	70
5.4.1	STAKEHOLDER MAPPING	71
5.5	APPROACH AND METHODOLOGY USED IN CARRYING OUT THE PUBLIC PARTICIPATION	73
5.5.1	STAKEHOLDER ENGAGEMENT SCHEDULE	73
5.5.2	MOBILIZATION FOR THE COMMUNITY MEETING	73
5.5.3	METHODS OF CONSULTATIONS	73
5.5.4	MEETING WITH TURKANA COUNTY KEY STAKEHOLDERS	73
5.5.5	PUBLIC FORUM/MEETING	73
5.5.6	FOCUS GROUP DISCUSSIONS	74
5.5.7	STAKEHOLDER ANALYSIS	74
5.5.8	INFORMATION SHARED TO THE COMMUNITY MEMBERS	75
5.5.9	SUMMARY OF COMMUNITY CONSULTATION MEETING LEADING TO LAND IDENTIFICATION AND GRC CONSTITUTION-(SCREENING LEVEL)	76

5.5.11	KEY FEEDBACK RECEIVED DURING STAKEHOLDER CONSULTATION PROCESS	82
5.6	SUMMARY FEEDBACK RECEIVED DURING FOCUSED GROUP DISCUSSION	84
5.7	DISCLOSURE OF ESIA TO THE STAKEHOLDERS	85
5.7.1	CONSENT	86
6	IDENTIFICATION OF POTENTIAL IMPACTS AND PROPOSED MITIGATION MEASURES.....	87
6.1	IDENTIFICATION OF IMPACTS	87
6.2	IMPACT ASSESSMENT METHODOLOGY	87
6.3	DEFINING IMPACT	87
6.4	ASSESSMENT OF SIGNIFICANCE	87
6.5	MAGNITUDE OF IMPACT	89
6.6	SENSITIVITY OF RESOURCES AND RECEPTORS	89
6.7	LIKELIHOOD	90
6.8	DEFINITION OF MITIGATION MEASURES	90
6.9	POSITIVE IMPACTS - PRE-CONSTRUCTION	91
6.10	POSITIVE IMPACTS DURING CONSTRUCTION PHASE	91
6.10.1	CREATION OF EMPLOYMENT OPPORTUNITIES	91
6.10.2	IMPROVING LOCAL ECONOMY	91
6.11	POSITIVE IMPACTS DURING OPERATION PHASE	92
6.11.1	QUALITY, RELIABLE POWER SUPPLY	92
6.11.2	EMPLOYMENT CREATION	92
6.11.3	REDUCTION OF POLLUTION ASSOCIATED WITH THERMAL POWER GENERATION, KEROSENE AND WOOD FUEL USAGE:	93
6.11.4	IMPROVEMENT OF LOCAL AND NATIONAL ECONOMY	93
6.11.5	EDUCATION	93
6.11.6	HEALTH BENEFITS OF THE PROJECT	94
6.11.7	IMPROVED STANDARD OF LIVING	94
6.11.8	SECURITY	94
6.11.9	COMMUNICATIONS	94
6.12	POSITIVE IMPACTS DURING DECOMMISSIONING PHASE	94
6.12.1	EMPLOYMENT OPPORTUNITIES	94
6.12.2	SITE REHABILITATION	94
6.13	NEGATIVE IMPACTS DURING PRE-CONSTRUCTION PHASE	95
6.13.1	LAND TAKE	95
6.14	NEGATIVE IMPACTS DURING CONSTRUCTION PHASE	95
6.14.1	VEGETATION CLEARANCE	95
6.14.2	SOIL EROSION IMPACT	96

6.14.3	CONTAMINATION OF SOIL FROM FOSSIL FUELS	96
6.14.4	DUST EMISSIONS	97
6.14.5	VEHICLE EXHAUST EMISSIONS	97
6.14.6	POLLUTION FROM SOLID WASTE GENERATION	97
6.14.7	IMPACTS ON WATER RESOURCES AND WATER QUALITY	98
6.14.8	NOISE AND VIBRATION	99
6.14.9	IMPACTS FROM HAZARDOUS MATERIALS	100
6.14.10	ACCIDENTAL OIL SPILLS OR LEAKS	100
6.14.11	FIRE HAZARDS	100
6.14.12	IMPACTS OF CONSTRUCTION MATERIAL SOURCING (E.G., QUARRYING)	101
6.14.13	INCREASED WATER DEMAND	101
6.14.14	ENERGY CONSUMPTION	102
6.14.15	OCCUPATIONAL HEALTH AND SAFETY IMPACTS	102
6.14.16	COMMUNITY SAFETY -ACCESS TO SITE BY GENERAL PUBLIC	103
6.14.17	SPREAD OF HIV/AIDS AND STIs	103
6.14.18	INCREASE IN COMPETITION FOR SCARCE RESOURCES AND STRAIN ON PUBLIC UTILITIES	103
6.14.19	CHILD LABOR	104
6.14.20	GENDER BASED VIOLENCE- SEA AND SH	104
6.14.21	PUBLIC HEALTH IMPACTS	106
6.14.22	FORCED LABOUR	107
6.14.23	RISKS RELATED TO INADEQUATE STAKEHOLDER ENGAGEMENT	107
6.15	NEGATIVE IMPACTS DURING OPERATION PHASE OF THE PROJECT	107
6.15.1	SOLID WASTE GENERATION	107
6.15.2	LIQUID WASTE/OILS GENERATION	108
6.15.3	INCREASED OIL CONSUMPTION	108
6.15.4	INCREASED STORM WATER FLOW	109
6.15.5	FIRE OUTBREAKS	109
6.15.6	VISUAL IMPACTS	109
6.15.7	WATER DEMAND	109
6.15.8	SANITARY WASTE	110
6.15.9	FLOODING	110
6.15.10	WORKERS OCCUPATION HEALTH AND SAFETY	110
6.15.11	HAZARDOUS WASTE	111
6.15.12	NOISE AND VIBRATION	111
6.15.13	ELECTRIC AND MAGNETIC FIELDS (EMFs)	111
6.15.14	SHOCKS AND ELECTROCUTIONS TO THE PAPs	111
6.15.15	COMMUNITY SAFETY -ACCESS TO THE FACILITY BY GENERAL PUBLIC	112
6.15.16	RISKS RELATED TO POOR OR INADEQUATE STAKEHOLDER ENGAGEMENT (CONFLICT)	112
6.15.17	GENDER BASED VIOLENCE- SEA/ SH	112
6.15.18	PUBLIC HEALTH IMPACTS –HIV/AIDS	113
6.15.19	PUBLIC HEALTH IMPACTS -COVID 19 DISEASE	113
6.15.20	DUST EMISSIONS	114

6.15.21	VEHICLE EXHAUST EMISSIONS	114
6.16	NEGATIVE IMPACTS DURING DECOMMISSIONING PHASE	114
6.16.1	NOISE AND VIBRATION	114
6.16.2	SOLID WASTE GENERATION	115
6.16.3	DUST EMISSIONS	115
6.16.4	HIV/AIDS AWARENESS AND PREVENTION	116
6.17	SOCIAL PROTECTION	116
6.18	SOCIAL INCLUSION	116
7	CHAPTER EIGHT: ENVIRONMENTAL AND SOCIAL MANAGEMENT AND MONITORING PLAN (ESMMP)	117
7.1	MONITORING	117
7.2	PLAN MONITORING	118
7.3	ENVIRONMENTAL AND SOCIAL MONITORING BY CONTRACTORS	118
7.4	MANAGEMENT PLAN DURING CONSTRUCTION PHASE	7-167
7.4.1	CONSTRUCTION MANAGEMENT PLAN	7-167
7.4.2	REHABILITATION AND SITE CLOSURE PLAN	7-168
7.4.3	LOCAL RECRUITMENT PLAN	7-168
7.4.4	WORKPLACE HEALTH AND SAFETY PLAN	7-169
7.4.5	COMMUNITY HEALTH AND SAFETY PLAN	7-169
7.4.6	EMERGENCY PREPAREDNESS PLAN	7-169
7.4.7	SEA/SH PREVENTION AND RESPONSE ACTION PLAN	7-169
7.4.8	STAKEHOLDER ENGAGEMENT MANAGEMENT PLAN	7-170
7.5	GRIEVANCE REDRESS MECHANISM	7-170
7.6	7.5.1 INTRODUCTION	7-170
7.7	GRIEVANCE MECHANISM	7-171
7.8	COUNTY GRIEVANCE REDRESS COMMITTEES (CGRC)	7-171
7.9	LOCATIONAL GRIEVANCE REDRESS COMMITTEE (LGRC)	7-172
7.10	GRIEVANCE REDRESS MECHANISM	7-174
7.11	WORLD BANK GRIEVANCES REDRESS MECHANISM	7-175
7.11.1	LABOR INFLUX MANAGEMENT PLAN	7-176
7.11.2	REHABILITATION AND DECOMMISSIONING MANAGEMENT PLAN	7-176
7.12	INSTITUTIONAL IMPLEMENTATION ARRANGEMENTS FOR THE PROPOSED PROJECT	7-177
7.12.1	PROPONENT -MINISTRY OF ENERGY AND PETROLEUM (MoEP)	7-177
7.12.2	KOSAP PROJECT IMPLEMENTATION UNIT	7-177
7.12.3	THE IMPLEMENTING AGENCY (REREC)	7-177
7.12.4	COUNTY GOVERNMENT OF TURKANA	7-177
7.12.5	NATIONAL ENVIRONMENTAL MANAGEMENT AUTHORITY	7-178
7.12.6	ROLES AND RESPONSIBILITIES OF THE SUPERVISING CONSULTANT	7-178
7.12.7	ROLES AND RESPONSIBILITIES OF THE CONTRACTOR	7-178

7.13	MANAGEMENT OF IMPACTS DURING OPERATION PHASE	7-179
8	CHAPTER NINE: CONCLUSIONS AND RECOMMENDATIONS..8-181	
8.1	CONCLUSIONS	8-181
8.2	RECOMMENDATIONS	8-182
9	REFERENCES.....	9-184
10	APPENDICES.....	10-185
10.1	APPENDIX 1 – PUBLIC MEETING PARTICIPANTS’ LIST	10-186
10.1.1	BARAZA LIST OF PARTICIPATION	10-186
10.2	APPENDIX 2 – ESIA MINUTES AND THE LIST OF PARTICIPANTS	10-191
10.2.1	MINUTES OF THE CONSULTATION MEETING HELD DURING THE ESIA	10-191
	APPENDIX 3 – FOCUS GROUP DISCUSSION PARTICIPANTS LISTS DURING THE ESIA	10-197
10.2.2	MEN FGD	10-197
10.2.3	FEMALE FGD	10-199
10.2.4	YOUTH FGD	10-201
10.3	APPENDIX 4 – MINUTES OF THE CONSULTATIVE MEETING HELD DURING LAND IDENTIFICATION	10-202
10.4	APPENDIX 5 – THE ABBREVIATED RESETTLEMENT ACTION PLAN (A-RAP)	10-215
10.5	APPENDIX 6 – NEMA FIRM OF EXPERT LICENSE	10-222

LIST OF TABLES

<i>Table 0-2: Summary of Pre-construction Impacts</i>	1-6
<i>Table 0-3: Summary of Construction and Decommissioning Phases Impacts</i>	1-6
<i>Table 0-4: Summary of Operation Phase Impacts</i>	1-7
Table 1-1 Structure of the ESIA Report	1-19
<i>Table 2-1: Summary Information of the proposed Kanakurdio Solar Mini-grid</i>	2-21
Table 4-1: Summary of demographic profile	3-38
Table 3-1: Administrative stakeholders and their roles	4-44
Table 3-2: National Policy and Legislative Framework	4-46
Table 3-3: World Bank Operational Ops	4-63
Table 3-4: Comparison between the WB Safeguard Policies and the Kenya Legislation	66
<i>Table 5-1: Identified Stakeholders</i>	71
<i>Table 5-2: Stakeholder Significance and Engagement Requirement</i>	72
Table 6-3: Summary of Stakeholder Influence	75
<i>Table 6-4: Summary of Information shared with community</i>	76

Table 6-5: Issues and concerns raised during the FGDs	85
<i>Table 7-1: Categories of Significance</i>	88
Table 7-2: Overall Significance Criteria for Environmental Impacts	89
Table 7-3: Explanation of Terms Used for Likelihood of Occurrence	90
Table 8-1: Environmental and Social Management and Monitoring Plan	120

LIST OF FIGURES

Figure 1-1: <i>Summary of Environmental and Social Impact Assessment Methodology</i>	1-18
Figure 2-1: Project Location	2-22

LIST OF PLATES

<i>Plate 5-1: Stakeholder's engagement process</i>	84
--	----

Abbreviations

ACRONYM	DEFINITION
ADR	Alternative Dispute Resolution
AoI	Area of Influence
CBOs	Community Based Organizations
CoK	Constitution of Kenya
CDI	County Development Index
CEMP	Construction Environmental Management Plan
CGRCs	County Grievance Redress Committees
CRA	Commission on Revenue Allocation
CSR	Customer Social Responsibility
CIDP	County Integrated Development Plan
CPS	Country Partnerships Strategy
DOSHS	Directorate of Occupational Safety and Health Services
EHS	Environment Health and Safety
EIA	Environmental Impact Assessment
EPRA	Energy Petroleum Regulatory Authority
EPT	Energy and Petroleum Tribunal
EPRA	Energy and Petroleum Regulatory Authority
ESI	Electrical Supply Industry
ESIA	Environmental and Social Impact Assessment
ESMF	Environmental and Social Management Framework
ESMP	Environmental and Social Management Plan
ESMMP	Environmental and Social Management and Monitoring Plan
EMCA	Environmental Management and Coordination Act
EMF	Electromagnetic Field
FGD	Focus Group Discussions
GDC	Geothermal Development Company
GoK	Government of Kenya
HDPE	High Density Poly Ethylene
IAs	Implementing Agencies
IPPs	Independent Power Procedures
IPs	Indigenous Peoples
JV	Joint Venture
KETRACO	Kenya Electricity Transmission Company
KII	Key Informant Interviews
KOSAP	Kenya Off-Grid Solar Access Project
KP	Kenya Power

LEP	Labour and Employment Plan
LGRCs	Local Grievance Redress committee
MGs	Mini Grids
MOE	Ministry of Energy
MSDS	Material Safety Datasheet
NEMA	National Environmental Management Authority
NGOs	Non-Governmental Organizations
NLC	National Land Commission
NTSA	National Transport and Safety Authority
OHS	Occupational Health and Safety
OM	Operation and Maintenance
OP	Operational Policies
PAD	Project Appraisal Document
PAPs	Project Affected Persons
PCU	Project Co-ordination Unit
PPAs	Power Purchase Agreements
PPEs	Personal Protective Equipment
PV	Photo-voltaic
REREC	Rural Electrification and Renewable Energy Corporation
RPF	Resettlement Policy Framework
SA	Social Assessment
SEA	Strategic Environmental Assessment
SERC	Standards and Enforcement Review Committee
SHS	Solar Home Systems
SIA	Social Impact Assessment
SOP	Safe Operation Procedure
STDs	Sexually Transmitted Diseases
STI	Science, technology and innovation
SMMP	Social Management and Monitoring Plan
ToR	Terms of Reference
VMGF	Vulnerable and Marginalised Groups Framework
VMGs	Vulnerable and marginalized groups
VMGP	Vulnerable and Marginalised Group Plan
WB	World Bank
WMP	Waste Management Plan
WRA	Water Resources Authority

EXECUTIVE SUMMARY

E.1 Context Setting

The Ministry of Energy (MOE) hereinafter refer to as proponent is implementing the Kenya Off-Grid Solar Access Project (KOSAP) in 14 underserved counties in Kenya. The aim of the project is to provide clean and modern energy services through off-grid solar solutions. The Proponent is coordinating the implementation of the project through the implementing agencies; Kenya Power (KP) and the Rural Electrification and Renewable Energy Corporation (REREC). The project is funded by the World Bank Group with \$150 million and a \$5 million grant from the Carbon Initiative for Development. The goal of the project is to bring electricity to around 250,000 households, 476 community facilities, and 380 boreholes in the target counties, benefiting low-income groups. It also includes the sale and installation of 150,000 efficient cook stoves. The project focuses on marginalized areas based on the County Development Index (CDI) and aims to address infrastructure deficits, lack of access to roads, electricity, water, and social services in these underserved counties. To ensure sustainability, the project relies on public funding, local community participation, and the institutional capacity of KP, REREC, and the MOE.

The KOSAP consists of four main components. The first component, focuses on the implementation of mini-grids to provide electricity to community facilities, enterprises, and households in areas where mini-grids are the most cost-effective option. The second component, aims to electrify households through standalone solar systems in areas without load clusters where standalone systems are the best technical and financial solution. The third component, supports the electrification of public institutions and community facilities using standalone solar systems. It also includes the installation of solar PV-powered water pumps for consumptive purposes. Lastly, the fourth component, provides funding for implementation support, technical assistance, and capacity building activities to ensure the sustainability and impact assessment of the interventions carried out under the other components of KOSAP.

In Turkana County, one of the target counties, the Proponent is proposing to develop 23 mini- grid facilities including Kanakurdio Mini Grid discussed in this report. In order to adhere to both national and donor requirements, the Proponent engaged the services to the consortium of Norken International Limited and Centric Africa Limited to undertake the ESIA. The ESIA has been conducted following the requirements outlined in the Environmental Management and Coordination Act (EMCA) 1999 and its amendments, as well as international environmental and social policies such as the World Bank's OP 4.01 on environmental assessment

E.2 Project Categorization and Justification.

In the World Bank context, there have been several projects supported by the organization that aim to provide electricity to communities located far from the national grid. These projects utilize off-grid approaches, meaning they are independent of a national or regional grid. The experience gained from these projects provides valuable guidance for designing sustainable off-grid electrification initiatives, particularly those targeting dispersed and economically disadvantaged communities. The Kanakurdio proposed site aligns with this category of projects that the World Bank has been involved in.

In the Kenyan context, the Environmental Management and Coordination Act (EMCA) of 1999, as amended in April 2019 through Legal Notice No. 31, classifies solar power farms and plants as medium risk projects. This categorization provides a framework for assessing and managing the potential environmental and social impacts associated with such projects. By categorizing the Kanakurdio site as a solar power facility, it falls within the medium risk project category as per the Kenyan legislative framework.

E.3 Approach and Methodology

The Environmental and Social Impact Assessment (ESIA) for the proposed project followed a structured process, beginning with kick-off meetings and online discussions involving the Proponent, Implementing agencies, and the World Bank Environmental and Social Safeguard Team. These consultations were instrumental in establishing the project's scope, deliverables, timeline, and methodology. Subsequently, screening and scoping exercises were conducted to evaluate potential social and environmental risks. A thorough desk-based review was also undertaken to assess existing project documentation, legal requirements, and relevant plans.

The study employed a comprehensive approach to gather primary and secondary data for the project. Both qualitative and quantitative methods were utilized, with secondary data obtained through literature reviews. Primary data collection involved various techniques, including physical observations, photography, interviews, and stakeholder consultations. This comprehensive approach enabled a comprehensive examination of the project's environmental and social aspects, ensuring a holistic understanding of its potential impacts.

The study further involved the identification and assessment of potential impacts throughout the project's life cycle. Key areas of evaluation included land use, water resources, biodiversity, air quality, noise levels, community health and safety, and socio-economic conditions. To mitigate adverse effects, the study developed environmental and social management and monitoring plan, aiming to address both positive and negative impacts that may arise from the project. These measures aimed to ensure the project's sustainability and enhance its overall environmental and social performance.

E.4 Legislative Regulatory Framework

The evaluation, planning, and implementation of the proposed project is guided by the World Bank's Environmental and Social Framework, the national legislative framework, and the project's safeguard instruments. These measures aim to ensure environmental sustainability, protect the rights and needs of indigenous peoples and marginalized groups, and minimize adverse impacts through effective management and mitigation measures.

The Government of Kenya established the Environmental Management and Coordination Act (EMCA) in 1999, providing a legal framework for environmental management. EMCA takes precedence over other sectoral laws related to the environment. In 2013, the government formulated a national Environmental Policy with the goal of promoting sustainable management and use of the environment.

Collaboration and consultation among government agencies and stakeholders are essential for coordinating environmental management effectively. Key institutions in Kenya responsible for environmental issues include the National Environment

Management Authority (NEMA), County Environment Committees, National Environmental Complaints Committee, National Environment Action Plan Committee, Standards and Enforcement Review Committee, National Environment Tribunal, and National Environment Council (NEC).

The project also adheres to the World Bank Safeguard Policies, which aim to improve decision-making processes, promote sustainable project options, and involve affected people in consultations. The applicable operational policies for this project include Environment Assessment, Natural Habitats, Indigenous Peoples, and Involuntary Resettlement. The Environmental and Social Impact Assessment (ESIA) considers these policies and addresses potential environmental and social concerns.

Additionally, the ESIA references other Safeguard Instruments prepared under the Kenya Off-Grid Solar Access Project (KOSAP), including the Environmental and Social Management Framework (ESMF), Resettlement Policy Framework (RPF), and Vulnerable and Marginalized Groups Framework (VMGF). These instruments provide procedures and guidelines for assessing and managing environmental and social aspects specific to the proposed subprojects under KOSAP.

E.5 Environmental Setting

Locations of ecological and social surveys were also selected based on receptor locations; in addition, special emphasis is given to areas within 1.5 km radius of the project site and distribution lines.

The county has sandy soils that support scattered shrubs and grasslands which are ideal for livestock production. The county's land is highly erodible. The exploitation of the soil resource thus must take into account conservation measures due to their fragile nature. The mineral potential of the soils is not exactly known as no geological mapping has been done. The topography of Turkana varies between semi-arid and arid landscapes consisting of low-lying plains and isolated hills and mountain ranges (Opiyo et al., 2015). It rises from a low altitude of 369m at Lake Turkana to 900m near Uganda border in the west.

The area is characterized by high levels of poverty, unemployment, and limited access to essential services such as education and healthcare. Livestock herding and small-scale enterprises are the primary economic activities, but opportunities for economic growth are constrained. Gender disparities persist, with women having limited decision-making power and economic empowerment. Infrastructure development, including roads, electricity, and water supply, is insufficient to meet the needs of the community.

E.6 Project Description

The Kanakurdio Mini Grid project aims to provide electricity to approximately 252 residential and 7 nonresidential consumers in Kanakurdio Sub-location, Kanakurdio Location, Kaeris Ward in Turkana North Sub-county, Turkana County. The project will utilize solar photovoltaic panels, a Battery Energy Storage System, and a Diesel Generator to generate electricity.

A Low Voltage Power Distribution Network will be established to distribute the power to customers. The project utilizes solar panels with a total capacity of 75 kWp to

harness solar energy. Solar power is a clean and renewable energy source that will provide a significant portion of the electricity needed for the project. A 188 kWh Battery Energy Storage System is incorporated to store excess solar energy during the day, ensuring a consistent power supply even during cloudy or nighttime conditions. A 60 kVA diesel generator is included to serve as a backup power source for periods of low solar generation or in case of battery depletion. It provides reliability and backup in the event of extended periods of cloudy weather or high demand. A 2,000-liter fuel tank is provided to store diesel fuel for the generator, ensuring continuous operation during extended periods of low solar or high demand. Additionally, PV Inverter: A 75 kW solar PV inverter is used to convert the direct current (DC) electricity generated by the solar panels into alternating current (AC) electricity suitable for consumer use. The estimated cost of the project is around USD 553,375.57, although this amount may change as more detailed plans are developed.

The project consists of two main components: Hybrid Mini-Grids and power line reticulation lines. The Hybrid Mini-Grids will combine solar panels and diesel power generation. These energy sources will be integrated through a centralized photovoltaic plant connected to a 3-phase AC busbar line. The configuration is designed to prioritize direct supply from the solar generator during daylight hours, reducing reliance on battery storage. The battery storage will primarily be used when solar generation is low or demand is high. The construction of power line reticulation lines will ensure the efficient distribution of electricity to residential, commercial, and other consumers, ensuring a reliable and efficient power supply.

To develop the Mini Grid, approximately 1.272 hectares of land will be compulsorily acquired by NLC. This land is part of the community's designated public purposes area. The Proponent engaged with the community during the land acquisition process, and there were no objections to transferring 1.272 hectares of land to REREC for the management of the solar mini-grid. In accordance with the World Bank's Operation Procedure 4.12 on Involuntary Resettlement, an abbreviated Resettlement Action Plan (A-RAP) was prepared, outlining the principles and procedures for land acquisition and compensation. This plan is annexed to the project report.

E.7 Project Alternatives

Solar energy is identified as a non-polluting and site-specific option, and the proposed site for Kanakurdio MG is chosen as the most suitable location for the mini-grid based on factors such as sunlight availability and the community's lack of grid connectivity. The use of wind power, thermal power, fossil fuels, and power import from neighboring countries are considered as alternative methods of power generation but are found to have limitations or environmental concerns. Solar energy is favored due to its low production costs, versatility, clean nature, and economic savings. The "No Project" alternative is deemed unfavorable as it would maintain the current lack of electricity access and hinder socio-economic development. The project will be constructed using modern materials and technology, with a focus on public health, safety, security, and environmental requirements. The technology will involve a Battery Energy Storage System.

E.8 Stakeholder Engagement

It is important to highlight that two forms of stakeholder engagement were carried out for the project. The first form as noted earlier, focused on the acquisition of land for

the project and involved the Proponent and the implementing agency (REREC). The second form of engagement was conducted specifically for the Environmental and Social Impact Assessment (ESIA) study.

For the ESIA study, various methods were employed to engage stakeholders, taking into consideration their different categories. Face-to-face discussions were held with government officials and key stakeholders, while separate focused group discussions were conducted with men, women, and youth. Additionally, a public baraza or meeting was organized to allow community members to participate.

During the ESIA stakeholder engagement public meeting, which took place on 20th of January, 2022, a total of 67 stakeholders attended. The meeting provided an opportunity to discuss project details, including the preliminary design, positive and negative impacts, and mitigation measures. Stakeholders were encouraged to share their views and provide feedback on the project.

Some of the concerns raised by stakeholders included the site's security, wages of the workers, the projects PAs, additional fees after the connection fee and cases of injury to a worker during construction phase. The study team addressed these concerns by assuring stakeholder that the contractor's insurance will cater for the bills in case of injuries/accidents and that the project will be inclusive of all vulnerable groups. Lastly, the payment will be determined in respect to the laws governing labours.

E.9 – Impacts and Mitigation Measures

The Environmental and Social Impact Assessment (ESIA) for the proposed Solar Mini-grid project has identified both positive and negative impacts across its different phases: pre-construction, construction, operation, and decommissioning. In the construction phase, positive impacts include local employment opportunities, boosting local businesses, and sourcing materials locally. During the operation phase, positive impacts encompass reliable power supply, economic improvement, education, health benefits, improved living standards, and enhanced security and communication. Similarly, the decommissioning phase offers positive impacts such as local employment and sourcing.

On the negative side, the pre-construction phase involves minor impacts like land acquisition, while the construction phase encompasses various minor to moderate impacts such as vegetation clearance, soil erosion, dust emissions, and occupational health and safety concerns. Challenges related to stakeholder engagement, labor influx, child labor, and exclusion of vulnerable individuals are also anticipated. In the operation phase, negative impacts include waste generation, increased oil consumption, fire outbreaks, occupational health and safety concerns, and inadequate stakeholder engagement. Issues of exclusion, inadequate grievance management, and public health concerns may arise as well.

During the decommissioning phase, negative impacts primarily relate to solid waste generation, noise and vibration, and challenges in stakeholder engagement, labor influx, child labor, gender-based violence, and exclusion of vulnerable individuals and households.

Tables 0-2 to 0-5 below present summaries of anticipated impacts and their corresponding levels of significance, both pre- and post-mitigation.

Table 0-1: Summary of Pre-construction Impacts

Impact	Significance Of Impact (Pre-Mitigation)	Residual Impacts (Post-Mitigation)
Land acquisition	Minor	Negligible
Way leaves	Minor	Negligible
Stakeholder identification and consultations	Major	Minor

Table 0-2: Summary of Construction and Decommissioning Phases Impacts

Impact	Pre-construction	Construction phase	Decommissioning phase
Impacts on Local and Economy and Employment	Not Applicable	Positive	Positive
Change in land use	Not Applicable	Moderate	Positive
Site rehabilitation	Not Applicable	Not Applicable	Positive
Topography	Not Applicable	Minor	Not Applicable
Soil environment	Not Applicable	Minor	Minor
Air Quality	Not Applicable	Moderate	Moderate
Ambient noise	Not Applicable	Minor	Minor
Visual intrusion and change in landscape	Not Applicable	Minor	Positive
Waste generation and soil contamination	Not Applicable	Minor	Minor
Impact on water environment	Not Applicable	Minor	Not Applicable
Impacts from hazardous materials	Not Applicable	Minor	Not Applicable
Fire hazards	Not Applicable	Moderate	Minor
Impacts of construction material sourcing	Not Applicable	Moderate	Not Applicable
Energy consumption	Not Applicable	Negligible	Not Applicable
Occupational safety and health	Not Applicable	Moderate	Moderate
Community safety and health	Not Applicable	Moderate	Moderate

Impact	Pre-construction	Construction phase	Decommissioning phase
Labor influx	Not Applicable	Minor	Minor
Child labor	Not Applicable	Minor	Negligible
Cultural heritage	Not Applicable	Minor	Not Applicable
Gender based violence, SEA and SH	Not Applicable	Minor	Minor
Exclusion of VMGs, Vulnerable individuals and households	Not Applicable	Major	Major
Risk of communicable diseases	Not Applicable	Minor	Minor
Increased water demand		Negligible	Negligible
Forced labor		Minor	Negligible

Table 0-3: Summary of Operation Phase Impacts

Impact	Significance Of Impact (Pre-Mitigation)	Residual Impacts (Post-Mitigation)
Impact On Economy and Employment	Positive	Positive
Quality, reliable power supply	Positive	Positive
Reduction of pollution associated with thermal power generation, kerosine and wood fuel usage	Positive	Positive
Education	Positive	Positive
Health benefits	Positive	Positive
Improved standard of living	Positive	Positive
Security	Positive	Positive
Communication	Positive	Positive
Soil environment	Minor	Negligible
Waste generation and management	Minor	Negligible
Water environment	Negligible	Negligible
Landscape and visual impacts	Minor	Negligible
Increased oil consumption	Minor	Negligible

Impact	Significance Of Impact Mitigation (Pre-)	Residual Impacts (Post-Mitigation)
Increased storm water flow	Minor	Negligible
Fire outbreaks	Moderate	Minor
Water demand	Negligible	Negligible
Sanitary waste	Negligible	Negligible
Flooding	Negligible	Negligible
Noise and Vibration	Negligible	Negligible
Electric and magnetic fields (EMFs)	Negligible	Negligible
Dust Emission	Negligible	Negligible
Vehicle Exhaust emission	Minor	Negligible
Collision and electrical hazards from distribution infrastructure	Minor	Negligible
Occupational safety and health	Moderate	Minor
Community safety and health	Moderate	Minor
Gender based violence, SEA and SH	Minor	Negligible
Exclusion of VMGs, Vulnerable individuals and households	Major	Minor
Risk of communicable diseases	Minor	Negligible
Shocks and electrocution to the PAPs	Moderate	Minor
Risks related to poor and inadequate stakeholder engagement (conflict)	Minor	Negligible

E.10 Environmental and Social Management and Monitoring Plan

A comprehensive set of mitigation measures in the form of an Environmental and Social Management and Monitoring Plan (ESMMP) have been prepared for the project. The ESMMP serves as a comprehensive framework for the integrated management of all environmental and social impacts throughout the project's lifecycle. It has been prepared to ensure that the social and environmental impacts and risks identified during the Environmental and Social Impact Assessment (ESIA) process are appropriately managed during the construction, operations, and decommissioning phases of the project. It specifies the mitigation and management measures that the project proponent and contractor are committed to implementing and outlines how organizational capacity and resources will be mobilized to achieve these measures. The ESMMP also ensures compliance with the relevant laws, regulations within Kenya,

as well as the environmental and social sustainability requirements of the World Bank's Operational Policies (OPs).

These measures emphasize a proactive approach, prioritizing prevention rather than reaction. They encompass various aspects such as proper waste handling and disposal to prevent pollution, engaging stakeholders to address grievances, providing personal protective equipment (PPE) for workers, ensuring adequate supervision, and emphasizing good workmanship from the contractor. Specific plans are also outlined to address specific issues that may arise. The ESMMP also highlights environmental performance indicators that should be regularly monitored. Monitoring serves as a means to detect and draw attention to any changes or problems in environmental quality. It involves continuous or periodic reviews of the ESMMP implementation progress, allowing for adjustments and improvements as necessary.

While accommodating the recommended mitigation measures to the extent practical and economically viable, the project proponent and contractor should ensure that the measures do not compromise the economic viability of the project or have long-lasting adverse impacts on the environment.

For the mitigation measures to be successful, it is imperative that proponent allocates sufficient resources for the implementation of the ESMMP. Adequate resources will enable the proper execution of the proposed measures and ensure their effectiveness in minimizing the identified negative impacts.

Following the project's commissioning, it is mandatory to conduct statutory Environmental and Safety Audits in accordance with national legal requirements. These audits serve to evaluate the environmental performance of the site operations and assess their compliance with the recommended mitigation measures.

E.11 Conclusion

Based on the assessment findings, the consultant concludes that there are no substantial reasons to hinder the proposed project from progressing to the next stage of planning and development. However, this progression is conditional upon the implementation of the recommended mitigations and the monitoring of potential environmental and socio-economic impacts as outlined in the ESMMP.

It is in the opinion of the Environmental expert that the anticipated negative impacts can readily and effectively be mitigated and on the whole the proposed project does not pose any significant threat to the Environment and may be licensed to proceed.

1 INTRODUCTION

The Ministry of Energy (MOE) Kenya is coordinating the implementation of the Kenya Off-Grid Solar Access Project (KOSAP) to provide access to clean and modern energy services through off-grid solar to 14 underserved counties. Mandera, Wajir, Garissa, Tana River, Samburu, Isiolo, Marsabit, West Pokot, Turkana, Taita Taveta, Kwale, Kilifi and Lamu.

KOSAP directly promotes the achievement of these objectives by supporting the use of solar and clean cooking Solutions to drive electrification of households (including host communities), enterprises, community facilities, and water pumps in Turkana County as one of the counties in Kenya that have been defined as “marginalized areas” based on the County Development Index (CDI) by the Commission on Revenue Allocation (CRA). According to the CRA as the communities in the marginalized areas have been excluded from social and economic life of Kenya for different reasons” (CRA, 2013).

Turkana County and other identified underserved counties, collectively represent 72% of the Country’s total land area and 20% of the Country’s population, including historically nomadic societies that even today continue to rely on pastoralism. Their population is highly dispersed, at a density four times lower than the national average. They present profound infrastructure deficits, including lack of access to roads, electricity, water, and social services. There is also significant insecurity in certain areas, giving rise to substantial numbers of displaced persons and livelihood adaptations that further undermine economic prosperity.

1.1 CONTEXT

This ESIA report has been prepared based on Site visit baseline survey, desktop survey, documentation review, consultation with stakeholders and in accordance Environmental Management and Co-ordination Act (EMCA), 1999 and its amendments; the Environmental Management and Coordination (Amendment) Act, 2015 and World Bank’s Environmental and Social Operational policies. The study has also assessed the requirement of the project with respect to the local and national regulations relevant to the project.

Norken International Limited in Joint Venture with Centric Africa Limited were appointed by Ministry of Energy to undertake consultancy services for the Environmental and Social Impact Assessment (ESIA), Social Assessment (SA) and Vulnerable and Marginalized Groups Plan (VMGP) as per the standard TOR and NEMA and WB Operational policies. The two firms are licensed by National Environment Management Authority (NEMA) to undertake environmental impact assessment studies. As reported, land acquisition has not resulted in any economic or physical displacement and no resettlement is envisaged for the proposed project.

Due to the remoteness and sometimes dispersed nature of the target populations and considering the lifestyles and socio-economic status of those residing in underserved Counties, the Project is designed to address low affordability of the potential users, and sustainability of service provision. Therefore, sustainability of the proposed approach to energy access expansion beyond the Nationally owned power network is predicated on two primary factors - public funding, local community participation; and institutional capacity of Kenya Power and, Rural Electrification and Renewable Energy Corporation (REREC) and the Ministry of Energy (MOE) as the implementing agencies.

The project components are:

- Component 1- US\$40M: Mini-grids for Community Facilities, Enterprises, and Households -This component will support electrification of areas where electricity supply through mini-grids represents the least cost option from a country perspective.
- Component 2- US\$48M: Stand-alone Solar Systems and Clean Cooking Solutions for Households; This component will support electrification of households using standalone solar systems in areas where load clusters do not exist and the best technical and financial solution is standalone solar systems.
- Component 3- US\$40M: Stand-alone Solar Systems and Solar Water Pumps for Community Facilities; This component will support electrification of public institutions and community facilities using standalone systems. This component will also support the installation of solar PV-powered water pumps for consumptive purposes.
- Component 4- US\$22M: Implementation Support and Capacity Building; This component will finance various technical assistance and capacity building activities to ensure the sustainability and measure the impact of the interventions devised and implemented within the other components of K-OSAP.

The MOE provides overall coordination of the project as well as lead in the implementation of components 2 and 4. Components 1 and 3 (a&b) will be implemented by the Kenya Power (KP) and the Rural Electrification and Renewable Energy Corporation (REREC).

1.2 PROJECT JUSTIFICATION

The Kenya Off Grid Solar Access Project (KOSAP) intends to support the Government initiative of ensuring increased electricity access to Kenyans, particularly among the low- income groups in off- grid areas. This proposed project is in line with the commitment of the Government of Kenya to reach 100% electricity access by 2023 through grid extension, stand-alone individual plant and autonomous solar mini- grids. Kenya Power as the implementing agency aims to to electrify areas that are not economically feasible through national grid extension. The Kankurdio site was proposed as part of this project due to its isolated nature and the high cost of grid extension to the area.

1.3 PROJECT OVERVIEW

The Project Site is located in Kaeris village in Kanakurdio sub-location-Turkana County at Latitude 03°48'36.348" N , 35° 28' 6.816"E. The proposed solar mini grid will be located on a 1.272Ha piece of land. The solar mini grid will comprise Solar panels, batteries, invertors, perimeter fence and 6.8 Kilometers distribution line to cover a radius of approximately 1.5 km. The project is expected to serve 259 consumers of which 252 are residential and 7 are non residential. The non residential include the Business enterprises within the area.

1.4 OBJECTIVES OF THE ESIA

The main objective of this ESIA was to examine both positive and negative effects of the proposed solar Mini-grid on the people, their property and the environment and proposed measures to mitigate the negative impacts and enhance positive impacts during the construction, operation and decommissioning phases of the project.

Specific objectives of the study included;

- Present an outline of the project background,
- Establish the environmental baseline conditions of the project area and review all available information and data related to the project,
- Identify key areas for environmental, social, health and safety concerns as well as the anticipated impacts associated with the proposed project implementation and commissioning,
- Undertake public consultations with the potentially affected peoples and other interested parties,
- Establish a comprehensive environmental management plan covering the construction, operation and decommissioning phases of the project,
- Preparation of a comprehensive Project Report in accordance with the local environmental legislation and submission to NEMA for further instructions and/or approval.

1.5 PURPOSE AND SCOPE OF WORK

This report discusses the environmental and social baseline within which the proposed solar power project is commissioned and assesses the potential adverse and beneficial impacts that the project could have, along with suitable mitigation measures and an Environmental and Social Management and Monitoring Plan (ESMMP) for the project. The report also evaluates the potential environmental and social risks associated with the project and recommends mitigation measures to avoid adverse impacts for the remainder of the project's lifecycle. The project has to comply with international standards (World Bank Environmental and Social Operational Policies) along with applicable national, and local regulations.

1.6 ESIA METHODOLOGY

1.6.1 Kick-off Meeting

The Consultant had a brief kick-off meeting with the Proponent on 12th July 2021

followed by subsequent online meetings and discussion on various aspects of the project up to 5th August, 2021. The meetings addressed varied deliverables and thresholds to be achieved and maintained during this assessment in terms of scope of work, deliverables, timeline and the methodology. All communication and meetings were done online.

1.6.2 Screening and Scoping

Evaluation of ESIA procedure has been undertaken as a fundamental procedure to implementation of the solar power mini-grid development project which is systematically mainstreamed into the project's Cycle. World Banks Social OPs underpin and demonstrate this commitment. The main aim of this is to enhance positive social opportunities and benefits as well as ensure that adverse social and environmental risks and impacts are avoided, minimized, and mitigated.

1.6.3 Desk based review and baseline assessment

A comprehensive description of the KOSAP Component 1: project includes a desktop review of all the existing project documentation provided by the Proponent including: the Project Appraisal Document (PAD) and the four main safeguard framework documents prepared under KOSAP- these are Social Assessment (SA), Vulnerable and Marginalized Group Framework (VMGF), Resettlement Policy Framework (RPF) and the Environmental and Social Management Framework (ESMF).

Other documents that were reviewed included Turkana County Integrated Development Plan 2018-2022, various Kenyan legal legislations, World Bank safeguard policies, topographical maps, google earth/maps, and Kenyan government publications among others.

1.6.4 Project Description

The consultant has concisely described the project location including its geographical, ecological and the general layout of associated infrastructure including maps at an appropriate scale where necessary. Location of all project related development sites, including proximal offsite investments; general layout; flow diagrams/drawings of facilities/operation design basis, size, capacity, flow-through of unit operations, including pollution control technology included if any; pre-construction activities and construction activities; construction schedule; staffing size and support; facilities and services around; commissioning, operation and maintenance activities and plan.

1.6.5 Baseline Condition

This entails description and collection of relevant primary data within the project site's bio-physical, socio-economic and cultural profile with respect to the biodiversity profile, land use types, cultural heritage and practices, social and economic issues likely to be affected, expected project activities to be involved during the design, construction and operation of the proposed facility. The information also includes description of the community social structure, employment and labour market, sources and distribution of income, cultural/religious sites and properties, vulnerable groups and indigenous populations. This also covers description of the sites' physical environment including their topography, land cover, geology, climate and meteorology, air quality and

hydrology. This entailed use of secondary data sources and for some specific environmental parameters the deployment of specialized equipment to measure and record the environmental readings as primary data for analysis and inclusion in the ESIA report. The ecological and biophysical environment will focus on describing the flora and fauna resident in the Turkana County and at the mini-grid site level. This was based on observation of flora and fauna, KPIs on local indigenous knowledge on historical and current status of rare, endemic and endangered plant and animal species known to occur in the project area. Vegetation assessment was done to gain an understanding of the mini-grid sites habitat type. This has provided for an in-depth description of existing land use type and their linked socio-economic activities. Interviews, discussions, photography, observations and check lists are some of the methods employed in gathering the data.

1.6.6 Impact Assessment (IA) Prediction

The anticipated impacts generated by the project and subsequent evaluation of their significance is provided by this report. A suite of field data collection methods was deployed including public forums discussions, Focus Group Discussions, Key Informant Interviews incorporating questionnaires for social risks assessment. Based on the outcome of the evaluation, the need for emphasis on critical areas was discussed. In order to accomplish this task an initial listing of the range of all issues and concerns identified during the study has been undertaken subsequently followed by analysis of the identified potential environmental and social impacts in terms of type (direct, indirect, cumulative, positive, negative), magnitude (local, widespread, random, severity) and duration (temporary, permanent, long term, short term). Consequently, an evaluation system was used to categorize these impacts and evaluate them. This aided in determining the significance of the identified potential impacts in relation to established criteria or standards, geographic extent of effects, cumulative nature of the impact, community tolerance and preferences, etc. This culminated into generation of a short list of the most critical issues in terms of environmental, ecological and social impacts both positive and negative associated which the different phases of the project activities that are likely to affect the baseline environmental and social conditions presently occurring at the mini-grid sites.

Socio-cultural risks linked to Component 1 of KOSAP were identified during the assessment. These include, Labour influx, Gender Based Violence, Sexual Exploitation and Abuse, workplace Sexual Harassment, Spread of HIV/AIDS, STDs & other communicable diseases, Gender biases and inequality exclusion of vulnerable and marginalized groups (VMGs) and vulnerable individuals and households from accessing project decision making and governance structures, engagement processes, opportunities and benefits. The vulnerable individuals and households identified included: the poor, elderly persons, PWDs, the sick, poor women, poor single mothers, child-headed households. The VMG's include ethnic minority communities that are present in Kanakurdio.

The impacts and risks were identified in relation to free, prior and informed comprehensive stakeholder consultations on land acquisition for construction of mini-

grid, contractor's facilities e.g., yard and workers camp site, way leave acquisition for the power line distribution network; restricted access to grazing lands, water resources, soils and tree resources, economic/livelihoods displacement etc.

1.6.7 Public Consultations

Section 17 of the Environmental (Impact Assessment and Audit) Regulations of 2003, requires that all ESIA Studies undertake Public Consultation (PC) as part of the study. The aim of the PC is to ensure that all stakeholders interested in a proposed project such as project PAPs, government officers and the general public in the vicinity of the proposed project be identified and their opinion considered during project planning, design, construction, operation and decommissioning phases. Consequently, public consultations were carried out in the project area in a bid to inform the public and other interested parties on the proposed project and obtain their views on the same. The consultations also presented an opportunity for the community to raise issues and concerns pertaining to the project.

Owing to the different categories of the stakeholders, the ESIA team opted to employ various methods in engaging them. The methods included; face to face discussions for the government officers and key stakeholders, focused group discussions with the men, women and youth and a public baraza/meeting for the community members.

1.6.7.1 Stakeholder Identification and Mapping

Stakeholder engagement and participation was carried out at different levels and with different stakeholders. Stakeholder's identification and mapping was done based on the following criteria that is project affected persons and interested parties. The stakeholders include;

- PAPs of the proposed project who largely are the community members living within 1.5 km radius of the proposed project
- Interested parties include
 - County Government of Turkana various department including the office of the governor, land and environment, survey and public administration such as ward and village administrators. In addition is the county commissioner and officers under his administration such as chiefs.
 - Members of parliament and members of county assembly

1.6.7.2 Mobilization for the Community Meeting

Prior to the community engagement meetings, a two weeks' notice was done/issued to inform the community members of the meeting. This was done by the county renewable energy officer (CREO). The officer called the Chief of the area where the meeting was to take place and requested him to inform the people of the meeting in regard to KOSAP community engagement forums. The chief then informed the people about the meeting through announcement by word of mouth given by the local leaders key among them was the chief and the village elders in Kanakurdio village.

1.6.7.3 Public Forum/Meeting

The project team undertook community engagement forums with the target PAPs and the communities where the solar Mini-grids will be set. The main objective was to explain the project details including need for land identification and solicit broad community support and acceptability of the project. One open meeting with all the community members was held. The KOSAP team explained to the community members about the project and other related information as discussed in the minutes. The meeting was then opened up for a plenary session.

Community engagement proceedings and resolutions are presented in form of minutes taken/written during the meetings. The meeting was well attended by all people including men, women, youth and persons with special needs.

1.6.7.4 Focus Group Discussions

After the meetings the community members were told of the need to have focus group discussions to discuss the project further and allow the different groups more opportunities to ask questions or give suggestions regarding the project. Therefore, three separate meetings for men, women and youth. In these meetings the message on the project was echoed again especially on benefits and impacts (both positive and Negative) of the project to the community, rights of the community and the need to have a grievance redress mechanism and committee with representation from all groups in the community.

1.6.7.5 Key Informant Interviews

Key Informants were identified both at the county and locational levels and they were interviewed to obtain baseline information in regard to the proposed project. The key informant interviewed was from the education, health and trading sectors.

1.6.7.6 Stakeholder Engagement Schedule

The ESIA team identified four categories of stakeholders namely; government officials, opinion leaders at local level, elders and the general community. Stakeholder engagement began early in the planning phases of the project. The stakeholder consultations were undertaken on the 20th January 2022. During these meetings, project information in terms of preliminary design, positive impacts, negative impacts, mitigation measures among others were discussed with various stakeholders. The stakeholders gave their views in to the project.

Interactive approach was adopted for the immediate neighbourhood in discussing relevant information key among them being;

- Land use aspects,
- Neighbourhood issues,
- Project acceptability,
- Social, cultural and economic aspects,
- Environmental Impacts
 - Physical impacts,
 - Biological impacts,
 - Legal Compliance.

1.6.8 Environmental and Social Management and Monitoring Plan (ESMMP)

The ESMMP as the implementation instrument of the ESIA has captured all the parameters that need to be monitored on a routine basis. The parameters are indicated in an Environmental and Social Management and Monitoring Plan (ESMMP) matrix, a detailed description of the implementation and monitoring program.

The ESMMP has a detailed arrangement of responsibilities for managing and monitoring the implementation of mitigation measures and the impacts of the project during pre-construction, construction, operation and decommissioning. This include: a description of monitoring methodology, specific operations, and features to be monitored, monitoring reporting relationships and arrangements to ensure that monitoring is effective. Simple and straightforward monitoring processes established for ease of implementation throughout the project cycle. This Plan follows through a description of the impacts and areas affected, key mitigation measures, monitor-able indicators, timeframe, responsibilities, and budget implications.

The ESMMP include an implementation schedule and budget cost estimates for the mitigation measures. It also describes institutional arrangements with regard to the implementation of the ESMMP among the implementing agencies, and the contractor(s). This has specific responsibilities, procedures and resources required by each institutional actor engaged in implementing the ESMMP.

The "Chance Find Procedures" has also been included in the ESMMP as part of prevention and mitigation measures that will be implemented in the event physical cultural resources are encountered during subproject implementation.

Additionally, the ESMMP has a component on contracting management that will ensure the implementation of the ESMMP by all contractors and subcontractors. A contracting mechanism is included in the ESMMP to incentivize contractors and their subcontractors to comply with the ESMMP or alternatively penalize them for failure to comply with the ESMMP. It also includes contractor clauses that will cover worksite health and safety, the environmental and social management of construction sites; labour camps/out of area workers, HIV/AIDS and other Sexually Transmitted Diseases (STDs), stakeholder engagement plans, grievance redress mechanism, child protection, gender equity and sexual harassment, labour rights and the employment of community members. The ESMMP also have a budget to guide the contractor on resources required for the implementation and monitoring of the ESMMP.

Figure 1-1 is a summary of the methodology the consultant adopted in undertaking environmental and social impacts assessment for the proposed Kanakurdio ESIA project.

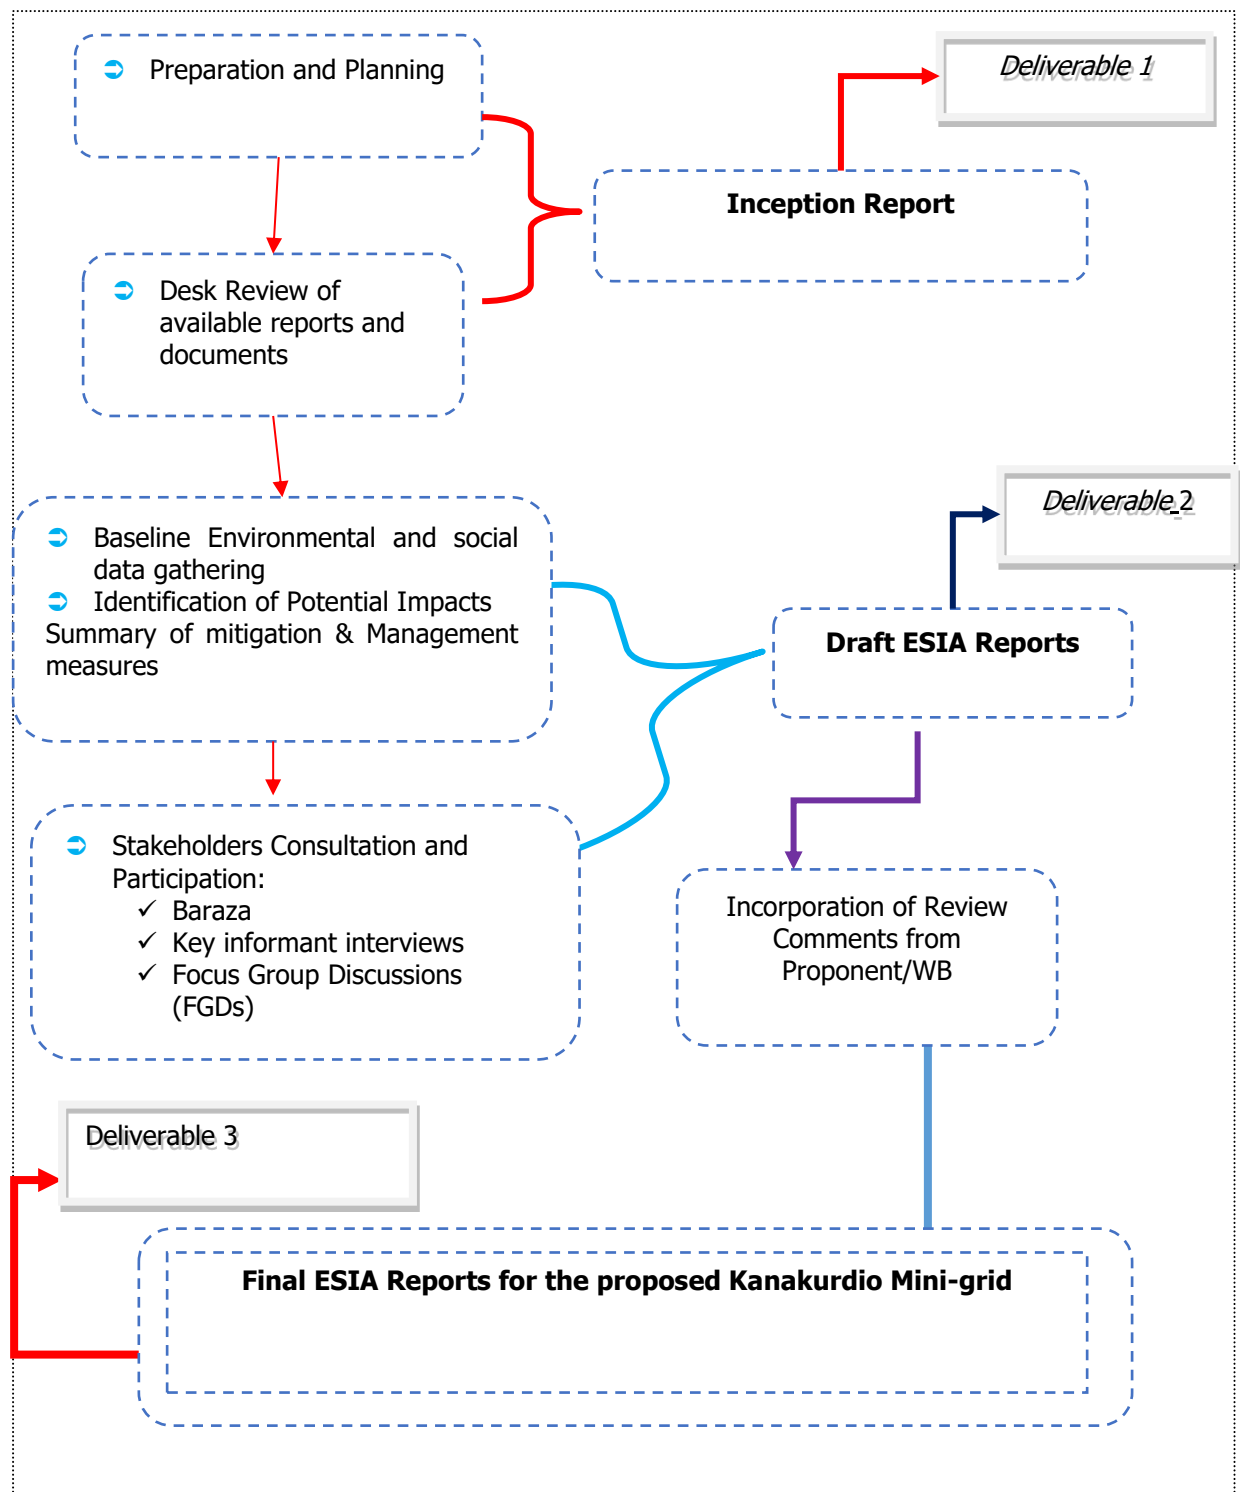


Figure 1-1: Summary of Environmental and Social Impact Assessment Methodology

The limitation experienced during the study are illustrated below.

- ✓ Some data which the consultants sought from the community could not be ascertained eg. the number of the VMG's, orphans, rate of HIV infections, number of cases of GBV etc.
- ✓ Limited information on some environmental aspects e.g. acquifers, rivers etc.
- ✓ Communication barrier with the community i.e. some people do not understand

Swahili or English. This was mitigated by use of a translator.

1.8 LAYOUT OF THE REPORT

Table 1-1 Structure of the ESIA Report

SECTION	TITLE	DESCRIPTION
Section 1	Introduction	Introduction to the Project and ESIA scope and methodology adopted.
Section 2	Project Description	Technical description of the Project & related infrastructure and activities.
Section 3	Baseline Setting- Physical and Socio-Economic Environment	Outlines Environmental, Ecology and Social Baseline status in the study area of the Project
Section 4	Baseline Setting- Physical and Socio-Economic Environment	Outlines Environmental, Ecology and Social Baseline status in the study area of the Project
Section 5	Stakeholder Engagement and Grievance Redress	Provides an overview of the stakeholder engagement activities undertaken during the ESIA, stakeholder categorization and profiling. Additionally, it details the provision of Grievance Redress Mechanism for the project
Section 6	Impact Assessment and Mitigation Measures	This section includes details of identified environmental impacts and associated risks due to Project activities, assessment of significance of impacts and presents mitigation measures for minimizing and /or offsetting adverse impacts identified.
Section 7	Environmental and Social Management and Monitoring Plan	Outline of the ESMMP taking into account identified impacts and planned mitigation measures and monitoring requirements.
Section 8	Impact Summary and Conclusion	Summary of impacts identified for the Project and conclusion of the study.
Section 9	References	List of references
Section 10	Appendices	

1.9 STUDY TEAM

This ESIA process was conducted by a team of experts that comprised the following professionals:

Team - 19/01/2022 - progressed the ESIA study.

S/No	Names	Position
1	Kenedy Shisoka	Ministry of energy

2	Lydia Komen	Norken International Limited /Centric Africa Limited-EIA/EA Expert
3	Allan Owino	Norken International Limited /Centric Africa Limited-EIA/EA Expert
4	Japheth kipsang	Norken International Limited /Centric Africa Limited-EIA/EA Expert
5	Umulkheir Abdi	Norken International Limited /Centric Africa Limited-EIA/EA Expert
6	Caleb Ewoi	Energy Officer- Turkana County Engineer REREC Turkana (creo)

2 PROJECT DESCRIPTION

2.1 INTRODUCTION

This section provides a description of the Project in terms of location, facilities and associated Project infrastructure and activities during the Project lifecycle. It also presents the potential impacts on resources and receptors that could result from Project activities during the pre-construction, construction, operation and decommissioning stages.

Table 2-1 below provides a summary of the pertinent information of the proposed Kanakurdio solar mini grid;

Table 2-1: Summary Information of the proposed Kanakurdio Solar Mini-grid

S. NO.	PARTICULARS	DESCRIPTION
1.	Project location	The project is located at coordinates latitude 03°48'36.348" N , Longitude 35° 28' 6.816"E
2.	Proponent	Ministry of Energy
3.	Administrative location	Kanakurdio sub-location, Kanakurdio location, Kaeris ward, Turkana North Sub-county in Turkana County
4.	Climatic condition	Turkana has a hot, dry climate with temperatures ranging between 20°C and 41°C and with a mean of 30.5°C. Rainfall in the area is bimodal and highly variable (Opiyo et al., 2015). The long rains occur between April and July and the short rains between October and November. Annual rainfall is low, ranging between 52 mm and 480 mm with a mean of 200 mm (Turkana County Investment Plan, 2016-2020).
5.	Average Elevation	2053 ft
6.	Site Conditions	The site is generally in open area with minimal fauna and flora.
7.	Road Accessibility	Earth road.
8.	River/canal/nallah/pond present in project footprint	None
9.	Protected areas (National Park/Sanctuary)/ Forest land within 10 kms	None

2.2 PROJECT LOCATION

The project site is located in Kanakurdio village in Kanakurdio sub location in Turkana North sucounty. Geographically, the site is located at 03°48'36.348" N ,35°28'6.816"E on unregistered community land. The proposed power MG will be constructed on

approximately 1.272 Ha of land 1.1 Km from Kanakurdio centre. The proposed project is situated about 80 km from Lodwar Town. Figure 2-1 below present the location of the proposed project site.

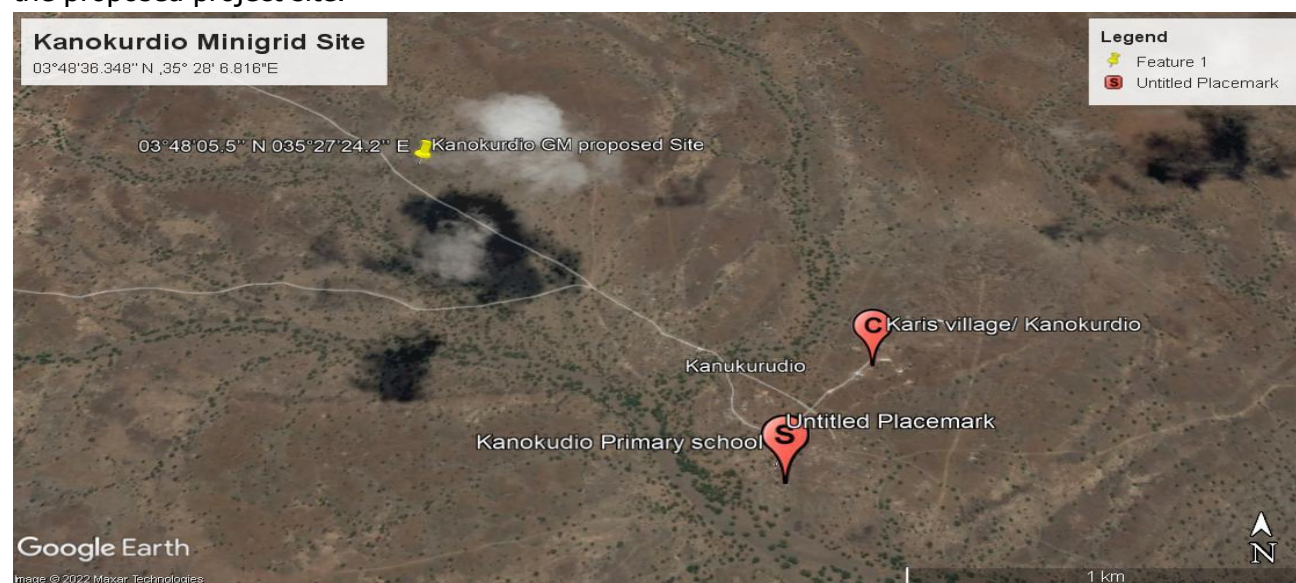


Figure 2-1: Project Location

2.3 DESCRIPTION OF PROJECT FACILITIES, COMPONENTS AND ACTIVITIES

2.3.1 Description of the Proposed Solar Mini-grid

Following comprehensive consultation during the preparation of the National Electrification Strategy with the County Governments, NGOS, CBOs and local communities, the government identified possible sites within 14 counties that would benefit from solar mini-grids. During feasibility study and mapping out of the possible project sites. Kanakurdio is one of the areas that was identified within Turkana the county.

Land was identified by the community for the construction of the proposed minigrid. Land is communally owned. During the consultations with the community, there was No objections raised in regard to transferring of land to REREC for construction of the solar mini-grid. According to aerial survey done in 2019 Kanakurdio had a potential customer base approximated at 259 households, and a 90KWp solar Mini-grid to supply power to the community will be installed. This will entail generation of electricity from solar and distribution of power within a 1.5-kilometer radius using wooden or concrete poles and retailing the same to the community. The total length of LV distribution network will be 6.8 Km. The community members will pay a connection fee of KES. 1000 for their houses to be connected with electricity. .

2.4 PROJECT COMPONENTS

2.4.1 Nature of the Project

The proposed project will be having two components in one that is a Hybrid Mini-Grids (PV- and Diesel) and construction of Power line reticulation lines. The following sections are explanations for each of the components that will be implemented.

2.4.1.1 PV Hybrid Mini-Grid Sizing

The power system has been sized based on the energy parameters. These are:

- The proposed Residential & Non-Residential Users available
- The PV Capacity in kilo Watt peak.
- The storage battery Capacity
- The Inverter capacity in (kW)

The system will be modular, so that it can be upgraded easily to meet future demand needs. The proposed power plant will be configured as AC coupled due to the significant portion of daytime loads that can be fed directly from the solar PV generator without intermediate battery storage. This will include:

- PV modules with PV inverters,
- Diesel Genset,
- Deep-cycle lead-acid electrochemical batteries with liquid electrolyte (largely used in off-grid applications thanks to its well proven technology at baseline costs compared with other types of batteries).

The proponent will be required to apply for a NEMA ESIA variation of the license, during the design changes over the project lifespan.

2.4.1.2 Architecture and Basic Design Specifications

This hybrid power generation site is projected to generate 75 (kWp) and is meant to serve between 200-400 households (customers). The proposed mini-grid installations will be built to comply the International Electro technical Commission (IEC) standards. It will have an installation of solar panels of with a capacity of 75 (kWp) and battery house with 188 kWh. The solar panels will have a connection to the batteries through underground cables. The standby generator will also be connected to the system as a backup.

This generator will be a capacity of 60 kVA capacity with a fuel tank. To optimize this hybrid system the HOMER software will be used. The goal of the hybridization of diesel systems is to reduce fuel consumption by switching off diesel generator set(s) for several hours a day, in order to reach a PV energy, share in the final mix of at least 60% or more. The power will be distributed to the customers by overhead lines. The project site is expected to serve clients within a radius of 1.5km from the site (generation source).

The PV plant and the battery capacity have been sized accordingly to the daily demand and the solar resources. In addition to this Design architecture, the project site shall have a site office that shall also have a Control Room adjacent as well as a guard

house. The guard house shall be constructed using concrete and masonry works whereas the control room and office can also be a containerized facility.

The Solar PV hybrid system is based on a centralized photovoltaic plant connected to a 3-phase 415V AC busbar line, where the multi-mode battery inverter and the diesel generator are also connected.

The plant is configured such that a significant portion of daytime loads is fed directly from the solar generator (grid-tie inverter) without intermediate battery storage usage. The solar PV power plant is also equipped with a Diesel Generator, which is normally used as reserve power. The diesel generator switches on automatically whenever the battery state of charge reaches a certain defined DOD (Depth of Discharge). The diesel generator comprises of 60 kVA unit in three-phase operation and it's equipped with automatic startup function controlled by the battery inverter charger. The table 2 below illustrates the preliminary data for the mini-grid in Kanakurdio.

Name	Residential	Nonresidential	Circuit(km)	Peak demand (kw)	Daily demand (KW)	Monthly demand (kWh)	PV(DC-KW p)	Gen set fuel Tank	Batteries	Generator (kva)	Cost (USD)
Kanakurdio	252	7	16	49	261	7840	75	2000	188	60	553,375.57

Key Components of the Project:

Power Generation Sources:

a) Low Voltage Power Distribution Network:

A kilometer Low Voltage (LV) power distribution network is established to distribute the generated electricity to the residential and nonresidential consumers. The LV network is designed to efficiently transmit power while minimizing losses, ensuring a stable supply to the customers.

- b) **Monthly Energy Demand:** The project is expected to meet a total monthly energy demand of 7840 kWh.
- c) **Daily Energy Demand:** The average daily energy demand is approximately 261 kWh, ensuring a consistent supply for the consumers.
- d) **Peak Demand:** The peak demand of the system is 53 kW, which is the maximum power requirement during any given moment.
- e) **PV Capacity:** The solar photovoltaic panels have a total capacity of 49 kWp.
- f) **Battery Capacity:** The Battery Energy Storage System has a capacity of 188 kWh, providing energy storage and ensuring a continuous power supply.


g) **Generator Capacity:** The diesel generator has a capacity of 60 kVA, serving as a backup power source.

h) **LV Network Length:** The low voltage distribution network spans a length of 16 kilometers, connecting consumers to the power source.

i) **Estimated Project Cost:**

The estimated cost of the Kanukurdio Mini Grid project is approximately USD 553,375.57. It's important to note that this cost may be subject to change as more detailed plans and implementation phases are developed. The investment is expected to provide long-term benefits to the local community, improving their quality of life, economic opportunities, and access to modern amenities.

Figure 3: Illustration sketch of the proposed design of the proposed project

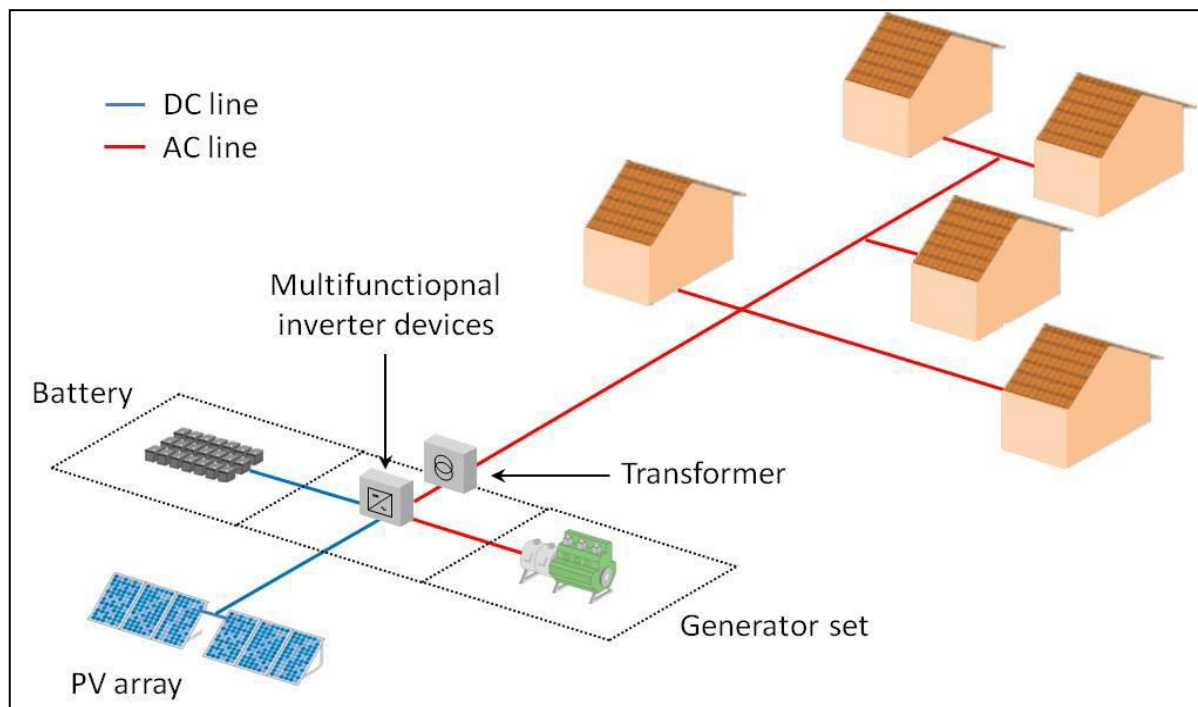

2.4.1 The PV Generator

The project utilizes solar panels with a total capacity of 75 kWp to harness solar energy. Solar power is a clean and renewable energy source that will provide a significant portion of the electricity needed for the project.

The PV generator consists of Silicon Crystalline Photovoltaic modules of capacity at STC of 250 Wp or more. The PV modules should comply with the norms IEC 61215 and IEC 61730. The outside junction box with the positive and negative terminals shall incorporate bypass diodes that have the function of preventing any possibility of the

electrical circuit inside the module being broken due to the partial shading of a cell and shall be at least IP 65 and UV resistant.

The module support structure shall be ground-mounted on arid soil with a base made of concrete. The support shall have a tilt angle between 10° - 15° from the horizontal. No soil tests have been performed, at this stage of the proposed project design, but from the site inspection during the pre-feasibility study, ramming or screw foundations could be used. The support frame shall be of either lightweight aluminum or galvanized steel and it shall be easy for installation, maintenance and disassembly at the end-of-life cycle. These materials will be possibly sourced locally or from abroad and shipped to Mombasa port and transported via road to the site town.

Cables used within the PV generator shall have a voltage rating of at least 1,2 VOC; have a temperature rating higher than 40°C above ambient temperature; they will be UV-resistant; water resistant and it is recommended that they be flexible (multithreaded) to allow for thermal/wind movement of modules. The PV inverter shall be of type current source grid-tied to convert DC to an AC Sinusoidal current. String inverters shall be installed indoors or outdoors with a cover and suitable for desert conditions with high ambient temperatures and dust.

2.4.2 Powerhouse

The Battery, Multi-mode inverter and all monitoring equipment will be installed indoors with adequate air ventilation accordingly to the manufacturer's recommendations. Thus, a powerhouse or a containerized solution, considering the equipment manufacturer's recommendations shall be installed. All electrical boards and LV protections will also be installed indoors. The batteries will be installed in the powerhouse in a separate room, specifically for their use and meeting the electrical safety requirements according to its voltage class.

2.4.3 Multi-Mode Inverter

Inverters and Chargers:

PV Inverter: A 75 kW solar PV inverter is used to convert the direct current (DC) electricity generated by the solar panels into alternating current (AC) electricity suitable for consumer use.

Battery Inverter Charger: A 60 kW battery inverter charger is employed to manage the energy flow to and from the battery storage system. It ensures efficient charging and discharging of the battery, maximizing the system's overall performance.

The Inverters shall be designed for continuous, reliable power supply as per specification and shall have internal protection arrangement against any sustained fault in the feeder line and against lightning strikes in the feeder line. The inverters shall be capable of complete automatic operation including wake-up, synchronization & shut down independently & automatically.

2.4.4 Battery Energy Storage System

A 188 kWh Battery Energy Storage System is incorporated to store excess solar energy during the day, ensuring a consistent power supply even during cloudy or nighttime conditions.

The battery considered is lead-acid, deep discharge type with a permissible repeated deep discharge without damage. Automotive or starting type batteries are not acceptable. It shall be of the open "vented" OPzS type with recombination caps and transparent enclosure for easy inspection of electrolyte level.

OPzS stands for:

O = Ortsfest (stationary)

Pz = PanZerplatte (tubular plate)

S = Flüssig (flooded).

Other batteries can be considered:

1. OPzV type, "gel" lead-acid batteries are "maintenance less" but the unit weight is higher and the lifetime is sensitive to high temperatures.
2. Li-ion batteries, have longer lifetime, are lighter and smaller. But they have a higher investment cost and are not adapted to high air temperature so that an additional active cooling system is needed.

The batteries must be manufactured according DIN 40736-1: "Stationary batteries with tubular positive plates. Capacities, measurements and weights". The battery array will have 12 batteries.

1. Battery Rating

The battery nominal voltage does not need to be established at this stage and different technology providers may offer different solutions on this issue. Nevertheless, it must be noted that the voltage class, either ELV or LV, will determine the electrical isolation and accessibility requirements of the battery room. The battery shall have at least the rated capacity of 2.16V at the C10 discharge rate according to DIN 43539-9.

2. Battery Performance

The battery shall have a self-discharge when new of less than 5% per month (at 25°C and fully charged) of its rated capacity and shall have a Coulombic efficiency of at least 85% and energy conversion efficiency of at least 85% when new and charged to more than 50% of capacity. The battery cycle life for discharge/charge regular cycles down to 80% DOD shall be more than 1500 cycles (According to IEC 896-1).

3. Lifetime

The design lifetime of the batteries shall be of at least 8 years without losing more than 10% of the rated C10 capacity. When the batteries get damaged, they will be stored separately at the site and then transported to Nairobi for proper disposal.

4. Battery Cabling and Protections

The battery connection point shall be as close as possible to the Multi-mode Inverter. Cables used to connect the battery shall have a temperature rating higher than 20 °C above ambient temperature. It is recommended that they be flexible (multithreaded) to allow for easy installation and maintenance. Fuses in cables that connect

components to the battery shall be rated for D.C. use, be installed separately as close as possible to the battery terminals and rated to interrupt high fault currents from the battery. A neutralization kit will be provided at the site to manage any battery acid spills that may occur.

2.4.5 Diesel Generator

The proposed Diesel Generator Set shall have a capacity of 27 kVA (200 kW) with an output of 400 V /230 V @ 50 Hz and 1500 r.p.m. The rated consumption will follow a 0.25 L/h/kW curve at stand-by power. It should include a highly corrosion resistant enclosure, control panel and monitoring, fuel tank and circuit breaker protections. The Diesel Genset shall be suitable for indoor or outdoor installation and shall perform accordingly with Multi-mode Inverter and the mentioned architecture model. The Diesel Genset shall be working in a fully automatic manner with the above stated components. The diesel gensets will have base mounted fuel tanks that will be factory tested for leaks. There will also be an external reserve fuel tank with a capacity of not less than 500 liters. The proponent, through the operating entity will have regular inspection by the manufacturer. The noise rating for the generator set will be 75dBA @ 1 meter at 75% load under free field conditions. The generator sets will have a high-quality noise absorbent and fire-retardant grade acoustic insulation material complying to IS 8183.

2.4.6 Distribution Line and Energy Meters

Kanakurdio site will have a distribution line circuit of 16 km in total. Electricity distribution from the generation plant to the end consumers will be done by means of a distribution line formed by low voltage (LV) line. The site is infested by termites that would eat the wooden poles and therefore, concrete poles are recommended for the distribution of electricity. Supply of concrete poles will be based on detailed survey and accessories like phase plates, circuit plates, number plates, danger plates, anti-climbing devices as per KP requirements/specifications. Erection of the Poles, fixing of insulator strings, stringing of conductor and earth wires along with all the necessary line accessories and earthing will be as per requirements and specifications.

The electricity distribution from the generation plant to the end consumers will be done by means of a distribution line formed by low voltage (LV) line at 415V for three phase and 240V for single phase. All lines shall be over-head mounted on concrete poles or eco poles. The project implementing agency and KPLC will seek way leaves for the LV lines which will run along road reserves and boundaries within the supply area.

2.4.7 Cable Requirements

The cables used in the site shall fulfil these requirements:

- The cables shall be suitable for laying on racks, in ducts, trenches, trestles, conduits and under-ground buried installation with chances of flooding by water.
- All cables of module area if laid on cable trays shall be covered. If cables are to be laid underground, laying shall be as per latest relevant code.

- Cables with Copper conductor on DC side & that with aluminum conductor in AC side to be used as power cables shall have tensile strength as per relevant standards. Conductors shall be stranded.
- Cables with XLPE insulation, PVC sheathed & armored suitable for a continuous conductor temperature of 90°C and short circuit conductor temperature of 250°C shall be used.
- PVC insulation shall be suitable for continuous conductor temperature of 70°C and short circuit conductor temperature of 160°C.
- Only terminal cable joints shall be accepted. No cable joints to join two cable ends shall be accepted.
- Cables inside the control room shall be laid in suitable Cable Trays of approved type.
- Cable terminations for LT cables shall be made with suitable cable lugs & sockets etc. crimped properly and passed through brass compression type cable glands at the entry and exit point of the cubicles.
- The panels' bottoms shall be properly sealed to prevent entry of snakes / lizard etc. inside the panel.
- The terminal end of cables and wires are to be fitted with good quality letter and number ferrules of proper sizes so that the cables can be identified easily.

2.5 RESOURCE REQUIREMENT

2.5.1 Workforce Requirement

The Solar Mini-grid will be installed, operated and maintained by the O&M contractor on behalf of REREC for the first seven years and then handed over to REREC engineers and operators.

2.5.2 Water Requirement and Source

2.5.2.1 Construction Phase

Water will be required on a daily basis for civil works and for workers at the project site. However, the quantity of water required will vary depending on the duration of construction and the mobilisation of construction workers at site.

2.5.2.2 Operation Phase

The water required during operation phase of the project will be mainly for washing the face of the solar modules, minimal water will be used for this purpose. The quantity of Water requirement during operational phase of the project is not known at this stage of the project.

As noted previously, approximately, employees (direct and contractual) will be working during operation phase. For this workforce, approximately 10,000 Litres storage water tank will be required for domestic consumption.

2.5.3 Raw Material Requirement

2.5.3.1 Construction Phase

The major raw materials required for the construction phase will be solar modules,

fencing materials, construction materials like cement, sand and aggregate. The fencing materials and the construction materials will be sourced from the local hardware facilities. Solar Modules for the project along with associated structures will be obtained from suppliers in the Country or if not available imported from suppliers outside the country.

2.5.3.2 Operation Phase

There will be no major requirement of raw materials during operation phase. Only maintenance spares will be required at this phase.

2.5.4 Power Requirement

Power requirement during the construction phase will be met through Diesel Generators sets. The exact number of Diesel Generator sets to be used, as well as the quantity of fuel, will be ascertained once the project design is finalized.

2.5.5 Fire Safety

2.5.5.1 Construction Phase

Appropriate firefighting system and equipment shall be provided throughout the construction period. The fire extinguishers will be well distributed according to the fire risks and will be available in areas such as the site office, security area, storage yard etc. A comprehensive emergency response plan with all the emergency numbers will be well displayed at the project site.

2.5.5.2 Operation Phase

Suitable fire protection and fighting systems that will include portable fire extinguishers, automatic fire detection system and means of fire communication will be made available at the entire PV array area, inverter stations, main control room and switchyard.

The systems and equipment's will align to the Kenyan Fire Reduction Rules of 2007. The Fire protection and fighting systems will be maintained and serviced after every 6 months. The team managing the site will be trained on Fire safety as per the requirement on Fire Risk reduction rules. Further the proponent will be required to undertake Annual OSH Audits, Fire audits and Risk assessment as per the requirement of OSHA 2007 and the relevant subsidiary legislation.

2.5.6 Electrical safety

The Contractor shall ensure that all safety equipment such as safety helmet, shoes, gumboots, dust respirator, hand gloves etc are available at the site and shall take adequate steps to ensure the proper use of the equipment at all times.

2.5.7 Access to the Site

It is proposed that the Kanukurdio Solar Mini-grid will have one access road, which will be designed according to KPLC's and REREC standards, taking into account the Ministry of Road's requirements. The Solar Mini-grid will be accessed via the existing murrum

road. However, a proper access to the site and drainage will be constructed to safely access the Mini -grid site and to avoid flooding.

2.5.8 Security

Providing and maintaining appropriate levels of site security benefits both the contractor, community, workers at the site and the minigrid. Security at the site is influenced by local, legal, social and geographical exposures of the location.

Security risks vary according to the construction type and site location and can originate not only from the external population but also from the project's own workforce. The following are security related to threats at the minigrid;

- Theft of equipment's and/or tools
- Theft of fuel
- Theft of materials from the site or off-site project storage areas
- Vandalism
- Arson
- Breaches of security into partially completed project areas.
- Robbery of or attacks on construction workers
- Trespassers: both accidental and intentional
- Protesters (either related to the site activity or simply for publicity)

The consultants carried out security assessment and the following are major factors to be considered to mitigate on security at the site:

2.5.8.1 Installation of CCTV

Closed-circuit television (CCTV) Security cameras are one of the most important components of the minigrid safety plan, security cameras will be installed at strategic positions at the site to enhance their effectiveness in monitoring of the entire site. Presence of these cameras will deter intruders and prevent burglaries at the site as it will actively deter theft and record what is happening

Security cameras will cover the entire site perimeter and interior locations of the PV array area, inverter stations, main control room, switchyard and building housing the generators. The surveillance system should be monitored by a listed or approved central station alarm monitoring service.

2.5.8.2 Perimeter Fencing

Chain link fence will be installed to secure the minigrid site. This kind of fencing is preferred for its economic advantages, durability and affordability.

2.5.8.3 Security guards

Four security personnel from the community will be employed to man the site throughout the phases of the project. Two will guard the site during the day and two at night. The guards will be responsible to maintain workers and visitor register and ensure the safe departure. They will be trained on how to respond in the event of an incipient stage fire, including emergency notification of local authorities. They will be equipped with suitable communication devices (radio, wireless telephone, etc.) incise of an emergency.

The site is in an area that is basically open and in close proximity to residential homes and a public facility. This calls for proper security measures to be put in place to protect both human and domestic animals from accessing the Solar Mini-grid site. Therefore, the Mini-grid will have a chain link fence to keep off the electrical installation away from access by unauthorized persons or animals. A gate will be constructed at the entrance to the site which will be locked at all times. The Mini-grid will be lit at night, and a photocell will be used to automatically switch on the lights at a set time each evening. The Mini-grid will also be guarded at all times by two security guards during the day and two guards at night.

2.5.9 Vegetation Undergrowth

Concrete will be used on surfaces where it is required leaving the rest of the areas covered with vegetation. Vegetation undergrowth will be managed by regular lashing and cleaning up of the site compound.

2.6 ANALYSIS OF ALTERNATIVES AND PROJECT JUSTIFICATION

This section analyses the project alternatives in terms of site and technology. Solar projects are non-polluting energy generation projects which are site specific and dependent on the availability of solar irradiance resource. The current site selected is a high solar power potential site with high irradiation and consistent sunny days throughout the year.

2.6.1 Present Power Supply Position

According to the Turkana County Integrated Development Plan (2018-2022), the main challenges faced by the energy sector include poor transmission and distribution infrastructure, the high cost of power, low per capita power consumption and low countrywide electricity access. Only about 2% of the county's households have access to electricity. Households mainly rely on firewood, charcoal, paraffin and solar lanterns for their lighting and cooking needs, with firewood being the main source of energy. According to Kenya National Bureau of Statistics (KNBS) and Society for International Development (SID), 2013, the potential for investment in renewable energy sources is high given that the county receives over 6 hours of sunlight.

2.6.2 Alternate Location for Project Site

In determining the most appropriate site for the establishment of the minigrid, several options were explored. This site selection process considered the following criteria:

- a) Geophysical Factors-Proximity to Hills-Shade effect, Soil erosion, Drainage of the area, Flooding etc.
- b) Land identified is free from any dispute on ownership or any other encumbrances
- c) Proximity to public utilities-Schools, Dispensaries, Places of worship and community settlements
- d) No squatters, encroachers or other claims to the land

- e) 5. The Size of the Mini-grid to be constructed and the optimal coverage of a Mini-grid in terms of the number of people to be reached.
- f) The Land identified should be on spaces set aside for public use within the community centres.

Kanakurdio was identified as the most suitable area for the establishment of the proposed minigrid based on the above.

2.6.3 Alternate Method of Power Generation

The possible alternatives to electrical energy could be solar power, wind power, thermal power, fossil fuel and firewood. Power import from neighbouring countries is another option. Wind power is also a source of clean energy.

The problems in operation of wind power are lack of time series data of wind, trained human resources to intricate design of wind power etc. In addition, providing wind power for Kanakurdio residents is technically and financially challenging.

Thermal power plants are associated with serious environmental problems like air pollution, waste pollution, noise pollution, temperature pollution etc. Besides coal and petroleum products, the basic input required for the conventional thermal power plants will have to be imported. Therefore, thermal power option based on coal and petroleum products is not a viable option for Kanakurdio.

The use of firewood and solid waste for electricity generation by the use of thermal technology is another option. But the issue of air pollution and forest degradation already are environmental problems of serious concern which will further aggravate the natural environment. For these reasons, the thermal power options evaluated above seem inappropriate for Kanakurdio on environmental as well as economic grounds.

Solar energy was a desirable option because:

- It has low energy-production costs
- Versatile installation
- It is a clean source of energy hence minimal impact on the environment air quality
- Economic savings.

2.6.4 Zero or No Project Alternative

The No Project option in respect to the proposed project implies that the status quo is maintained. This option is the most suitable alternative from an extreme environmental perspective as it ensures non-interference with the existing conditions. This option will however, involve several losses to Kanakurdio as a whole. The village and the surrounding area will continue to have no electricity and this will not help in maximizing and utilizing the area facilities. The No Project Option is the least preferred from the socio-economic and partly environmental perspective due to the following factors:

- The economic status of the local people would remain unchanged.
- Employment opportunities will not be created.

From the analysis above, it becomes apparent that the zero project alternative is no alternative to the local people, Kenyan Government and Investors.

2.6.5 Analysis of Alternative Construction Materials and Technology

The proposed project will be constructed using modern, locally and internationally accepted materials to achieve public health, safety, security and environmental aesthetic requirements. The materials will include all consumables, tools, testing instruments or any other equipment required for successful commissioning of the project. These may not be desirable from a cost and durability perspective. The technology to be adopted will be the most economical and one sensitive to the environment. The technology will involve a Battery Energy Storage System (including battery inverter and charger).

3 BASELINE SETTINGS – PHYSICAL AND SOCIO-ECONOMIC ENVIRONMENT

3.1 AREA OF INFLUENCE

The Area of Influence (AoI) of the project comprises of the project site and the surrounding area, where the influence of the project activities is anticipated. The areas likely to be affected by the project and its associated activities include:

- The areas where project activities and facilities operated and managed by the Ministry of Energy, REREC will be established,
- Project site where project components such as solar modules, control room and transmission line to power grid sub-stations; and any other selected compensation in kind project, such as the construction water abstraction and distribution points will be established
- Areas where impacts from unplanned but predictable developments caused by the project that shall occur later or at a related location such as increase in traffic on the approach road;
- Areas where there is biodiversity or on ecosystem services upon which affected communities' livelihood are dependent; and
- Areas where associated facilities will be established e.g., approach road construction and widening of existing road.

Further to this, the AoI with respect to the environmental and social resources was considered based on the following reach of impacts:

Air Quality

- Impact on ambient air quality from vehicle exhaust;
- Impact of air pollutants emission from construction activities and
- Dust fall- typically up to 200 m from construction activities

Noise

- Noise impact area (defined as the area over which an increase in environmental noise levels due to the project can be detected) - typically 500 m from operations and 200 m from the access road

Water

- Surface water body- typically 500 m upstream and downstream of water intake point and downstream of discharge point
- Other surface water bodies within 1 km of the project footprint
- Groundwater in 1-2 km radius of project footprint

Flora and Fauna

- The direct footprint of the project comprising the project site
- The areas immediately adjacent to the project footprint within which a zone of ecological disturbance is created through increased dust, human presence and project related activities (e.g., trampling, water intake/outfall, transportation). This kind of disturbance has been estimated to occur within the project

footprint and surrounding areas of about 500 m to 1 km from the activity areas. Based on the above the AoI for environmental studies was limited to 5 km from the project site.

Socio-economic/Social

The AoI for social receptors was fixed to include 2 km radial zone which has been developed based on the reconnaissance site visits and stakeholder consultations with the local community. The AoI for development of the social baseline is within Kanakurdio Village which according to the administrative structure falls within Kanakurdio Location. The socio-economic information presented in this report has drawn from primary socio-economic survey and the Population and housing census 2019, Kenya Bureau of Statistics (KBS).

3.1.1 Project Footprint Area

The project falls in Kanakurdio village, Kaeris Ward, Turkana North sub-county in Turkana County. The site is relatively flat; however, the surrounding areas within the location has undulating slopes.

3.1.2 Study Area

Locations of ecological and social surveys were also selected based on receptor locations; in addition, special emphasis is given to areas within 1.5 km radius of the project site and distribution lines. Based on the secondary information of the region, the following baseline information on environment, ecology and social has been discussed under the sections below:

3.2 PHYSICAL ENVIRONMENT

3.2.1 Geology and soils

The county has sandy soils that support scattered shrubs and grasslands which are ideal for livestock production. The county's land is highly erodible. The exploitation of the soil resource thus must take into account conservation measures due to their fragile nature. The mineral potential of the soils is not exactly known as no geological mapping has been done.

3.2.2 Topography

The topography of Turkana varies between semi-arid and arid landscapes consisting of low-lying plains and isolated hills and mountain ranges (Opiyo et al., 2015). It rises from a low altitude of 369m at Lake Turkana to 900m near Uganda border in the west.

3.2.3 Project area Flora and Fauna

The Plant species identified at the project area surrounding during ESIA study were; *Balanites pedicellaris* (Elamash), *Borscia coriacea* (Edung), *Dobera glabra* (Edapal), *Ficus* sp. (Echoke), *Grewia bicolor* (Epat), *Maerua subcordata* (eerut), *Acacia nubica* (Epelet), *Acacia senegal* (Ekunoit), *Balanites orbicularis* (Ebei), *Cordia sinensis*

(Edome), *Dobera glabra* (Edapal), *Fiscus* sp. (Echoke), *Grewia bicolor* (Epat), *Grewia tenax* (eng'omo), *Maerua subcordata* (eerut), *Salvadora persica* (esokon), *Tamarindus indica* (Epederu), *Zizyphus mauritiana* (Ekalale) and *Acacia tortilis* (Ewoi). The proposed site falls mainly within arid and semi-arid lands. The area is characterised by semi-arid conditions. The area is mainly semi-arid with sparse vegetation mainly indigenous shrubs and a few ewoi trees.

No wild animals were observed at the site. The area and its environs are not a known breeding site for any endangered species. The site does not present natural ecosystem for wildlife habitation. The project area is largely pastoral land which is a major form of livelihood for the local community. Some of the livestock include cows, goats, sheep, donkey, chicken and domestic pets such as cats and dogs. Other animals found in the project area are common ostrich, snakes etc. as mentioned by the community members. No other notable wild animals were sighted in the area.

There is also diversity of bird life in the area mostly concentrated in shrubs vegetation including stuthio Camelus), African Cuckoo (*Cuculus Gularis*), lappet-faced vulture, isabelline wheatear among others.

3.2.4 Hydrogeology and Drainage

A water catchment is an area that shares one outlet point for surface runoff or base flow. The Food Security Master Plan for Turkana outlined the major watersheds for Turkana including runoff water (Oduor et al 2012). There are nine major catchment areas in Turkana County, ranging from 543 ha² with a potential runoff of 27 Mm³, to 14,127 ha² with a potential runoff of 1,465 Mm³ (Turkana Food Security Master Plan 2012).

The two main perennial rivers are the Kerio and Turkwel. River flow in each is influenced by the rainfall patterns in their catchments. The rivers also receive runoff from ephemeral streams (laghas). A dam built for hydro-power generation at upper Turkwel River from 1986 to 1993, releases a perennial flow into the river with an annual discharge around 300 Mm³ per annum (GIZ 2014).

3.2.5 Water Resources

With regard to water quality in Kanakurdio, water is sourced from a Community borehole and Sand dams small dams constructed across ephemeral streams. During the rainy season, water is stored in the sand that accumulates behind the dam. The water from the borehole is considered clean by the locals and utilizes it for drinking and domestic uses but is saline. Water in the sand dams are meant for the animals.

3.2.6 Ambient Air Quality

The proposed project area which can be described as generally rural with interfaces of natural vegetation. Most of the areas are vegetated and there are no major industrial developments. The air quality at the proposed project sites is therefore considered to be generally good.

3.2.7 Ambient Noise Quality

In general, the project area is a rural setting where the main source of noise is from motorists and from machines such as the generators used to supply power. The noise quality of Kanakurdio is considered to be within the Kenyan limits for a mixed residential zone.

3.2.8 Soil Type

The soil at Kanakurdio is mostly sandy. The soil drains excess water and cannot hold significant amounts of water or nutrients for plants

3.3 SOCIO-ECONOMIC ENVIRONMENT

3.3.1 Demographic Profile

The demographic profile in terms of total population, number of households, household size and sex -ratio of the selected villages surveyed in study area has been discussed in section below:

According to Kenya Population and Housing Census (KPHC) 2019 Turkana county had a population of approximately 926,976. The Study Area- Kanakurdio has a population of 1500 people with about 200 households with an average of 7 people per household. The gender ration is currently estimated to be about 40% males and 60% females. Below is a summary of demographic profile of Kanakurdio. It was noted population within study area has increased, this is attributed to lack of birth control measures and early marriages.

Table 3-1 below presents a summary of demographic profile of Kanakurdio.

Table 3-1: Summary of demographic profile

Approx. population	1500
Households	200
Gender.	Male – 40% Female – 60%
Ave. No. per household	7 per household
Dominant ethnic group	Turkana
Other community	Somali
Primary religion	Christians

3.3.2 Educational Infrastructure

As per the observation and information sought from Kanakurdio Location, the area has one school; Kankurdio primary school. Most of the young people below 18 years of age can generally read and write while most of those above that age cannot. It is anticipated that the school will benefit from the project by getting connected to the

reliable electricity once the project has been implemented.

3.3.3 Access to health

The village is served by Kanakurdio dispensary that was reported to be under staffed during the FGDs. Despite its condition, the residents prefer the dispensary as compared to the traditional methods of treatment. The dispensary is currently served by 4 staff- a midwife, , a community health extension worker and 2 assistants. The main health issues include:

For children:

- Typhoid
- Diarrhea
- malnutrition

For women:

- Pneumonia
- Malaria
- Anemia

For women:

- UTI-Urinary Tract Infection
- Arthritis
- Brucellosis

The dispensary will be connected to the electricity once the project has been implemented enabling them to use medical equipment that they cannot currently use, and that will improve healthcare in Kanakurdio.

3.3.4 Occupation and Livelihood Profile

The community is mainly pastoralist that move with livestock in search for pasture and water. They also practice crop farming during the rainy season. Other sources of income in the society include retail businesses. The project will bring direct job opportunities to the locals during the construction phase and other indirect forms of employment throughout the cycle of the project. The indirect job opportunities include new retail businesses being started and the improvement of the current ones.

3.3.5 Land and Land Use

Land in the community is mainly communal and is used mainly for livestock grazing of goats, sheep, cows and camels.

The portion of land identified for the Mini-grid by the community is on a community land set aside for public use measuring approximately 1.272 Ha in Kanakurdio sub-location, Kanakurdio location, Kaeris ward, Turkana North subcounty and in Turkana county. Consultations with the community indicated that the land is purely set for social services projects. No objections were raised by the community in regard to transferring land (1.272 Ha for the mini-grid) to REREC for management of the solar mini-grid.

An abbreviated Resettlement Action Plan (A-RAP) outlining the principles and procedures for land acquisition and compensation is annexed to this ESIA.

An A-RAP applies where affected persons are not physically displaced, and less than 10% of their productive assets are lost, or fewer than 200 people are displaced. In the case of KOSAP sub-projects, there is no physical displacement of affected persons, and the foreseen impacts on livelihoods such as grazing occasioned by mini-grid construction, wayleaves acquisition, and implementation of community projects are considered minor. A-RAPs will be implemented for sub-project sites on registered and unregistered community land/group ranches.

3.3.6 Energy Access

In Kanakurdio members of the community collect firewood that they use for cooking and heating water. They use torches for lighting and solar to charge their phones at the business centre.

3.3.7 Social and Physical Infrastructure

Transportation and Road network: Kanakurdio area can be accessed by earth road that connects to a tarmac road, 80km to Lodwar town. The main forms of transport are private vehicles and motorbikes.

Sanitation: Open defecation (OP) is widely practiced in the village. There are however few pit latrines.

Mobile Network Coverage: *Safaricom* is the only Network coverage within the village with a signal that is relatively good.

3.3.8 Vulnerable Individuals and Households

According to the World Bank Document-Vulnerability: A View from Different disciplines by Jeffry Alwang and Paul B. Siegel, a vulnerable group is a population that has some specific characteristics that make it at higher risk of falling into poverty than the others. The categories of vulnerable groups identified at the project area include:

- ✓ Poor Female headed households
- ✓ Child headed households
- ✓ The elderly (80 years and above)
- ✓ Persons living with disability (PLWD)

The vulnerable households can hardly access the basic needs and most of them rely on well-wisher within the community. The project should consider such households for electricity connection. Most of them cannot afford the one thousand shillings' connection fees.

3.3.9 Gender based vulnerability

The society in the project area is characterized by a patriarchal family structure. Women continue to be rooted in traditional norms of social behavior which include minimal participation in household or economic decision making, lesser economic freedom and limited opportunity to socialize with other females in the village. During the Focus Group Discussion with women, it was reported that men have more control

over household resources such as land, assets and equipment. In a typical household, the head of the household is the eldest male members, while the decision-making authority is the man. In addition to this, men are responsible for ensuring the financial security of the family. The women on the other hand are responsible for household activities such as fetching water, cooking, cleaning, taking care of the children and also grazing of animals.

3.3.10 Gender Based Violence

Based on the Focus Group Discussion with women at Kanakurdio, there are domestic violence cases and there are no support centres for GBV cases. The forms of GBV that may arise during project implementation include Sexual Harassment (SH) and Sexual Exploitation and Abuse (SEA). A SEA/SH Prevention and Response Action Plan needs to be prepared and implemented in all the phases of the project.

3.3.11 Culture and heritage

There is no cultural site of significance that was reported/observed near the project area. Kanakurdio is made up majorly by the Turkana community which make up 99% of the total population. The community values keeping of cattle, sheep and goats while the other 1% communities are settlers and are involved in businesses while others are civil servants employed to work in various government institutions at the site. The community in the project area are a patriarchal society; men typically speak for women and make decisions in the family. The Borana community members still practice polygamy.

3.3.12 Religion in the project area

The community members at Kanakurdio represent mainly the Christians who go to various churches that include Kanakurdio Catholic church. The days of worship are usually Sundays for the Christians, the contractor is expected to put in to consideration the time of worship.

3.3.13 HIV/AIDS prevalence

According National AIDs Control 2020, HIV prevalence in Turkana is (4.0%) lower than the national prevalence at 5.9% (Kenya HIV Estimates 2020) The county contributed 1% and 1.4 % of the total new HIV infections in Kenya among adults and children respectively. Approximate nuber of infections were not identified at the study area.

3.3.14 Community Organizations/Non-State Actors

Turkana county has 120 registered co-operatives societies (Turkana county CIDP 2018-2022), there is none at Kanakurdio. NGOs, INGOs, FBOs and special interest groups working in the area are Cash transfer, Inua Jamii and Nawiri. These organizations intervene in the social sector mainly in the informal settlements. They contribute considerably towards community empowerment, protection of human rights awareness creation and civic education. Most women groups operate in uninformal

revolving funds (merry go round, table banking). The level of activity of women and youth groups in the county depends on funding from various donors and government funded initiatives.

4 APPLICABLE LEGAL AND REGULATORY FRAMEWORK

4.1 INTRODUCTION

This Chapter outlines the existing national and international environmental and social legislation, policies and institutions applicable to energy generation that guide the development of the Project.

As Kenya is a signatory to various international conventions and laws, national projects need to be aligned with their requirements; relevant international conventions and laws are therefore presented in this chapter.

Finally, a summary of the World Bank (WB) Environmental and Social operational policies. relevant to this Project are presented.

4.2 KENYA ELECTRICITY SUPPLY INDUSTRY (ESI)

The Kenya Electricity Supply Industry (ESI) is one of the sub-sectors in the energy sector which the Ministry of Energy and Petroleum oversees on behalf of the Government of Kenya (GoK). Relevant stakeholders in the ESI are briefly described below.

- **Kenya Power Company:** responsible for distribution and retail supply of electrical energy to end users. Kenya Power purchases power in bulk from the Kenya Electricity Generating Company Limited (KenGen) and the Independent Power Producers (IPPs) through bilateral contracts or Power Purchase Agreements (PPAs) approved by the Energy and Petroleum Regulatory Authority (EPRA).
- **The Energy and Petroleum Regulatory Authority (EPRA):** established by the Energy Act of 2019. The EPRA's mandate extends beyond electricity and includes natural gas (including petroleum), renewables and all other forms of energy. The generation, transmission, distribution, supply, import and export of electricity can only be carried out by parties in possession of a license or a permit issued by the EPRA. In the event that the capacity involved is for own use and less than 1 MW, authorization is not required. Although the generated electricity is expected to be less than 1 MW (0.3 – 1 MW), the fact that the generated electricity is intended for use in the community and there is a possibility for connection to the national grid and sale of excess power to the government, the project requires a license from the EPRC to generate electricity as stipulated in the Energy Act, 2019.

The Energy and Petroleum Regulatory Authority (Authority) together with industry stakeholders have developed the Draft Energy (Mini-Grid) Regulations, 2021 (the 'Regulations'). The Regulations have been developed within provisions 10, 11 and 208 of the Energy Act, 2019 (the 'Act') and shall constitute Regulations to the Act. The Regulations will amongst others, provide guidance to mini-grid developers and other stakeholders on the tariff approval and licensing requirements. This will be directly applicable to the Kanakurdio site.

- **Ministry of Energy and Petroleum:** aims to facilitate provision of clean, sustainable, affordable, reliable, and secure energy services for national development while protecting the environment.

The ministry will be responsible for not only implementing the community projects like water and cooking solutions from the proposed project but also the overall coordination of project implementation and oversight.

The Rural Electrification and Renewable Energy Corporation (REREC): is established under Section 43 of the Energy Act, 2019 as a corporate body. The Corporation is the successor to the Rural Electrification Authority established under section 66 of the Energy Act No. 12 of 2006 (now repealed) and subject to this Act, all rights, duties, obligations, assets and liabilities of the Rural Electrification Authority existing at the commencement of this Act is to be automatically and fully transferred to the Corporation and any reference to the Rural Electrification Authority in any contract or document shall, for all purposes, be deemed to be a reference to the Corporation.

REREC will be responsible for implementing the project, construction of the generation systems and distribution network for the Kanakurdio site. Supply of power will be through KPLC and same tariffs will be charged for each category.

4.3 NATIONAL POLICY AND LEGISLATIVE FRAMEWORK REVIEW

In 2001, the Government established the administrative structures to implement the Environmental Management and Co-ordination Act of 1999 (EMCA). The main administrative structures are described in the following sections:

Table 4-1: Administrative stakeholders and their roles

Stakeholders	Role
NEC	<p>The National Environmental Council is responsible for policy formulation and directions for the purposes of EMCA. The Council also sets national goals and objectives and determines policies and priorities for the protection of the environment.</p> <p><i>The proponent should ensure that the project abides by the set goals and objectives of the Council.</i></p>
NEMA	<p>The responsibility of NEMA is to exercise general supervision and co-ordination over all matters relating to the environment and to be the principal instrument of Government in the implementation of all policies relating to the environment.</p> <p><i>This ESIA has been prepared for submission to NEMA for review and approval prior to the commencement of the Project activities, in compliance to the EMCA.</i></p>
PCC	<p>EMCA has also established a Public Complaints Committee, which provides the administrative mechanism for addressing</p>

	<p>environmental harm. The Committee has the mandate to investigate complaints relating to environmental damage and degradation. The members of the Public Complaints Committee include representatives from the Law Society of Kenya, NGOs, and the business community.</p> <p><i>The proponent should address all issues arising from the project in accordance with the above requirements, including a clear policy of stakeholder engagement and feedback.</i></p>
WRA	<p>Water Resources Authority is responsible for regulation of water resources issues such as water allocation, source protection and conservation, water quality management and pollution control and international waters. One of its functions among others is to receive water permit applications for water abstraction, water use and recharge and determine issue, vary water permits; and enforce the conditions of those permits as well as formulate and enforce standards, procedures and regulations for the management and use of water resources and flood mitigation.</p> <p><i>The project area experiences water scarcity during the drought season. The proponent will have to purchase water for use during construction.</i></p>

The applicable policy and legislative framework is illustrated in **Table 4-2** below.

Table 4-2: National Policy and Legislative Framework

S.No.	Legislation/ Guidelines	Description of the Legislation/Guidelines	Relevance of the legislation/Guidelines
POLICY			
1	Vision 2030	Kenya Vision 2030 is the current national blueprint for development from its inception in 2008 until the milestone year of 2030. This plan is the national long-term development policy that aims to transform Kenya into a newly industrialized, middle-income country by 2030. The Vision is comprised of three key pillars (economic, social, and political), two of which are projected to be positively affected by project implementation.	Under Vision 2030, Energy is identified as one of the key sectors that form the foundation for socio-political and economic growth. Promoting equal opportunities across the entire Kenyan territory and enhancing access to competitively priced, reliable, quality, safe and sustainable energy is essential to the achievement of this vision.
2	The Poverty Reduction Strategy Paper (PRSP) of 2001	The PRSP has the twin objectives of poverty reduction and enhancing economic growth. The paper articulates Kenya's commitment and approach to fighting poverty; with the basic rationale that the war against poverty cannot be won without the participation of the poor themselves.	The proposed project aims at provision and access of renewable electricity geared towards improved economic performance and thus will contribute to poverty alleviation in the project area.
3	National Environmental Action Plan (NEAP) of 1994	The NEAP for Kenya was prepared in mid 1990s. It was a deliberate policy whose main effort is to integrate environmental considerations into the country's economic and social development. The integration process was to be achieved through multi-sectoral	NEMA does not approve a development project unless the impacts of the proposed project are evaluated and mitigation measures proposed for incorporation in the project 's development plan, which is in line with the requirements of the NEAP. The project will be reviewed by NEMA for approval before implementation.

		approach to develop a comprehensive framework to ensure that environmental management and the conservation of natural resources forms an integral part of societal decision-making.	
4	Environmental and Development Policy (Session Paper No.6 1999)	As a follow-up to the foregoing, the goal of this policy is to harmonize environmental and developmental goals to ensure sustainability. The paper provides comprehensive guidelines and strategies for government action regarding environment and development.	<p>The proponent:</p> <ul style="list-style-type: none"> • Is undertaking an Environmental Impact Assessment, Social Impact Assessment and Public participation as part of the planning and approval of infrastructural projects. • Will ensure that periodic Environmental Audits are carried out for the project
5	The Gender and Development Policy (Sessional paper no.2 2019)	The overall goal of this policy is to achieve gender equality by creating a just society where women, men, boys, and girls have equal access to opportunities in the political, economic, cultural, and social spheres of life.	<p>In the absence of appropriate measures, the project can exacerbate gender inequalities and sexual and gender-based violence. In adherence to this policy, measures will be put in place to:</p> <ul style="list-style-type: none"> • ensure gender inclusivity in decision making, employment opportunity and access to the energy generated from the Mini-Grid • mitigate social risks including sexual and gender-based violence, and any form of discriminations
6	The HIV/ AIDS Policy 2009	<p>In summary, the policy aims at:</p> <ol style="list-style-type: none"> i. Establishing and promoting programmes to ensure non-discrimination and non-stigmatization of the infected. ii. Contributing to national efforts to minimize the spread and mitigate against the impact of HIV and AIDS. 	The proposed project is to be implemented in the rural setting at Kanakurdio. The area is not economically empowered hence few HIV/AIDS prevention resources are available. This policy shall provide a framework to both the project proponent and contractor to address issues related to HIV/AIDS during the entire project phase.

		iii. Ensuring adequate allocation of resources to HIV and AIDS interventions;	
National Laws			
1	The Constitution of Kenya, 2010	The Constitution of Kenya promulgated in 2010 is the supreme law of the republic and binds all persons and all State organs at all levels of government. The Constitution provides the broad framework regulating all existence and development aspects of interest to the people of Kenya, and along which all national and sectoral legislative documents are drawn.	The proposed project complies with the Constitution by proposing a structure in its ESIA on how to deal with Social, Health, safety and environmental issues for sustainable development.
2	Environmental Management and Coordination Act, 1999 (And the Amendments Of 2015)	The EMCA is a framework environmental law in Kenya. This Act (assented to on January 14, 2000) provides a structured approach to environmental management in Kenya. With the EMCA coming into effect, the environmental provisions within the sectoral laws were not superseded; instead, the environmental provisions within those laws were reinforced to better manage Kenya's ailing environment.	The proposed project will be undertaken in accordance with relevant sections of the EMCA, specifically Clauses 58 – 63. These sections of the Act are operationalized by subsidiary legislation promulgated under the Act and specifically Legal Notice (L.N.) 101: Environment (Impact Assessment and Audit) Regulations, 2003.
3	L.N. 101: EIA/EA Regulations, 2003 And 2016 Amendments	These regulations provide the framework for undertaking EIAs and EAs in Kenya by NEMA licensed Lead Experts and Firms of Experts. An EIA or EA Study in Kenya is to be undertaken by a firm duly licensed by the NEMA. The EIA/EA Regulations also provide information to	The proposed project is subject to relevant provisions of these regulations and subsequently, the ESIA has been undertaken in accordance with the requirements.

		project proponents on the requirements of either an EIA or EA as required by the EMCA.	
4	L.N. 120: Water Quality Regulations, 2006	This regulation provides for the sustainable management of water used for various purposes in Kenya. The regulation contains discharge limits for various environmental parameters into public sewers and the environment.	The contractor will be required to properly manage the effluent from construction activities in accordance with the above regulations prior to discharge into the environment.
5	L.N. 121: Waste Management Regulations, 2006	Generally, it is a requirement under the regulations that a waste generator segregates waste (hazardous and non-hazardous) by type and then disposes them in an environmentally acceptable manner.	Waste to be disposed in accordance with these regulations.
6	L.N. 61: Noise and Excessive Vibration Control Regulations, 2009	The general prohibition of these regulations states that no person shall make or cause to be made any loud, unreasonable, unnecessary, or unusual noise which annoys, disturbs, injures, or endangers the comfort, repose, health, or safety of others and the environment.	Rules 13 and 14 of the regulations define the permissible noise levels for construction sites. These noise limits will be applicable to the proposed project.
7	Environmental Management and Coordination, (Conservation of Biological Diversity) (BD) Regulations 2006	These regulations are described in Legal Notice No. 160 of the Kenya Gazette Supplement No. 84, December 2006. These regulations apply to conservation of biodiversity which includes conservation of threatened species, inventory and monitoring of BD and protection of environmentally significant areas, access to genetic resources, benefit sharing and offences and penalties.	The proposed project will impact biodiversity through clearance of vegetation on the proposed site. This will be done in strict adherence to ESMMP and revegetation of degraded site will be done as spelt out in the ESMMP

		Additionally, this regulation provides for the local enforcement of the International Convention on Biological Diversity (CBD).	
8	Environmental Management and Coordination, (Fossil Fuel Emission Control) Regulations 2006	These regulations are described in Legal Notice No. 131 of the Kenya Gazette Supplement No. 74, October 2006. These regulations include internal combustion engine emission standards, emission inspections, the power of emission inspectors, fuel catalysts, licensing to treat fuel, cost of clearing pollution and partnership to control fossil fuel emissions. The proposed project will generate fuel emissions linked to the back-up generator. This will only happen when the sun rays are poor.	This legislation gives caution to proponent on proper handling and management of fuels. REREC will adhere to the ESMMP while handling and managing the fuels.
9	Licenses and Permits Required Under The EMCA	The subsidiary legislations under the EMCA are partially monitored using permits and licenses. Subsequently all licenses and permits required during the construction phase shall be the responsibility of the individual contractors and their agents. During the operational phase, all permits, and licenses required to operate the project will be the responsibility of the proponent.	The following permits to be available for inspection during the construction and operational phases of the project: <ul style="list-style-type: none"> ✓ EIA License under Environmental Management and Coordination Act, 1999; ✓ Workplace Registration under Occupational Safety and Health Act, 2007; ✓ Construction Permit by the County Government; and ✓ Noise Permit under Legal Notice 61: The Environment Management and Coordination (Noise and Excessive Vibration Control) Regulations, 2009.
10	Occupational Health and Safety Act, 2007	The Occupational Safety and Health Act (OSHA) was enacted to provide for the health, safety and welfare of persons employed in workplaces,	The contractors will be required to fully comply with Legal Notice 40 titled: Building Operations and Works of Engineering Construction Rules, 1984 (BOWEC).

		and for matters incidental thereto and connected therewith.	Each contractor will develop and implement a formal construction health and safety plan.
11	L.N. 31: The Safety and Health Committee Rules, 2004	These rules came into effect on April 28, 2004, and require that an Occupier formalize a S&H Committee if there is a minimum of 20 persons employed in the workplace. The size of the S&H Committee will depend on the number of workers employed at the place of work	The contractor will be required to constitute Health and Safety Committee to oversee safety and health at the construction site
12	L.N. 24: Medical Examination Rules, 2005	These rules provide for Occupiers to mandatorily undertake pre-employment, periodic, and termination medical evaluations of workers whose occupations are stipulated in the Eighth Schedule to the OSHA and the First Schedule to this Rules. Workers that fall under the above two schedules are required to undergo medical evaluations by a registered medical health practitioner duly registered by the DOSHS.	The contractor should make sure that workers exposed to hazards and or accidents undergo requisite medical examinations as required by these rules
13	L.N. 25: Noise Prevention and Control Rules, 2005	<p>The rules set the permissible level for occupational noise in any workplace (which includes construction sites)</p> <p>The Proponent is to ensure that</p> <ul style="list-style-type: none"> •any equipment brought to the site for use shall be designed or have built-in noise reduction devices that do not exceed 90 dB(A). •those employees that may be exposed to continuous noise levels of 85 dB(A) are medically examined as indicated in Regulation 16. If found unfit, the occupational hearing 	The contractor to ensure that equipment is serviced properly and/or use equipment that complies with the threshold noise values provided in the act. Alternatively, each contractor will be required to develop and implement a written hearing conservation programme during the construction phase.

		loss to the worker will be compensated as an occupational disease.	
14	L.N. 59: Fire Risk Reduction Rules, 2007	<p>Several sections of the rules apply to the proposed project as enumerated below.</p> <ul style="list-style-type: none"> - Regulation 16 requires Proponents to ensure that electrical equipment is installed in accordance with the respective hazardous area classification system. It is also a requirement that all electrical equipment is inspected every six months by a competent person and the Proponent is required to keep records of such inspections. - Regulation 22 provides a description of the functions of a fire-fighting team. - Regulation 23 requires Proponents to mandatorily undertake fire drills at least once a year. - Regulation 34 requires Proponents to develop and implement a comprehensive written Fire Safety Policy - Regulation 35 requires a Proponent to notify the nearest Occupational S&H area office of a fire incident within 24 hours of its occurrence and a written report sent to the Director of DOSHS within 7 days. 	<p>The proponent is expected to comply with the requirements of L.N. 59: Fire Risk Reduction Rules, 2007 by</p> <ol style="list-style-type: none"> Carrying out, and record, a fire risk assessment identifying any possible dangers and risks. Reducing, or where possible remove, the risk of fire and take precautions to deal with the remaining risks. Developing an emergency plan should a fire occur which includes evacuation procedures etc.
15	The Energy Act, 2019	The Energy Act of 2019 deals with all matters relating to all forms of energy including the generation, transmission, distribution, supply and use of electrical energy as well as the legal	<p>The proponent is in line with the Energy act regulations in the following ways.</p> <ul style="list-style-type: none"> • The proponent has identified an available site

		basis for establishing the systems associated with these purposes. The Act also established the Energy and Petroleum Regulatory Authority (EPRA).	<ul style="list-style-type: none"> • Alignment of the Mini-Grid Project to County development plans. • The Mini-Grid proponent has the technical and financial capability to conduct the project • The proponent has conducted the necessary engagement with the community.
16	Water Act, 2016	<p>Part 2 section one of the Act notes that every water resource is vested in and held by the national government in trust for the people of Kenya.</p> <p>Section 143 (1) notes that; A person shall not, without authority conferred under this Act-</p> <p>(a) Willfully obstruct, interfere with, divert or obstruct water from any watercourse or any water resource, or negligently allow any such obstruction, interference, diversion or abstraction; or</p> <p>(b) Throw, convey, cause or permit to be thrown or conveyed, any rubbish, dirt, refuse, effluent, trade waste or other offensive matter or thing into or near to any water resource in such manner as to cause, or be likely to cause, pollution of the water resource.</p>	All construction, operation and decommissioning phases will take caution to refrain from polluting any water resource and will endeavour to prevent pollution in line with the ESMMP.
17	The Energy (Solar Photovoltaic Systems) Regulations, 2012	These regulations shall apply to a solar PV system manufacturer, importer, vendor, technician, contractor, system owner, a solar PV system installation and consumer devices. The Regulations prohibits any person from	The Regulations regulates the design and installation of PV systems. The persons engaged in the designing and installation of the Mini-Grid shall be licensed by EPRA

		designing or installing any solar PV system unless he/she is licensed by EPRA.	
18	The Public Health Act (Cap. 242)	The Act prohibits the proponents from engaging in activities that cause environmental nuisance or those that cause danger, discomfort or annoyance to inhabitants or is hazardous to human and environmental health and safety.	The proponent will be in line with the regulations of this act and will ensure suppression of infectious diseases and maintain proper sanitation during all the phases of the project.
19	The Standards Act Cap 496	The Act is meant to promote the standardization of the specification of commodities, and code of practice; to establish a Kenya Bureau of Standards, to define its functions and provide for its management and control.	REREC will ensure that commodities and codes of practice utilized in the proposed project adhere to the provisions of this Act. All materials and spares used to construct the project will comply with the standardized specifications and certification.
20	Penal Code Act (Cap.63)	Section 191 of the penal code states that if any person or institution that voluntarily corrupts or foils water for public springs or reservoirs, rendering it less fit for its ordinary use is guilty of an offence. Section 192 of the same Act says a person who makes or vitiates the atmosphere in any place to make it noxious to health of persons /institution, dwelling or business premises in the neighbourhood or those passing along public way, commits an offence.	REREC, KPLC and O&M Contractor shall observe the guidelines as set out in the environmental management and monitoring plan laid out in this report as well as the recommendation provided for mitigation/minimization/avoidance of adverse impacts arising from the project activities.
21	The Land Act, 2012	An Act of Parliament to give effect to Article 68 of the Constitution, to revise, consolidate and rationalize land laws; to provide for the sustainable administration and management of land and land-based resources, and for connected purposes	Land in Kanakurdio is community land whose tenure falls under customary land rights. REREC will observe all the relevant provisions of the Act including conversion from community land to public land as will be deemed appropriate

		<p>Forms of Tenure. 5. (1) There shall be the following forms of land tenure- (a) freehold; (b) leasehold; (c) such forms of partial interest as may be defined under this Act and other law, including but not limited to easements; and (d) customary land rights, where consistent with the Constitution.</p> <p>Methods of acquisition of title to land. 7. Title to land may be acquired through— (a) allocation; (b) land adjudication process; (c) compulsory acquisition; (d) prescription; (e) settlement programs; (f) transmissions; (g) transfers; (h) long term leases exceeding twenty-one years created out of private land; or (i) any other manner prescribed in an Act of Parliament.</p> <p>Conversion of land. 9. (1) Any land may be converted from one category to another in accordance with the provisions of this Act or any other written law.</p> <p>(d) Community land may be converted to either private or public land in accordance with the law relating to community land enacted pursuant to Article 63(5) of the Constitution.</p>	
22	Community Land Act, 2016	<p>This Act is critical for the proposed project is within community land. Section 6(1) of the Act provides that 'county governments shall hold in trust all unregistered community land on behalf of the communities for which it is held'.</p>	<p>The proposed project site falls on unregistered community land. The community has since allocated the land in kind for project use. The establishment of the mini-grid will convert communal land to generation and distribution of electric energy for long term. Further,</p>

	<p>Furthermore, Section 6(2) maintains that 'the respective county government shall hold in trust for a community any monies payable as compensation for compulsory acquisition of any unregistered community land'.</p> <p>Section 30(1) states that 'Every member of the community has a right to equal benefit from community land'. Section 26(1) provides that 'a community may set aside part of the registered community land for public purposes and Sub-section (2) holds that 'where land is set aside for public purposes under Sub-section (1), the (Land) Commission shall gazette such parcel of land as public land'. These provisions offer a window for the proposed project to acquire land for project works legally for communities as necessary and to convert the same into public land. This is useful for the project as once done powerful groups will not have opportunity to exclude them on account of their socio - economic statuses. In any event, Section 35 holds that, 'subject to any other law, natural resources found in community land shall be used and managed-</p> <ul style="list-style-type: none"> (a) Sustainably and productively. (b) For the benefit of the whole community including future generations. (c) With transparency and accountability; and 	<p>based on community need assessment the proponent will undertake in kind development project to support the community proposed the cequipping of community borehole and piping of water to community water kiosk.</p>
--	---	---

		<p>(d) On the basis of equitable sharing of accruing benefits.</p> <p>The concept of community land has been defined broadly enough to include VMGs. Women, children, old people, and future generations have been thought of as PAPs and thus their rights secured in this Act</p>	
23	Land Registration Act, 2012	Section 27 (2) provides that a transfer without valuable consideration shall have the same effect as a transfer for valuable consideration when registered.	Once the KOSAP PIU finalizes stakeholder engagements in all the identified counties, the transfer process shall be commenced to ensure that the land rights are secured. This gives the project the required land security to allow project implementation, which is in compliance with this legal requirement.
24	Land value amendment Act 2019	<p>It aims at standardizing the value of land in Kenya for the primary purpose of enhancing efficiency and expediting the compulsory land acquisition process for public projects.</p> <p>It introduces Section 107A into the Land Act, which provides the criteria for the valuation of freehold and community land that is the subject of compulsory acquisition. Community Land, like freehold land, shall be valued based on the criteria outlined in Section 107A and the Land Value Index which will be jointly developed by the national government and county government. Section 5 introduces a list of the forms in which compensation can be made.</p>	Land in Kanakurdio is unregistered community land. The 1.272 ha allocated by the community for the proposed mini-grid will be compulsurily acquired for the project. The MOE will pay compensation in kind through implementation of projects in water, education or health sectors. The community chose equipping of the community borehole and piping of water as their preferred compensation in kind project.
25	The Environment and Land Court Act 2011	This is an Act of Parliament intended to give effect of article 162(2) b of the constitution; to	The project will have a grievance redress mechanism with a committee. The work of the committee will be to

		establish a superior Court to hear and determine disputes relating to the environment and the use and occupation of, and title to, land and to make provision for its Jurisdiction functions and powers, and for connected purposes. The principal objective of this Act is to enable the Court to facilitate the just and expeditious, proportionate and accessible resolution of disputes governed by this Act.	receive and respond to all the grievances raised. As explained in chapter five of this report, an aggrieved party will turn to the legal system after exhausting the GRM levels of resolution set. In the event any disputes on land and environment are not resolved through the project GRM, this court will provide a forum for timely resolution of such grievances.
26	The Physical and Land Use Planning Act, 2019	This Act of Parliament makes provision for the planning, use, regulation, and development of land and for connected purposes.	The proposed site is not in contravention of any Zoning regulations. The project site is within unregistered community land; necessary county approvals will be sought by the proponent e.g., Project design approval and change of use. The approvals shall be issued by the Physical planner in the department of Lands, Housing and Urban Development – Turkana County.
27	The Employment Act No 11 of 2007	This Act is important since it provides for employer – employee relationship that is important for the activities that would promote management of the environment within the energy sector.	With the Contractor and the Project Proponent being primary employers during the construction and operational phases of the Project, respectively, they are bound by this law to abide to its stipulations on employee management and relations
28	The Work Injury Benefit Act, 2007	This is an Act of Parliament to provide for compensation to employees for work related injuries and diseases contracted in the course of their employment	The Proponent and Contractor will maintain an insurance policy cover for its employees, record of accident, carryout proper accident investigations; organize for pre-employment and regular medical examinations for staff.
29	Air Quality Regulations (2014)	Regulation 3 stipulates that the objective of these Regulations is to provide for the prevention, control, and abatement of air	The Proponent and contractor will implement mitigation during construction to ensure neighbouring properties are not impacted by nuisance dust

		pollution to ensure clean and healthy ambient air.	
30	The Traffic Act Chapter 295 Laws of Kenya	<p>This Act consolidates the law relating to traffic on all public roads. Key sections include registration and licensing of vehicles; driving licenses; driving and other offences relating to the use of vehicles on roads; regulation of traffic; accidents; offences by drivers other than motor vehicles and other road users.</p> <p>Many types of equipment and materials shall be transported through the roads to the proposed site. Their registration and licensing will be required to follow the stipulated road regulations.</p> <p>The Act also prohibits encroachment on and damage to roads including land reserved for roads.</p>	The project will observe the provisions of the Act including management of traffic of construction vehicles as guided by the ESMMP
31	National Museums and Heritage Act, 2006	The Act seeks to consolidate the law relating to national museums and heritage; to provide for the establishment, control, management and development of national museums and the identification, protection, conservation and transmission of the cultural and natural heritage of Kenya; to repeal the Antiquities and Monuments Act and the National Museums Act.	During implementation of the project, the Act will be followed in the event of case of chance find of cultural heritage on the proposed site
32	The Prevention, Protection and Assistance to Internally Displaced	This an Act of Parliament that provides for the prevention, protection and provision of assistance to internally displaced persons and affected communities and give effect to the	According to this Act, displacement in projects should be avoided to the extent possible and implementation of KOSAP sub-projects will adhere to this requirement.

	Persons and Affected Communities Act, 2012	Great Lakes Protocol on the Protection and Assistance to Internally Displaced Persons, and the United Nations Guiding Principles on Internal Displacement and for connected purposes.	
33	County Government Act, 2012	<p>This Act makes provisions for county governments' powers, functions and responsibilities to deliver services and for connected purposes. Part VIII of the act on Citizen Participation (87) (b) emphasizes on the right of citizens to participate to any development projects prior to their implementation.</p> <p>This Act gives guideline on planning in the County and especially the partnership in development between the National Government and other investors.</p>	In complying with this requirement, the ESIA team held consultations on the project with the County Government of Turkana namely the Governor, County Executive Committee members for Environment, Energy and Public service and Administration. Additionally, the County government through the CEC Public service administration and the Chiefs office mobilized the communities for the consultation forums
34	The Sexual Offenses Act 2006	This is a comprehensive law that criminalizes a wide range of behaviours including rape, sexual assault, defilement, compelled or induced indecent acts with child imbeciles or adults, gang rape, child pornography, child trafficking, child sex tourism, child prostitution, exploitation of prostitution, incest by male and female persons, sexual harassment, deliberate transmission of HIV or other life threatening sexually transmitted disease, stupefying with sexual intent, forced sexual acts for cultural or religious reasons among others. The Act also	Implementation of a project creates changes in a community in which it is implemented and has potential to can cause shifts in power dynamics between community members and within households. For instance, male jealousy is a key driver of Gender Based Violence (GBV) which can be triggered by labour influx on a project when workers are believed to be interacting with community women. Hence, abusive behaviour can occur not only between project-related staff and those living in and around the project site, but also within the homes of those affected by the project.

		has orders for medical treatment for victims including free HIV prophylaxis, emergency pregnancy pill and counselling. The Act provides stiff penalties in which most of the crimes attract minimum of ten years imprisonment which can be enhanced to life imprisonment.	
35	The Children Act, 2012	<p>Part 2 of the Act denotes the rights of the children and their welfare shall be protected from child labour and armed conflict i.e. Every child shall be protected from economic exploitation and any work that is likely to be hazardous or to interfere with the child's education, or to be harmful to the child's health or physical, mental, spiritual, moral or social development.</p> <p>The Act also notes that a shall be protected from sexual exploitation and use in prostitution, inducement or coercion to engage in any sexual activity, and exposure to obscene materials.</p>	Sensitization to the community on the need to ensure the protection of children has been done and will continue throughout the project cycle. In addition, the contractor will sensitize workers against abuse and exploitation of children.
36	Persons with Disability Act, Chapter 133	This Act provides for the protection of the rights of people with disabilities ensuring they are not marginalized and that they enjoy all the necessities of life without discrimination. The Act guarantees that (1) No person shall deny a person with a disability access to opportunities for suitable employment. (2) A qualified employee with a disability shall be subject to the same terms and conditions of employment	The Act will be adhered to in order to ensure that persons with disability are included in all decision making that affects their lives. This will be monitored to make sure they are not excluded from project benefits and exposed to negative impact from the project that could adversely affect them.

		<p>and the same compensation, privileges, benefits, fringe benefits, incentives or allowances as qualified able-bodied employees.</p> <p>(3) An employee with a disability shall be entitled to exemption from tax on all income accruing from his employment.</p>	
--	--	--	--

4.4 WORLD BANK OP APPLICABILITY

Error! Reference source not found. below shows the applicability of World Bank Operational OPs to the proposed project in Kanakurdio site;

Table 4-3: World Bank Operational Ops

S.No.	Safeguard Policy	Objective	Applicability
1.	Environment Assessment (Operational Policy, OP/BP 4.01)	The objective of this policy is to ensure that Bank-financed projects are environmentally sound and sustainable, and that decision-making is improved through appropriate analysis of actions and of their likely environmental impacts. This policy is considered to be the umbrella policy for the Bank's environmental 'safeguard policies.	The policy is applicable to this project because there are environmental and social concerns associated with the construction and operation of the proposed project. In response, the MoE has commissioned an Environmental impact assessment in order to identify and address the potential impacts to a level that is acceptable.
2.	Natural Habitats (Operational Policy, OP/BP 4.04)	This policy recognizes that the conservation of natural habitats is essential to safeguard their unique biodiversity and to maintain environmental services and products for human society and for long-term sustainable development. The Bank therefore supports the protection, management, and restoration of natural habitats in its project financing, as well as policy dialogue and economic and sector work. The Bank supports, and expects borrowers to apply, a precautionary approach to natural resource management to ensure opportunities for environmentally sustainable development. Natural habitats are land and water areas where most of the original native plant and animal species are still	The proposed project will not significantly affect natural habitats due to its area of coverage. Additionally, caution will be taken to ensure minimum disruptions to habitats as guided by the ESMMP.

		present. Natural habitats comprise many types of terrestrial, freshwater, coastal, and marine ecosystems. They include areas lightly modified by human activities but retaining their ecological functions and most native species.	
3.	Indigenous Peoples (Operational Policy 4.10)	The objective of this policy is to (i) ensure that the development process fosters full respect for the dignity, human rights, and cultural uniqueness of indigenous peoples; (ii) ensure that adverse effects during the development process are avoided, or if not feasible, ensure that these are minimized, mitigated or compensated; and (iii) ensure that indigenous peoples receive culturally appropriate, gender and inter-generationally inclusive social and economic benefits.	The policy is applicable because majority of inhabitants at Kanakurdio being the Turkana and the minority being Somali are both classified as a marginalized groups in Kenya. Further the proponent will continue to engage the PAPs in a culturally appropriate way and allow for decision making in a free, prior and informed consent manner throughout the phases of the project.
4.	Involuntary Resettlement (Operational Policy, OP/BP 4.12)	The objective of this policy is to (i) avoid or minimize involuntary resettlement where feasible, exploring all viable alternative project designs; (ii) assist displaced persons in improving their former living standards, income earning capacity, and production levels, or at least in restoring them; (iii) encourage community participation in planning and implementing resettlement; and (iv) provide assistance to affected people regardless of the legality of land tenure.	The policy is applicable for the entire project because there is land acquisition for the Mini-grid, Wayleaves, contractor facilities and worker's camps.

4.5 ENVIRONMENTAL AND SOCIAL MANAGEMENT FRAMEWORK (ESMF) FOR KOSAP

An Environmental & Social Management Framework (ESMF) for KOSAP was prepared by the Environment & Social Unit, Safety, Health & Environment (SHE) Department of Kenya Power in liaison with REREC and MOE. The purpose of the Environmental and Social Management Framework (ESMF) was to provide a procedure for environmental and social assessment of the proposed REREC, KPLC and MoE subprojects.

The ESMF provides guidelines for MoE, KPLC & REREC in determining the appropriate level of environmental and social assessment required for the sub-projects and in preparing the necessary environmental and social mitigation measures for these sub-projects.

This ESIA report for Kanakurdio Project Site is guided by this KOSAP ESMF.

4.6 RESETTLEMENT POLICY FRAMEWORK (RPF) FOR KOSAP

A resettlement policy framework report was prepared following the Kenyan laws and World Bank policy (O.P 4.12) on involuntary resettlement. The RPF states that K-OSAP component 1 (Mini-grids for Community Facilities, Enterprises, and Households) which involves installation of mini-grids will require land acquisition.

The Framework seeks to avoid, manage, and/or mitigate potential risks arising out of damage to assets, disruption to work, temporary negative impacts on livelihoods and/or in the unlikely case of displacement. The RPF proposes guidelines to develop a Resettlement Action Plan and propose an implementation framework for RAP to mitigate such effects. The RPF states that involuntary resettlement and land acquisition will be avoided where feasible, or minimized or compensated where it cannot be eliminated. Where involuntary resettlement and land acquisition are unavoidable, resettlement and compensation activities will be conceived and executed as sustainable development programs, providing resources to give PAPs the opportunity to share project benefits.

The Ministry of Energy has partnered with the community who are the owners of the land and the County government of Turkana in identifying land for the proposed project. The sub-project site will be acquired compulsorily by NLC, and in-kind compensation in form of priority community projects provided to affected communities. Further, A-RAPs has been prepared for this report. The A-RAP stipulates procedures and actions for acquiring land and compensating affected communities. The A-RAP also documents the land acquisition consultations undertaken with affected communities. This document has been appended in annex 6 of this report.

4.7 VULNERABLE AND MARGINALIZED GROUPS FRAMEWORK (VMGF) FOR KOSAP

As noted above the KOSAP project triggered O.P 4.10 policy on Indigenous People and therefore a Vulnerable and Marginalized Groups Framework (VMGF) was prepared for use by the Ministry of Energy (MOE) and the implementing agencies KPLC and REREC and other stakeholders. The framework was prepared then because was known that IPs are present in all the 14 target project counties. However, at that stage of project preparation, the exact sub-project sites were not yet

identified and the exact impacts of the project on VMGs were not yet completely known. The VMGF describes the policy requirements and planning procedures that during the preparation and implementation of components especially those identified as occurring in areas where VMGs are present.

The purpose of the VMGF is to guide management of issues related to vulnerable and marginalised groups during the development and operation of proposed sub projects and to ensure effective mitigation of potentially adverse impacts while enhancing sharing of benefits.

The VMGF is applicable because the main inhabitants of Kanakurdio are the Turkana community who are classified as VMGs in Kenya. The Somali community is also present and they will also be PAPs of the proposed mini-grid. The Somalis do not qualify for OP 4.10 because their population is low and their livelihood is from businesses. The ESIA did not identify any adverse impact on the communities therefore, a separate Indigenous Peoples Plan will not be required but the proponent will continue to engage the PAPs in a free, prior and informed. The ESIA did not identify any adverse impact on the communities therefore, a Vulnerable and Marginalised Group Plan (VMGP) will not be required however, elements of the VMGP such as inclusion of Somali in the stakeholder engagement process as well as representation on the locational grievance redress committee will be incorporated in the ESMP, to ensure that all the communities access culturally appropriate project benefits and opportunities, in a gender sensitive and intergenerationally inclusive manner.

4.8 SOCIAL ASSESSMENT (SA)

The KOSAP project has triggered the World Bank Operational Policy (OP 4.10) for Indigenous Peoples, and the relevant laws and regulations of the Government of Kenya concerning Vulnerable and Marginalized Groups (VMGs).

The OP 4.10 contributes to the Bank’s mission of poverty reduction and sustainable development by guaranteeing that the development process fully takes due regard to the dignity, human rights and cultures of indigenous people. The Bank requires that the Borrower engages the IPs/VMGs in a process of Free, Prior and Informed Consultations and this is the basis of the public participation in the Counties with the objective obtaining broad community support for the project by the affected IPs/VMGs. In case of any adverse impacts, these should be avoided or reduced where possible and where not feasible, they should be mitigated or compensated.

The Government of Kenya through KPLC and REREC have undertaken a Social Assessment (SA) in order to ensure that the VMGs are not disadvantaged by the project, excluded from benefiting and participating from the project, and to develop alternative plans to enhance project benefits.

4.9 COMPARISON BETWEEN THE WORLD BANK AND KENYAN LAWS TO THIS PROJECT

A comparison between the WB policies and the Kenyan law is presented in this section. The objective is to find out any gaps and propose a recommendation.

Table 4-4: Comparison between the WB Safeguard Policies and the Kenya Legislation

World Bank safeguard Policies	Kenyan laws	Comparison	Recommendation
<p>O.P 4.01 requires screening to determine level of environmental and social assessment to be done.</p> <p>An ESIA is prepared before project implementation.</p>	<p>EMCA requires screening of project to determine level of environmental and social assessment to be done.</p> <p>An ESIA is required once determination is done.</p>	<p>Similar both require screening</p>	<p>Screening has been done and the project is established as medium risk which requires and ESIA.</p>
<p>ESIA is needed once determination had been established and should be prepared identifying all environmental and social impacts and mitigation measures proposed to address the impacts.</p>	<p>ESIA is needed once determination had been established and should be prepared identifying all environmental and social impacts and mitigation measures proposed to address the impacts.</p>	<p>Similar- both require ESIA depending on the project impacts.</p>	<p>ESIA is prepared in line with EMCA /EIA regulations and makes reference to WB safeguard policies.</p>
<p>O.P 4.12 Land Acquisition and Involuntary resettlement should be avoided wherever possible or minimized and exploring all alternatives.</p>	<p>The Government and any other organization, shall prevent internal displacement linked to development projects to the extent possible by exploring other alternatives.</p>	<p>Similar- displacement in projects should be avoided to the extent possible by exploring alternatives.</p>	<p>WB policy is more elaborate than the Kenyan Law.</p>
<p>O.P 4.10 on indigenous people seeks to promote the inclusion of these group in development project and especially through consultation to ensure they also share in the project benefits and ensure negative impacts do not disproportionately fall on them.</p> <p>The policy requires these groups to be consulted separately to enhance their participation.</p>	<p>The COK 20.10 article 56 provides for the right of marginalized communities and the importance of their input in decision making that regards them.</p> <p>National Gender and Equality Act and the Children's Act and Persons with disability Act seeks to promote the inclusion of these persons in all issues as they are often overlooked and left out.</p> <p>Emphasis is also on consulting with them.</p>	<p>Similar- both seek to promote inclusion of these group so that they can share the projects benefits and ensure that negative impacts of the project do not fall on them disproportionately</p> <p>WB needs a social assessment to be conducted.</p>	<p>WB policy more elaborate and the two are being used to compliment.</p>
<p>Project affected persons should be meaningfully</p>	<p>EMCA requires that the project owner seeks the</p>	<p>Both are similar</p>	<p>Consultation has been done and will</p>

consulted and be given opportunities to participate in planning and implementing of projects and especially where there is resettlement.	views of the people who are affected and explain the project information to them and especially the impacts from the project and also obtain their opinions or comments.		be progressed in line with the two WB policy and Kenya legislation.
--	--	--	---

5 STAKEHOLDER ENGAGEMENT

This section profiles the key stakeholders of the Kanakurdio mini-grid site and assesses their potential concerns and levels of influence. The process of stakeholder engagement involved;

- i. stakeholder identification and analysis
- ii. planning for the stakeholder engagement;
- iii. disclosure of information;
- iv. consultation with stakeholders
- v. addressing and responding to grievances; and
- vi. reporting to stakeholders

5.1 LEGAL REQUIREMENT FOR STAKEHOLDER ENGAGEMENT

Timely stakeholder analysis and engagement is key as it provides opportunities for stakeholders to make significant contribution to the project design and implementation which results in enhanced project acceptance among other benefits.

The overall objective and the spirit of the Kenya constitution is to involve citizens in project formulation and implementation at the local level. This is enshrined in our constitution in Article 35 which provides that 'every citizen has the right of access to information held by the state; and information held by another person and required for the exercise or protection of any right or fundamental freedom'.

Further public participation is an essential and legislative requirement for environmental authorization. The ESIA team undertook the stakeholder consultation (SC) for the proposed project in accordance with the requirements for as stipulated in the EMCA, 1999 and its 2015 amendments and ESIA/EA Regulations 2003. The main purpose of public participation is to provide project information to stakeholders and allow them the opportunity to provide input and comment on the project, including issues and alternatives that are to be investigated, thereby facilitating informed decision-making.

Therefore, public participation was a key component of the ESIA of the proposed solar Mini-grid in Kanakurdio. Project information was shared with different stakeholders mainly government officers and also community/project affected persons/PAPs. The positive and negative views of the stakeholders on the project were sought. The exercise was conducted through a public meeting/baraza, key informant interviews. In addition, gender and intergenerational dimensions of the community members were considered and three separate focus group discussions sessions were held with the men, women and the youth.

5.2 OBJECTIVES OF PUBLIC PARTICIPATION

The objective of stakeholder engagement/participation is to identify stakeholders and allow such parties the opportunity to:

- a) To assess the level of stakeholder interest and support for the project;

- b) To enable stakeholder's views to be considered in project design and implementation;
- c) To establish and maintain constructive relationships and means for effective and inclusive engagement with project affected parties on issues that could affect them; and
- d) To ensure appropriate project information on environmental and social risks and impacts is disclosed to stakeholders in a timely and accessible matter.

The purpose of stakeholder engagement/participation is to identify stakeholders and to allow such parties the opportunity to provide input and comment on the project, including issues and alternatives that are to be investigated, thereby facilitating informed decision-making. Stakeholder participation involves both disseminating information about the project as well as gathering primary data from stakeholders regarding the project. Therefore, data collection was a key component of the ESIA of the proposed project. The first source of information was literature review of project documents, site visit coupled with observations and discussion with the project engineers and other project officers. Further information and views on the project were also sought from other government officers at the county and from the target community.

Part of the key project information that was shared with the stakeholders to enable them to understand the project included; positive and negative impacts of the project including potential opportunities. The information specifically focused on; the objective, nature and scale of the project, potential risks and impacts of the project on local communities, mitigation measures to the negative impacts, need for future consultations and means of raising and addressing impacts.

5.3 STAKEHOLDER CONSULTATION AND DISCLOSURE REQUIREMENT FOR THE PROJECT

The World Bank OP 4.01 Environmental Assessment - Stakeholder Engagement and Information Disclosure emphasises on engagement in meaningful consultations with all stakeholders. The stakeholders should be provided with timely, relevant, understandable, and accessible information, and consult with them in a culturally appropriate manner, which is free of manipulation, interference, coercion, discrimination, and intimidation. The ESIA report will be made available in public places that are accessible to project-affected groups and local NGOs (NEMA website and Respective NEMA County offices).

A documented record of stakeholder engagement, including a description of the stakeholders consulted, a summary of the feedback received, and a brief explanation of how the feedback was collected, has been presented below. The consultations were conducted in form of:

- Meeting with the client
- Consultation with the county commissioner and the county officials
- Key stakeholder interviews with the county officials
- Public meeting in Kanakurdio
- Focus Group Discussions

5.4 STAKEHOLDER CHARACTERISATION AND IDENTIFICATION

A stakeholder is "a person, group, or organization that has a direct or indirect stake in a project/organization because it can affect or be affected by the Project/organization's actions,

objectives, and policies” Stakeholders thus vary in terms of degree of interest, influence and control they have over the project.

5.4.1 Stakeholder Mapping

Stakeholder mapping” is a process of examining the relative influence that different individuals and groups have over a project as well as the influence of the project over them. The purpose of a stakeholder mapping is to:

- Identify each stakeholder group;
- Study their profile and the nature of the stakes;
- Understand each group’s specific issues, concerns as well as expectations from the project
- Gauge their influence on the Project;

In line with the nature of the project and its setting in Kanakurdio, the stakeholders have been identified and listed in the table given below;

Table 5-1: Identified Stakeholders

Stakeholder Category	Stakeholder Group	Connection to the KOSAP	Consultation tool
Project Affected Persons	Local Community	<ul style="list-style-type: none"> ➔ Local communities to be affected either directly or indirectly by the project ➔ Vulnerable Individuals and Households ➔ Health institutions ➔ Education institutions 	<p>Public Meeting</p> <ul style="list-style-type: none"> ✓ 1 public meetings was held in Kanakurdio Sub-location under an acacia tree on 20/01/2022. ✓ The meeting was held with attendance of 67 people. <p>Focus Group Discussions (FGD)</p> <ul style="list-style-type: none"> ✓ The FGDs were conducted with the men, women, youth. <p>Key Informant Interviews (KII)</p> <ul style="list-style-type: none"> ✓ The KIIs for Kanakurdio Primary School and Dispensary were conducted through one-on-one interviews.

			The chief was also interviewed on the Community Profile of Kanakurdio.
Interested Parties	<ul style="list-style-type: none"> Government agencies National regulatory bodies 	National Government are of primary importance in terms of establishing policy	Meeting A meeting was held with the Turkana County Commissioners
	County government	<ul style="list-style-type: none"> County government are also of primary importance in county energy requirements and proposed interventions They will play an important role in implementation and sustainability of the project 	

The significance of a stakeholder group is categorized considering the magnitude of impact (type, extent, duration, scale and frequency) or degree of influence (power and proximity) of a stakeholder group and urgency/likelihood of the impact/influence associated with the particular stakeholder group in the project context. The magnitude of stakeholder impact/influence is assessed taking the power/responsibility and proximity of the stakeholder group and the group is consequently categorized as negligible, small, medium or large. The urgency or likelihood of the impact on/influence by the stakeholder is assessed in a scale of low, medium and high. The overall significance of the stakeholder group is assessed as per the matrix provided in Table 5-2 below.

Table 5-2: Stakeholder Significance and Engagement Requirement

		Likelihood of Influence on/ by Stakeholder		
		Low	Medium	High
Magnitude of impact	Negligible	Negligible	Negligible	Negligible
	Small	Negligible	Minor	Moderate
	Medium	Minor	Moderate	Major
	Large	Moderate	Major	Major

5.5 APPROACH AND METHODOLOGY USED IN CARRYING OUT THE PUBLIC PARTICIPATION

ESIA consultants employed various methods in engaging different categories of the stakeholders, these methods included; face to face discussions for the government officers, focused group discussions with men, women, youth and people living with disability (PLWDS) and a public baraza/meeting for the community members.

5.5.1 Stakeholder engagement schedule

The ESIA team identified four categories of stakeholders namely; government officials, opinion leaders at local level and elders and the general community. Stakeholder engagement began early in the planning phases of the project. A letter was written from the Ministry of Energy to Turkana County commissioner informing them about the need to undertake public participation for the proposed project. Stakeholder consultations was undertaken on 20th January 2022. During this time project information in terms of (preliminary design, positive impacts, negative impacts, mitigation measures among others were discussed with various stakeholders. Different categories of stakeholders gave their views on the project.

5.5.2 Mobilization for the community Meeting

County renewable energy officer (CREO) informed the county government and the local community administration on the purpose of the consultation meeting two weeks prior to the date of engagement. The officer called the Chief of the area where the meeting was to take place and requested him to inform the people of the meeting in regards to KOSAP community engagement forums. The chief then informed the people about the meeting through announcement by word of mouth and telephone communication given by the local leaders' key among them were village administrator and village elders in Kanakurdio village.

5.5.3 Methods of consultations

Since there were various groups in the community, different methods were used to disseminate the project information as well as get feedback from the said groups, as discussed beginning section 6.6.

5.5.4 Meeting with Turkana County key stakeholders

A meeting was held with Turkana county commissioner for Turkana County and his officers. The main agenda was to brief them about the presence of the consultants at their administrative areas so as to explain the project to them and solicit their views on it as well as brief them on the need to carrying out consultations with the target communities before project is implemented.

5.5.5 Public forum/meeting

The project team undertook community engagement forums with the target PAPs and the communities where the solar Mini-grids will be set. The main objective was to explain the project

details including need for land identification and solicit broad community support and acceptability of the project. An open meeting with the community members was held. The (KOSAP team) explained to the community members about the project and other related information as discussed in the minutes (attached in **Appendix 3**). The meeting was then opened up for a plenary session – (discussed further in the section).

Community engagement proceedings and resolutions are presented in this section in form of minutes taken/written during the meeting. The meeting was well attended by all people including men, women, youth and persons with special needs.

5.5.6 Focus Group Discussions

After the meeting the community members were told of the need to have focus group discussions to discuss the project further and allow the different groups more opportunities to ask questions or give suggestions regarding the project. Therefore, separate meetings for men, women and youth were held. In these meetings the message on the project was echoed especially on benefits and impacts (both positive and Negative) of the project to the community, rights of the community and the need to have a grievance redress mechanism and committee with representation from all groups in the community.

5.5.7 Stakeholder Analysis

The Stakeholder influence and priority have both been primarily rated as:

- **High Influence:** This implies a high degree of influence of the stakeholder on the project in terms of participation and decision making or high priority to engage with the stakeholder;
- **Medium Influence:** Which implies a moderate level of influence and participation of the stakeholder in the project as well as a priority level to engage the stakeholder which is neither highly critical nor are insignificant in terms of influence; and
- **Low Influence:** This implies a low degree of influence of the stakeholder on the project in terms of participation and decision making or low priority to engage that stakeholder.

The intermediary categories of low to medium or medium to high primarily imply that their influence and importance could vary in that particular range subject to context specific conditions or also based on the responses of the project towards the community.

The coverage of stakeholders as stated above includes any person, group, institution or organization that is likely to be impacted (directly or indirectly) or may have interest/influence over project. Keeping this wide scope of inclusion in stakeholder category and the long life of project, it is difficult to identify all potential stakeholders and gauge their level of influence over project at the outset of the project. Therefore, the project proponent is advised to consider this stakeholder mapping as a live document which should be revised in a timely manner so as to make it comprehensive for any given period of time.

Table 5-3: Summary of Stakeholder Influence

Stakeholder Category	Relevant Stakeholders	Magnitude of Influence	Urgency/Likelihood of Influence	Overall rating of stakeholder rating
Interested parties	National Government agencies	Large	High	Major
	National regulatory bodies	Large	Medium	Major
	County government	Large	Medium	Major
Project affected persons	Local communities to be affected either directly or indirectly by Projects	Large	High	Major
	Vulnerable and Marginalized groups	Medium	High	Major
	Education and Health institutions	Medium	Low	Minor

5.5.8 Information Shared to the Community Members

The MoEP representative assisted by the REREC representative gave a description of the KOSAP project and clarified that its objective was to electrify Kanakurdio because the area is not connected to the national grid. They also informed the community that they would access the electricity at a subsidized cost and that the public facilities such as the schools, hospitals and public boreholes would also be connected at the same cost (one thousand shillings). The Environmental and Social experts from Norken International Ltd and Centric Africa shared with the community the ESIA process and discussed the potential impacts associated with the project and the proposed mitigation measures that would reduce the significance of the adverse impacts. It was also explained that compensation for the land identified by the community for the proposed project will be done in-kind; as a community project chosen from education, health or water sector. The Ministry of Energy through its implementing agency (REREC) would undertake a project for the community up to a cost of the value of the cost of the land taken and informed by the NLC valuation criteria. The community was to choose the project of their own choice in the three sectors.

Table 5-4: Summary of Information shared with community

Project Benefits	Social Impacts	Environmental impacts
<ul style="list-style-type: none"> ➤ Reliable electricity in rural communities ➤ Enhance local ownership of infrastructure ➤ Reduced indoor air pollution ➤ Employment opportunities ➤ Reduction of energy marginalization ➤ Access to water and sanitation service sin 	<ul style="list-style-type: none"> ➤ Labour influx ➤ Child labour ➤ Elite capture ➤ Impacts on cultural heritage ➤ Land acquisition ➤ Gender based violence ➤ Exclusion ➤ Security 	<ul style="list-style-type: none"> ➤ Environmental exposure to Hazardous & toxic materials ➤ Operation of standby generators and heavy machinery ➤ Occupation health and safety risks ➤ Impact on air quality ➤ Visual intrusion impacts ➤ Impacts on local biodiversity

5.5.9 Summary of Community Consultation Meeting Leading to Land Identification and GRC Constitution-(screening level)

Project: Proposed Kanakurdio Solar Mini-grid

Venue of meeting: Kanakurdio Village

Date: 19/03/2021

Ward Administrator, Mr Alfred Namgole called the meeting to order at 10:57 a.m.

Ms Myra Mukulu explained that the proposed project is part the Kenya off Grid Solar Access Project (KOSAP) which is funded by the World Bank and is being implemented by the Ministry of Energy, the Kenya Power and Lighting Company (KPLC) and the Rural Electrification and Renewable Energy Corporation (REREC). MoE will provide overall coordination of the Project including responsibility for safeguards due diligence, and compliance monitoring. REREC will implement the mini grid and will be responsible for the implementation of Resettlement Framework Plan, Environmental Social Management Framework and Social Assessment. She said the Government is committed to providing electricity to communities that have not been served by the national grid such as Kanakurdio because it recognizes energy as key to advancing development. KOSAP is being implemented in 14 counties. In Turkana County 23 minigrid sites, 98 stand-alone solar facilities (public facilities) and 38 boreholes (solarisation) had been identified. One of these minigrid sites is Kanukurdio.

She further noted that the agenda of the visit was to undertake

- Undertake an environmental and social screening of the proposed sites to check suitability in terms of environmental, technical, social and health requirements.

- To sensitize the community on the project land requirements and community rights and entitlements
- Explain the Project Technical Description and connection requirements,
- Discuss potential environmental/social risks and impacts and mitigation and sensitize members on grievance redress mechanism.

Land for the Project

The Surveyor, Ms. Agnes Gachoki told the Baraza that the main purpose of the Baraza was to seek community consent for land donation for the project. Land required for the construction of the Mini grid is 1.272 ha. Land in Kanakurdio, falls under the Community land category. It is yet to be registered, has no title but is jointly owned by the community. Its use and management is governed by the Community Land Act 2016. She further explained that there are several forms of acquiring interest in land including: allocation, land adjudication process, compulsory acquisition, settlement programs, transfers, donation and long-term leases. If the community opted for land donation for the project, the following VLD criteria has to be met;

VLD Criteria

1.	The infrastructure must not be site specific.
2.	The impacts must be minor, that is, involve no more than 10 percent of the area and require no physical relocation.
3.	The land required to meet technical project criteria must be identified by the affected community, not by line agencies or project authorities
4.	The land in question must be free of squatters, encroachers, or other claims or encumbrances.
5	Verification (for example, notarized or witnessed statements) of the voluntary nature of land donations must be obtained from each person donating land.
6.	If any loss of income or physical displacement is envisaged, verification of voluntary acceptance of community-devised mitigatory measures must be obtained from those expected to be adversely affected.
7.	If community services are to be provided under the project, land title must be vested in the community, or appropriate guarantees of public access to services must be given by the private titleholder.
8.	Establishment of Grievance mechanisms

5.5.9.1 Plenary Session

The summary of the comments/remarks from the community in the meeting held at Kanakurdio on 19/03/2021

Name	Questions/Comments	Answer/Remarks
Namujal Lomogol	<p>Nimefurahia sana kwa wageni kusikia ile kitu wanaleta sehemu hii ile yenye sijawahi skia tangu nizaliwe . Sisi tukiwa hapa tunakaribishwa miradi yote tumefurahi.</p> <p>Kuna kitu ilikuwa inakuja kama msaada including telecommunication network.</p> <p>Tukauliza kama kuna kitu itakuwa inakuja kwa account ya community kila mwaka saa hii project itakuwa/namna gani?</p> <p>Plot mingi ni za watu or belongs to individuals, so how are you compensating us</p>	<p>This project is not structured to give annual compensation like Safaricom. This is a GOK/World Bank Project; there are legally defined procedures for different types of compensation including cash, in-kind and land for land.</p> <p>Land in Kanakurdio is community land</p>
Elim Muka	<p>Nafurahia mukutano ya leo. Sisi Kipande hii tuko na mashida mingi kama shida ya maji – some community members travel up to 15 kilometres to get water – initiate water projects.</p> <p>Ni kilomita ngapi yenye hii mradi itafikia (coverage)</p>	<p>Community is free to request compensation in form of a water project. We shall forward your request.</p> <p>3 kilometre radius</p>

Lopeyok Epokor	Mimi nimeshukuru kwa nyinyi kufika pande hii – tumefurahia kupata hii mradi. kuna nyumba mnaeza kututengenezea ili youth ikuwe wanakutania hao kupanga mambo yao?	Project is purely Confined to electricity – but power can be used to promote businesses like haircut, video shows. Community is free to request compensation in whatever form and we will be glad to forward the information to the MoE.
Hassan Lukwewi (Chief)	Mimi niko na bibi wawili, hapa iko panya wa kukata kata wire- Nani atakuwa anatengeneza hii stima	Electrical repairs inside the house is a responsibility of the owner
Mary Lobruk	Hii stima (site) will it be fenced or not to injure children Will women be employed by the project?	Site shall be fenced off Employment is open to everyone
Florence Akiru	Token inalipwa na nini- na siku sijalipa si itazimika tu? Haina tofauti na home systems cause both disconnect when you dont pay	Bought using Mpesa
Paul Ngiretun	Happy ,stima itatusaidia kwa mambo mingi Install pipes from borehole	Community to decide on form of compensation

5.5.10 Project Grievance Redress Committee (GRC)

The community members were informed on the need for creating a locational Grievance Redress Committee (GRC) for purposes of resolving any grievances that may arise in the lifetime of the project as guided by project frameworks. The local GRC will be the first stop shop for resolution of project related disputes and grievances for project affected persons and interested parties. The GRM should be culturally appropriate, inclusive, accessible and developed in consultation with Kanakurdio community. Grievances which cannot be resolved by the local GRC shall be escalated to the sub-county GRC and the National GRC respectively. Any unresolved matter can

then be referred for arbitration or to a court of law. World Bank's GRS is also available to stakeholders to lodge their grievances.

The GRC has to constitute representation from all genders, youth and vulnerable persons. It should be structured in such a way that it provides multiple channels for lodging grievances, ensure anonymity and confidentiality.

5.5.10.1 Focus Group Discussions

The community members were told of the need to have focus group discussions to discuss the project further and allow the people more opportunities to ask questions or give suggestions regarding the project. Therefore, men, women and youth convened to have their meetings separately.

a) Focus Group Discussion with women

Ms. Myra led the women in the women group discussions she explained the importance of such discussions in order to express themselves either by asking questions, giving suggestions or seeking clarifications.

Table: Question, Suggestions, Feedback and Response for the Focus Group Discussion with Women

Name of the person making the contribution (comment or question)	Question, Comment, suggestion	Feedback/Responses by project team	Response by agency on how feedback will be used or acted upon
Florence Akiru Lowuoto	We do not have money to pay for the electricity because we do not have businesses in this area. Nevertheless bring the electricity and we will see how to raise funds	Myra responded that this is noted	REREC can structure friendlier payment terms
Mary Ekwom	Can we get jobs in the minigrid project? This will help us pay for the power	Myra responded that the contractors will recruit community members to work in the minigrid project.	REREC to ensure that contractors have a compulsory quota for local employment
Mary Akiru	The electricity is good since it will improve security in the area	Myra responded that this is noted	

After the discussions in the FGD for women, Myra requested that they elect 2 women to the GRC
The women nominated were:

Name	ID Number	Telephone Number
Lucy Aroto	34038002	0723928407
Margaret Nakaru	4777247	0796686224

b) Focus Group Discussion with the Youth

The youth said they support the project. The youth were then allowed to ask questions. The youths did not raise any questions. They however selected the two as their representatives in GRC

Name	ID number	Telephone number
Florah Nabuin Ejem	25262713	0716760677
Joseph Ekai Nawayakwan	23028558	0790498367

c) Elders/Men Discussions

Mr. Kioko, led the discussion with men, which he informed them that it was a good avenue for them to express their opinions. And freely ask any questions or seek clarifications. The men said they had understood the project and did not have any further questions. They nominated the following to the GRC

Name	ID Number	Telephone Number
Elim muka	0610343	0714958990
Awoi muya	0610591	0728168712
Simon akula	7477266	0718343889

5.5.11 Key Feedback Received During Stakeholder Consultation Process

The general stakeholder consultation was done in a public meeting (Baraza) organized at Kanakurdio Shopping Centre and 67 members were in attendance. The meeting was chaired by the area Chief assisted by the village Administrator and the village elders. The feedback received during the stakeholder consultation process have been summarized below:

- **Project Benefits**
 - Improve the security of the area;
 - Improve their livelihood and enhance their living standards;
 - Provide them with affordable energy for domestic use e.g., Lighting;
 - Create employment opportunities to the locals;
 - Availability and Reliable source of power;
 - Provide job opportunities for the youth;
 - Improve learning-Morning and evening preps by students and pupils.
- **The community raised the following concerns:**
 - If there is a local committee in charge of the project/to handle grievances;
 - Connection fee and method of payment for each household to solar power and Project timelines;
 - If there will be any training on electricity use due to high level of illiteracy in the village;
 - If the contractor will conduct a public participation with regards to employment during construction period;
 - Waste disposal methods during the project life to avoid environmental pollution;
 - Reliability of solar energy in high electricity consumption works e.g., welding and running a posho mill;
 - Distance coverage of electricity connection; and
 - Availability of jobs for the youth during construction
- **The community requested the following from the project:**

- Fencing of the site to minimize risks/public health and safety;
- Employment opportunities especially the non-skilled labor during the construction and operation Phases;
- The contractor to ensure that the workers are not exposed to risks by putting on proper PPEs; and
- The men inquired about the project's timeline because they were concerned that it would take too long to complete. It has already taken long time to commission the construction since the proponent initiated the land acquisition process and the community willingly gave out the land in anticipation the project would commence expeditiously.

Public participation "Baraza" Session



Focused Group Discussion with the Men



Focused Group Discussion with the Women

Plate 5-1: Stakeholder's engagement process

The table below presents the issues /comments raised by the stakeholders during the public meeting and the responses given by the Proponent and the Consultant.

Table 5-6: Summary of concerns raised by stakeholders community

No.	Issues/ Comments	Response from the consultant
1	What kind of compensation or project will the proponents of the project carryout in the community for the land acquired fort the project construction?	The community were asked to choose three priorities they'd like to be compensated by the project proponeNT from Health, education and water; they requested the project proponent to equipp community borehole and pipe of water to community water kiosk as apriority.
2	How far will the minigrid distribution cover?	The mingrid would cover a radius of 1.5kms from the site. Those living out of the minigrid coverage will be provided with alternative solutions of accessing electricity such as low price portable solar systems
3	when will the proponents start implementing the project?	The consultant assured the community the project will be implemented as soon as reporting has been certified and the project licensed

5.6 SUMMARY FEEDBACK RECEIVED DURING FOCUSED GROUP DISCUSSION

The Focus Group Discussions were held with Men, Women and the Youth, below are key concerns and expectations that were raised during the FGDs have been summarized below in Table 5-5;

Table 5-5: Issues and concerns raised during the FGDs

Groups	Issues/comments discussed
Men	<ul style="list-style-type: none"> ✓ The men confirmed that they were fully aware and well conversant with of the project. ✓ Requested for the implementation of the project as soon as possible ✓ Requested that houses for the vulnerable people in the community be connected to electricity free of charge. ✓ Top three community needs according to Men FGD are; equipping the community borehole and improvement of Kanakurdio primary school classrooms.
Women	<ul style="list-style-type: none"> ✓ The women reported they had heard about the project before and feel they knew what it was about. ✓ The project is worthwhile because it would benefit them. They emphasized that the project would lead to business growth in the area and availability of cheap electricity. They stated that the project negative impacts can be mitigated significantly to negligible levels hence the development should process. ✓ The women requested that the contractor to consider the youths for employment during construction period. ✓ Top three community needs according to Women FGD are Water project, Maternity ward improvement in Kanakurdio dispensary and electrification of the area. They requested for a project on water sector Equipping the community borehole and piping of water to community water Kiosk.
Youth	<ul style="list-style-type: none"> ✓ The youth reported that they were well conversant with the project and that the project had been disclosed to them severally in 2021. ✓ All casual jobs be given to the youths in the community. ✓ They added that the project will help create jobs for them and improve the security of the area. ✓ They were concerned that the project is taking too long to implement and wanted to know the distance coverage of the power connection.

5.7 DISCLOSURE OF ESIA TO THE STAKEHOLDERS

The final ESIA report will be shared with the stakeholders by way of making it available to the target PAPs and other interested parties. The ESIA report will be shared through the county

headquarters (a copy will be availed) or will be accessible through the CREO office and REREC website. In addition, a copy of the ESIA should be availed by CREO to the chief's office for access by the local community and other stakeholders.

The findings of the ESIA will be shared or disseminated to the target community in a culturally appropriate format such as using local language and through public meetings and focus group discussions.

5.7.1 Consent

The Community members present accepted the proposed project.

6 IDENTIFICATION OF POTENTIAL IMPACTS AND PROPOSED MITIGATION MEASURES.

6.1 IDENTIFICATION OF IMPACTS

This Section identifies and discusses both negative and positive impacts associated with the proposed construction of solar Mini-grid. The impacts are identified across all the phases namely: Pre-construction Phase, Construction Phase, Operational Phase and Decommissioning Phase.

Identification of project's positive and negative environmental impacts was done through observations, literature review, consultations and use of experts' analysis. The positive impacts are presented first then the negative impacts and their mitigation measures.

6.2 IMPACT ASSESSMENT METHODOLOGY

An impact is essentially any change to a resource or receptor brought about by the presence of the Project component or by the execution of a Project related activity. In general, the assessment of impacts will proceed through an iterative process considering four key elements:

- Prediction of potential impacts and their magnitude (i.e., the consequences of the development on the natural and social environment);
- Evaluation of the importance (or significance) of potential impacts taking the sensitivity of the environmental resources or human receptors into account;
- Development of mitigation measures to avoid, reduce or manage the potential impacts or enhancement measures to increase positive impacts; and
- Assessment of residual significant impacts after the application of mitigation and enhancement measures.

Where significant residual impacts remain, further options for mitigation may be considered and impacts re-assessed until they are as low as reasonably practicable for the Project and would be deemed to be within acceptable levels:

6.3 DEFINING IMPACT

Impacts will be defined in a number of ways, including:

- Nature of impact: positive or negative;
- Type of impact: direct, indirect, or cumulative;
- Duration of impact: temporary, short-term, national, international
- Scale of impact: onsite, local, regional, national, international.

6.4 ASSESSMENT OF SIGNIFICANCE

Criteria for assessing the significance of impacts will stem from the following key elements:

- Status of compliance with relevant Kenyan legislation, policies and plans and any relevant Kenyan or industry policies, standards or guidelines, as well as international best practice standards and guidelines;
- The magnitude (including nature, scale and duration) of the change to the natural or socioeconomic environment (e.g. an increase in coastal erosion, or an increase in employment opportunities), expressed, wherever practicable, in quantitative terms. The

magnitude of all impacts is viewed from the perspective of those affected by considering the likely perceived importance as understood through stakeholder engagement;

- The nature and sensitivity of the impact receptor (physical, biological, or human). Where the receptor is physical, the assessment considers the quality, sensitivity to change and importance of the receptor. For a human receptor, the sensitivity of the household, community or wider societal group is considered along with their ability to adapt to and manage the effects of the impact; and
- The likelihood (probability) that the identified impact will occur. This is estimated based upon experience or evidence that such an outcome has previously occurred.

It is generally accepted that significance is a function of the magnitude of the impact and the likelihood of the impact occurring.

For this assessment, significance has been defined in *Table 6-1* based on five levels described in table below;

Table 6-1: Categories of Significance

Category	Significance
Positive impacts	Positive impacts provide resources or receptors, most often people, with positive benefits. It is noted that concepts of equity need to be considered in assessing the overall positive nature of some impacts such as economic benefits, or opportunities for employment
Negligible impacts (or Insignificant impacts)	Negligible impacts (or Insignificant impacts) are where a resource or receptor (including people) will not be affected in any way by a particular activity or the predicted effect is deemed to be 'negligible' or 'imperceptible' or is indistinguishable from natural background variations.
Minor	An impact of minor significance ('Minor impact') is one where an effect will be experienced, but the impact magnitude is sufficiently small (with or without mitigation) and well within accepted standards, and/or the receptor is of low sensitivity/value.
Moderate	An impact of moderate significance ('Moderate impact') is one within accepted limits and standards. Moderate impacts may cover a broad range, from a threshold below which the impact is minor, up to a level that might be just short of breaching a legal limit. Clearly to design an activity so that its effects only just avoid breaking a law and/or cause a major impact is not best practice. The emphasis for moderate impacts is therefore on demonstrating that the impact has been reduced to a level that is ALARP (as-low-as-reasonably-possible). This does not necessarily mean that 'Moderate' impacts have to be reduced to 'Minor' impacts, but that moderate impacts are being managed effectively and efficiently.
Major	An impact of major significance ('Major impact') is one where an accepted limit or standard may be exceeded, or large magnitude impacts occur to highly valued/sensitive resource/receptors. An aim of EIA is to get to a position where the Project does not have any major residual impacts, certainly not ones that would endure into the long-term or extend over a

	large area. However, for some aspects there may be major residual impacts after all practicable mitigation options have been exhausted (i.e., ALARP has been applied). It is then the function of regulators and stakeholders to weigh such negative factors against the positive ones in coming to a decision on the Project.
--	--

For environmental impacts the significance criteria used in this ESIA is shown in Table 6-2:

Table 6-2: Overall Significance Criteria for Environmental Impacts

Receptor sensitivity	Impact Magnitude		
	Low	Medium	High
Low	Minor	Minor	Moderate
Medium	Minor	Moderate	Major
High	Moderate	Major	Major

For the social impact assessment, the perceptions of stakeholders, expressed as opinions around certain issues, can be as important as actual impacts. Consequently, the concept of perception is explicitly brought into the evaluation of significance after an impact is evaluated. When an impact is of significant stakeholder concern, this may be causing to raise the significance rating. This prompts the formulation of more rigorous and appropriate mitigation measures which focus on the source of the impact and also address stakeholder perceptions. The risk of not addressing stakeholder perceptions is that reputational damage could arise, resulting in the loss of a 'social license to operate'.

6.5 MAGNITUDE OF IMPACT

The impact assessment describes what will happen by predicting the magnitude of impacts and quantifying these to the extent practical. The term 'magnitude' covers all the dimensions of the predicted impact to the natural and social environment including:

- the nature of the change (what resource or receptor is affected and how);
- the spatial extent of the area impacted, or proportion of the population or community affected;
- its temporal extent (i.e., duration, frequency, reversibility); and
- where relevant (accidental or unplanned events), the probability of the impact occurring.

For social impacts, the magnitude considers the perspective of those affected by taking into account the likely perceived importance of the impact, the ability of people to manage and adapt to change and the extent to which a human receptor gains or loses access to, or control over, socio-economic resources resulting in a positive or negative effect on their well-being (a concept combining an individual's health, prosperity, their quality of life, and their satisfaction).

6.6 SENSITIVITY OF RESOURCES AND RECEPTORS

Sensitivities are defined as aspects of the natural or social environment which support and sustain people and the physical environment. Once affected, their disruption could lead to a disturbance of the stability or the integrity of that environment. For ecological impacts, sensitivity can be

assigned as low, medium or high based on the conservation importance of habitats and species. For habitats, these are based on naturalness, extent, rarity, fragility, diversity and importance as a community resource.

For socio-economic impacts, the degree of sensitivity of a receptor is defined as 'a stakeholder's (or groups of stakeholders') resilience or capacity to cope with sudden changes or economic shocks. The sensitivity of a resource is based on its quality and value/importance, for example, by its local, regional, national or international designation, its importance to the local or wider community, or its economic value.

6.7 LIKELIHOOD

Terms used to define likelihood of occurrence of an impact are explained in Table 6-3 below.

Table 6-3: Explanation of Terms Used for Likelihood of Occurrence

An impact with a		
High probability	Refers to a very likely impact	Refers to very frequent impacts
Medium probability	Refers to a likely impact	Refers to occasional impacts
Low probability	Refers to rare impacts	Refers to rare impacts
	As far as one-time events (e.g., air emissions) or slowly developing effects are concerned (e.g., impacts on local life style)	As far as possibly recurring impacts are concerned, such as accident or unplanned events (e.g., traffic accident, fire)

6.8 DEFINITION OF MITIGATION MEASURES

Mitigation measures are developed to avoid, reduce, remedy or compensate for significant potential negative impacts, and to create or enhance potential positive impacts, such as environmental and social benefits. In this context, the term "mitigation measures" includes operational controls as well as management actions. These measures are often established through industry standards and may include:

- Changes to the design of the project during the design process (e.g., changing the development approach);
- Engineering controls and other physical measures applied (e.g., wastewater treatment facilities);
- Operational plans and procedures (e.g., waste management plans); and
- The provision of like-for-like replacement, restoration or compensation.

For potential impacts that are assessed to be of major significance, a change in design is sometimes required to avoid or reduce the significance. For potential impacts assessed to be of moderate significance, specific mitigation measures such as engineering controls are often sufficient to reduce these impacts to ALARP ('as-low-as-reasonably-possible') levels. This approach takes into account the technical and financial feasibility of mitigation measures.

Potential impacts assessed to be of minor significance are usually sufficiently managed through good industry practice, operational plans and procedures.

In developing mitigation measures, the first focus is on measures that will prevent or minimize potential impacts through the design and management of the Project rather than on reinstatement and compensation measures.

6.9 POSITIVE IMPACTS - PRE-CONSTRUCTION

- Employment opportunities arising from recruitment of workers
- Skill acquisition and enhancements to locals and future workforce
- Improvement in quality of life for from the in-kind compensation agreed by the community member

6.10 POSITIVE IMPACTS DURING CONSTRUCTION PHASE

This section enumerates and discusses the positive impacts associated with the proposed project during construction phase of the project.

6.10.1 Creation of Employment Opportunities

Various employment opportunities will be available during construction. The opportunities will be both skilled and unskilled. Majority of the unskilled and semi-skilled jobs will be taken up by the local community. Employment of the locals will increase skill transfer from the contractors.

The approximate number of workers to be employed by the proposed project is not yet known, however, this will contribute to easing unemployment level in the area. There will be a trickle-down effect to the economy at large resulting from new income revenues as well as services provided through this project.

The impact significance is low as it will employ few people over a short period

Enhancement measures

- Contractor should ensure that they prioritise the local community in allocating job opportunities.
- Contractor should ensure that job opportunities are not discriminatory
- Equal opportunities should be given to both men and women

6.10.2 Improving local economy

During this phase, the project will require supply of building materials most of which will be sourced locally at the nearest trading centre and its environs to the extent possible. Therefore, the project will provide ready market for local enterprises with such materials and boosts the local economy.

The businesses that will benefit during this phase are such as hotel, shops, artisan industries and food vending who will be benefit directly from the construction, as people working there will need commodities from them. This will promote the informal sector in securing some temporary revenues and hence improved livelihoods.

One of the responsibilities of the PAPs of the proposed Solar Mini-grid is to undertake wiring of their premises before there are connected and payment of a connection fee of Ksh 1000. The MOE through its implementing agency REREC should consider supporting at least 50 households that are very poor through installation of ready boards to offset the cost of wiring so that they can also access electricity.

The impact significance is low as it will buy few materials over a short period of time

- KPLC should ensure that their contractors/suppliers remit taxes and have a tax compliance certificate
- Prioritise local purchases over imports.
- Remit taxes on behalf of employees
- Contractor should prioritise local purchases over imports;
- Contractor should give preference to the local labourers which increases the local's ability to spend

6.11 POSITIVE IMPACTS DURING OPERATION PHASE

6.11.1 Quality, Reliable Power Supply

There is no electricity in Kanakurdio This is a maiden project with an aim of supplying power through solar because the area is far away from the national power grid. Once operational, household and public institutions (dispensary, primary school) and shopping centre in the area will greatly benefit from the stable power supply.

The impact significance is high as it will provide power where it wasn't for a long period

Enhancement measures

- KPLC should ensure that they have a functional customer support team and a field response team;
- KPLC should ensure that they communicate power outages early to consumers.

6.11.2 Employment Creation

Employment opportunities will also be created during the operation phase of the project. Opportunities that will be created include unskilled, semi-skilled to skilled jobs. These will involve security personnel, and staff to operate and maintain the Mini-grid. Employment will increase skill transfers.

The impact significance is low as it will employ people to manage the substation

Enhancement measures

- KPLC should ensure that they prioritise the local community in allocating job opportunities.
- KPLC should ensure that job opportunities are not discriminatory
- Equal opportunities should be given to both men and women

6.11.3 Reduction of Pollution Associated with Thermal Power Generation, Kerosene and Wood Fuel Usage:

Residents in the area use different sources of energy. Electricity supply will imply that as many as are willing can apply for connection and get connected. This will result in reduced individuals and organizations using diesel generators, less reliance on kerosene, wood fuel and charcoal. This would mean less carbon dioxide is released to the environment and destruction of forests will be reduced hence decreasing greenhouse gases.

The impact significance is high as it will provide cleaner energy over a long [period of time for many households

Enhancement measures

- KPLC should ensure that the power provided cost is competitive to discourage the locals from using unclean source of power.
- KPLC should ensure that they communicate power outages early to consumers

6.11.4 Improvement of Local and National Economy

The mini-grid project will ensure supply of a stable power that will reduce damage to the electronics and this will result in promotion of businesses both in the formal and informal sectors. Availability of power will enable businessmen to scale up their businesses while making it is possible to set up businesses such as salons, barber shops, photocopying machines, cyber cafes, welding, refrigeration of drinks among others. This will result in income improvements at the individual level and for the national economy. More customers will be connected and retail of reliable electricity by the power utility firm will attract increased tax revenues to the government.

The impact significance is low as it will buy few materials over a long period of time

Enhancement measures

- KPLC should ensure that their contractors/suppliers remit taxes and have a tax compliance certificate
- Prioritise local purchases over imports.
- Remit taxes on behalf of employees

6.11.5 Education

Access to electricity at the household level and schools will create opportunities for children be able to study even for longer hours. Additionally, children in households can also access education programs being aired through different radio and T.V. channels. Schools will be able to take advantage of information technology and communication that are becoming a way of life in education sector and learning in general.'

The impact significance is high as it will provide power to schools over a long period for additional study time in the night and morning

Enhancement measures

- KPLC should consider having the transmission lines are closer to schools for them to benefit from the power supply;
- KPLC should consider partnering with the county government in providing street lighting to improve security for children and teachers leaving for school early or leaving late for home

6.11.6 Health Benefits of the Project

Solar energy for lighting is better than kerosene lamps that are in use currently. This is because kerosene lamps emit particles that cause air pollution. The health risks posed by this indoor air pollution mainly include acute lower respiratory infections. Additionally, insufficient illumination (low light) conditions can cause some degree of eye strain and reading in these conditions over long periods of time may have the potential to increase the development of near-sightedness in children and adults. The project will result in many families replacing kerosene lamps for lighting with electricity there-by reducing chances of the afore mentioned disease incidences.

6.11.7 Improved Standard of Living

Availability of power will result in lifestyle changes through improved night lighting, pumping of water instead of manual pumping and refrigeration to maintain food safety and quality.

6.11.8 Security

The area will benefit from improved security since houses, businesses and public institutions will be well lit using electricity. This is as a result of more security flood lights bulbs which helps keep off opportunistic crimes including gender-based violence.

6.11.9 Communications

Access to electricity will lead to improved communication. This will be enabled by the fact that charging of mobile phones will be easier and cheaper. Access to mass media like radio and T.V will provide opportunity for the households to access a wide range of information which is useful for decision making.

6.12 POSITIVE IMPACTS DURING DECOMMISSIONING PHASE

6.12.1 Employment Opportunities

Once the project has served its purpose it will then be decommissioned. This will involve demolition and removal of the facility. During demolition, unskilled, semi-skilled and skilled employment opportunities will be available to the public.

6.12.2 Site Rehabilitation

After demolition of the proposed project, rehabilitation of the project site will be carried out to restore it to its original status or to a better state than it was. This will include replacement of topsoil and re-vegetation which will lead to restoration of the visual, vegetative and aesthetic state of the site.

6.13 NEGATIVE IMPACTS DURING PRE-CONSTRUCTION PHASE

6.13.1 Land Take

The identified site for the proposed Mini-grid is part of a 1.272 Ha of land owned by the community that they set aside for construction of public facilities. The assessment found that;

- No residential houses or businesses premises were on the piece of land
- No socio-economic activity was taking place on the land
- No physical relocation will take place.

Way Leaves

Supply of electricity will involve passing of low voltage (LV) lines to connect the customers to power. It is estimated that a total of 6.79 km of LV circuit will be constructed mainly along the road reserve and along the boundaries to supply power.

The impact significance for this impact is assessed minor considering the community willingly allocated the land for project construction.

Mitigation Measures

- Land for mini-grids will be acquired by NLC compulsorily and affected communities compensated in-kind.
- The contractor will sign and adhere to the agreement for use of community land for contractor facilities and worker's camps, and restoration of the site after use.
- The construction activities will be restricted to within the allocated land and the immediate surroundings only.
- After construction work, any land taken for a temporary basis for storage of material will be restored to their original form.
- Consultations with the community during construction of the low voltage lines

6.14 NEGATIVE IMPACTS DURING CONSTRUCTION PHASE

Despite the positive impacts identified, the project will also have negative impacts. However, adverse impacts are not anticipated due to its size and nature and most of the impacts will be experienced during construction phase of the project. The negative impacts and their mitigation are discussed below.

6.14.1 Vegetation Clearance

The construction process of the proposed Mini-grid and other associated facilities and structures will involve clearing of the existing vegetation cover (mainly grass) and trees. The project site is located in open area with minimal settlement around besides the dispensary and residential homes. Both the magnitude and sensitivity of this impact will be low. The impact will be direct, permanent and minor.

Mitigation Measures

1. Clear only the necessary areas

2. Ensure proper demarcation and delineation of the project area to be affected by construction works.
3. Specify locations for vehicles and equipment, and areas of the site which should be kept free of traffic, equipment, and storage.
4. Designate access routes and parking areas
5. Re-vegetation including planting of trees around the plant/facility

6.14.2 Soil Erosion Impact

During clearing of the area to pave way for groundbreaking soil erosion may take place. This will be due to surface run off or blowing away by the wind if not properly managed. This is bound to happen because the soil will be loose. The area is gently slopy on the lower side and surface run off can also result to soil erosion. The impact significance will be minor due to the nature of the works and the fact that construction activities will be confined in the small project area.

Mitigation Measures

- The contractor shall avoid groundbreaking during the seasons of high rainfall to avoid erosion.
- Monitoring of areas of exposed soil during rainy seasons to ensure that any incidents of erosion are quickly controlled.
- The contractor should ensure that construction related impacts like erosion and cut slope destabilizing should be addressed through landscaping and grassing, carting away and proper disposal of construction materials
- Use silt traps where necessary
- Cover soil stockpiles.
- Landscaping with grass on areas without electrical installation (lower areas)
- The contractor should ensure recovery of exposed soils with grass and other ground cover as soon as possible.
- The contractor should put up proper drainage to avoid unnecessary erosion and do compaction of spoil areas to avoid land instability in form of soil subsidence, slip and mass movement.
- Areas compacted by vehicles during site preparation and construction should be scarified (ripped) by the contractor in order to allow penetration of plant roots and the re growth of the natural vegetation

6.14.3 Contamination of Soil from Fossil Fuels

The potential sources of soil contamination during construction phase are oil /fuel leaks or spills from machinery used in site preparation and trucks used in transporting construction materials. Depending on the size and source of the spill, liquid and gaseous state, petroleum hydrocarbons may remain mobile for long periods of time, threatening to contaminate the soil. The significance of the impact to the soil will be minor due to the nature of the works and the fact that construction activities will be confined in the small project area.

Mitigation Measures

- Construction vehicles must be maintained in good state and proper servicing to ensure no oils are likely to leak
- Care must be exercised not to spill any fossil fuels
- Any contaminated soil shall be scooped and disposed-off appropriately.

6.14.4 Dust Emissions

Initial activities such as site clearing, excavation if done in dry weather conditions will result in dust pollution. Dust emission from construction machinery is regarded as a nuisance when it reduces visibility and is aesthetically displeasing. This is expected during construction works. Dust will be generated from construction earthworks, transportation activities and aggregate mixing. The receptors were noted to be mainly residential and a health facility. The distances from a source that dust impacts can occur is highly site specific and will depend on the extent and nature of incorporated mitigation measures, prevailing wind conditions, rainfall and the presence of natural screening. Due to the variability of the weather, it is impossible to predict what the weather conditions will be when specific construction activities are being undertaken. Therefore, the assessment of construction dust impacts is typically qualitative.

Mitigation Measures

- The construction area should be fenced off to reduce dust to the public
- Sprinkle loose surface earth areas with water to keep dust levels down.
- Construction trucks moving materials to site, delivering sand and cement to the site should be covered to prevent material dust emissions into the surrounding areas;
- Masks should be provided to all personnel in areas prone to dust emissions during construction
- Stockpiles of excavated soil should be enclosed/covered/watered during dry or windy conditions to reduce dust emissions.
- Drivers of construction vehicles must be sensitized so that they limit their speeds so that dust levels are lowered.
- Trees can be planted around the plant provided they do not cast shadows to the solar panels to act as wind breakers and hence decrease dust pollution

6.14.5 Vehicle Exhaust Emissions

Exhaust emissions are likely to be generated by the construction vehicles and equipment. Motor vehicles that will be used to ferry construction materials would cause air quality impact by emitting pollutants through exhaust emissions. There are few Receptors (settlements) within 500 m of the project site and the impact magnitude will be medium and sensitivity medium hence the impact significance will be moderate.

Mitigation Measures

- Drivers of construction vehicles must be sensitized so that they do not leave vehicles idling so that exhaust emissions are lowered.
- Maintain all machinery and equipment in good working order to ensure minimum emissions of carbon monoxide, NO_x, SO_x and suspended particulate matter;

6.14.6 Pollution from Solid Waste Generation

It is expected that solid waste will be generated during construction phase of the project. Solid waste is anticipated to be produced during site preparation, civil works, spoil from excavations and will include; mortar, wood, paper, waste paper wrappings, conductor off cuts, masonry chips and left-over food stuffs. Effects of mismanaged waste include:

- ❖ Public nuisance due to littering or smell in case of rotting
- ❖ Contamination of soils and water courses

- ❖ Creation of breeding grounds for vermin like rodents and cockroaches

The significance of this impact will be minor due to the nature of the works and the fact that construction activities will be confined in the small project area.

Mitigation Measures

- Ensure spoil from excavations is arranged according to the various soil layers. This soil can then be returned during landscaping and then rehabilitation, in the correct order which they were removed that is top soil last;
- Segregate waste and dispose of appropriately using a licensed waste handler
- Provide litter collection facilities such as bins and create awareness campaigns to segregate as early as possible, using the appropriate bins
- Contractor to put in place and comply with a site waste management plan
- The contractor should comply with the requirement of OSHA ACT 2007 and Building rules on storage of construction materials
- Use of durable, long-lasting materials that will not need to be replaced as often, thereby reducing the amount of waste generated over time
- Recovery of materials remains and return to stores
- Re-use of materials where possible
- Proper budgeting to avoid waste generation

6.14.7 Impacts on Water Resources and Water Quality

During construction, excavation activities will involve soil exposure which results in soil erosion due to wind and surface runoff due to rains. Seepage from spilled fuels and oils and leaking machinery can also negatively impact groundwater water which could lead to potential contamination. Generally, due to the localized area of impact, the overall significance of the related impacts on water quality is considered to be minor, provided the necessary mitigation/management measures are implemented.

Mitigation Measures

Measures shall be put in place to minimize erosion and sediment mobility, especially during construction. These measures include:

- ❖ Clear the necessary areas only.
- ❖ Appropriate remedial measures shall be implemented by the contractor in the event of erosion.
- ❖ Infrastructure shall be designed to ensure that contaminated run-off does not reach watercourses.
- ❖ In the event of an oil spill the procedures contained in the emergency response plan of the contractor will come into effect.
- ❖ No vehicle maintenance and service shall be done at project site but in approved garages or service stations to avoid any possible oil and fuel spills that could contaminate soils and possibly ground water quality.
- ❖ Ensure that potential sources of petro-chemical pollution are handled in such a way to reduce chances of spills and leaks.
- ❖ Construction activities to avoid any unchanneled flow of water at the site

- ❖ Storage areas that contain hazardous substances should be bundled with an approved impermeable liner and provision for a pit to be made in case of oil spill.
- ❖ The excavation and use of rubbish pits during construction should be strictly prohibited.
- ❖ A waste disposal area should be designated within the active construction area and this should be equipped with suitable containers i.e., skips or bins of sufficient capacity and designed to contain and prevent refuse from being blown by wind,
- ❖ Areas contaminated by spilled concrete and/or fuels and oils leaking from vehicles and machinery should be cleaned immediately.
- ❖ The contractor to source for alternative source of water for construction purposes to avoid potential conflict with the community

6.14.8 Noise and vibration

During construction activities noise pollution will occur and is bound to be a nuisance and a disturbance to neighboring communities. This noise is from construction equipment, excavation works, concrete mixing and vehicles coming to site but will be temporary. From the prediction of the specialist study on ambient noise quality measurements, the traffic noise that will be emitted by traffic accessing the proposed project site during construction is expected to have an adverse impact on ambient noise. The level of traffic noise will increase depending on the traffic volume. General guideline indicates that an increase of 20% in traffic volume approximates to a noise level increase of around 1 dB, while a doubling of traffic volume results in a noise level increase of about 3 dB. It is however, worth noting that the level of noise is attenuated with increase in distance from the source and thus the sites/objects in close proximity to the source will receive more noise in comparison to those at remote location. The impact significance has therefore been assessed minor. This due to the fact that the impact magnitude is low and the receptor sensitivity is medium.

Mitigation Measures for Noise and Vibration

These proposed mitigation measures aim to ensure that noise generated during construction is kept to minimum and adheres to relevant noise standards. They include:

- Fencing off the construction site with iron sheet during construction
- Install portable barriers to shield compactors thereby reducing noise levels.
- Use of noise-suppression techniques to minimize the impact of construction noise at the project site.
- Use equipment designed with noise control elements.
- Co-ordinate with relevant agencies regarding all construction activities.
- Limit vehicles to minimum idling time and observe a common-sense approach to vehicle use, and encourage drivers to switch off vehicle engines whenever possible.
- Set and observe speed limits and avoid raving of engines
- The Contractor shall ensure that construction activities are limited to working hours (i.e., between 8am and 5pm daily) from Monday to Saturday, or as required in terms of legislation.
- Compliance with Noise and Vibration Regulations of 2009 is expected

6.14.9 Impacts from Hazardous Materials

Some hazardous materials will be used during construction phase of the project. They include insulating oil, paints, solvents and oils. Spilled chemicals can contaminate soil as well as pollute water resources. Additionally, hazardous and flammable substances if improperly stored and handled on site become potential health hazard for construction workers and the public. The amount of hazardous waste generated will be minimal. The significance of the impact will be minor due to a low magnitude and medium sensitivity.

Mitigation Measures

- ❖ Maintenance of construction vehicles will not be done on site
- ❖ All hazardous products and waste should be labeled and handled properly to avoid contact with the ground
- ❖ Material handling to be done by trained and qualified staff
- ❖ The contractor site should have designated area (concrete bunded) for storing hazards materials

6.14.10 Accidental Oil Spills or Leaks

There is possibility of oil leaks from construction vehicles. The construction machines on the proposed site have moving parts which will require continuous oiling to minimize the usual corrosion or wear and tear. These processes may lead to oil spill to the ground. The impact significance will be minor due to the nature of the works and the fact that construction activities will be confined in the small project area.

Mitigation Measures

- In the event of accidental leaks, contaminated top soil should be scooped and disposed of appropriately.
- It is proposed that the refueling and maintenance of vehicles will not take place at the construction site.
- Contractor to create awareness for the employees on site on procedures of dealing with spills and leaks from oil for the construction machinery
- Vehicles and equipment must be serviced regularly and kept in good state to avoid leaks.
- In case of spillage the contractor should isolate the source of oil spill and contain the spillage using sandbags, sawdust, absorbent materials and/or other materials approved by materials.
- Proper training for the handling and use of fuels and hazardous material for construction workers.
- All chemicals should be stored within the bunded areas and clearly labeled detailing the nature and quantity of chemicals within individual containers.

6.14.11 Fire Hazards

During construction of the project, fire hazards are likely to occur especially when precaution measures are not taken to account. Smoking is one of causes of fires and this can happen if cigarette butts are left carelessly. Additionally, keeping of fuels onsite during construction can be

a potential cause of fire. This impact is evaluated to be of moderate significance. All the construction activities will be confined at the project site hence high sensitivity and low magnitude.

Mitigation Measures

The following measures should be put in place to prevent fire hazards:

- ❖ Create awareness to the construction workers on potential fire hazards
- ❖ Provision of firefighting equipment (extinguishers) on site during construction.
- ❖ No smoking shall be done on construction site
- ❖ 'No smoking' signs shall be posted at the construction site
- ❖ A fire evacuation plan must be posted in various points of the construction site including procedures to take when a fire is reported.

6.14.12 Impacts of construction material sourcing (e.g., quarrying)

The construction of the project will utilize materials such as; stone, ballast, sand and hardcore. It is anticipated that they will be obtained from quarry and mining operations. Conscious or unwitting purchase of these materials from unlicensed operations indirectly supports, encourages and promotes environmental degradation at the illegal quarry sites and causes medium to long term negative impacts at source, including landslides. The significance of this impact will be moderate due to high sensitivity and low magnitude.

Mitigation Measures

- ❖ The contractor should source all building materials such as stone, sand, ballast and hard core from NEMA approved sites.
- ❖ Ensure accurate budgeting and estimation of actual construction materials to avoid wastage.
- ❖ Reuse of construction materials where possible.

6.14.13 Increased Water Demand

During the construction of the project there will be increased demand for water by the construction workers and the construction works. Water will be mostly used in the construction works and for wetting surfaces or cleaning completed structures. It will also be used by the construction workers to wash themselves and even drink. Although the sensitivity of the receptor (surface water) in the project area is high owing to unavailability of feasible alternative source of water for the local community, the overall significance of impacts is assessed to be negligible due to negligible magnitude of the impact.

Mitigation Measures

- ❖ Prudent use of available water
- ❖ Consultations with the project local committee on use of water in the community to avoid conflicts with the community
- ❖ Contractor to make own arrangements to provide water for construction works different from the community dam to avoid any conflicts with community.

6.14.14 Energy Consumption

The construction works will consume fossil fuels (mainly diesel) to run transport vehicles and construction machinery. Fossil energy is non-renewable and its excessive use may have serious environmental implications on its availability, price and sustainability. This impact will be negligible owing to the size of the project that will require very few trucks during the construction phase.

Mitigation Measures

Proper planning of transportation of materials will ensure that fossil fuels (diesel, petrol) are not consumed in excessive amounts. Complementary to these measures, the contractor shall monitor energy use during construction and set targets for reduction of energy use.

- ❖ Regular maintenance of vehicles to ensure efficient consumption of fuels.

6.14.15 Occupational Health and Safety Impacts

There are several activities involved during construction. These activities can pose potential health and safety risks to the workers. The activities include excavation, backfilling, civil works, pole erection, stringing of conductors. Risk of accidents and incidents are likely during construction activities. As already noted during construction, the safety and health of employees may be exposed to risk as a result of the use of tools and other machinery to construct the Mini-grid. Occupation safety and health risks includes accidents, fall from heights, pricks by sharp objects etc. The impact on occupational health and safety during the construction phase is evaluated to be of moderate significance. All the construction activities will be confined at the project site hence high sensitivity and low magnitude.

Mitigation Measures

- The contractor should use skilled personnel for activities that demand that.
- Awareness creation/Tool box talks on safety to workers while at construction site and documentation kept
- Workers coming to the site should be knowledgeable on safety precautions to take
- Appropriate PPE (helmet, safety harness, gloves, safety shoes, masks, climbing irons among others)
- Proper housekeeping and maintain good hygiene
- Close supervision of workers
- Engagement of trained first aider on site
- Provide safe drinking water for workers
- Availability of equipped first aid box on site
- Risk assessment by contractor of the construction activities and implement mitigation measures appropriately
- Adherence to occupational Safety and Health Act 2007
- Establish Safety committees
- The contractor must acquire insurance for the workers-WIBA cover

6.14.16 Community Safety -Access to Site by General Public

If access to the Mini-grid site is not controlled then it can lead to people entering the site including animals. This can result to accidents. Impact significance is rated as moderate considering the high impact magnitude and low receptor sensitivity.

Mitigation Measures

- Proper barricading
- Awareness creation to community
- Hazard communication.
- Controlled access to the site by designated personnel
- Maintain records of any person who comes to site

6.14.17 Spread of HIV/AIDS and STIs

HIV and AIDS remain a major challenge in Kenya as well as in Turkana County. The epidemic continues to adversely impact on all spheres of the County; economic, social and health sectors. The project construction will improve the economic status of some of the people employed thus increasing the disposable income with the probability of indulgence in substance abuse and using the money to solicit for sex. Researchers have indicated that HIV prevalence rates are higher in areas where there is high disposable income as might be the case during construction of the project

Mitigation measures include:

- Develop and implement an HIV/AIDS Policy to promote awareness of HIV/AIDS and access to treatment.
- Employees, contractors and subcontractors will be required to follow, and will be trained in, the Worker Code of Conduct which includes context specific guidelines on worker-community interactions, worker-worker interactions and alcohol and drug use.
- Employees, contractors, and subcontractors will be trained and educated to improve awareness of transmission routes and methods of prevention of sexually transmitted infections, communicable diseases and vector borne diseases, notably malaria, prior to working on the Project site. Other diseases will be covered as appropriate.
- Provide access to free condoms at all worker sites and accommodation.
- Work with NGOs or the Ministry of Health to develop and implement a community sensitisation programme on HIV/AIDS and communicable diseases.
- Continue to implement a programme of stakeholder engagement including a grievance mechanism in communities in the Project Area.
- Monitor health trends during Project construction (and operations) in order to be aware of and respond appropriately to any negative health trends that may be linked to the Project and its workers.

6.14.18 Increase in competition for scarce resources and strain on public utilities

The influx of workers in the area is expected to lead to increase in demand for public amenities such as hospitals, transport, schools water resources etc. This could lead to a loss of access to these services by locals especially those who could be among the vulnerable categories. Due an increase in demand, cost of housing near the sites will disadvantage the locals.

The nature of the project will require technical skills that might not be available in the community. This might require movement of construction workers into the community. It is expected that technically skilled personnel might be sourced from outside the community while the unskilled labour is expected to be sourced locally. It is therefore a possibility that the neighbouring communities might go out looking for opportunities in project area thus creating competition. The significance of this impact is considered to be minor because the receptor sensitivity will be medium, and the impact magnitude is low.

Mitigation Measures

- ❖ Reduction of labour influx by tapping into the local workforce to the extent possible
- ❖ Recruitment of local workforce to the extent possible especially unskilled and semi-skilled jobs
- ❖ Consultations with and involvement of local community in project planning and other phases of the project
- ❖ Awareness-raising among local community and workers on the need to have a good /cordial working relation
- ❖ Sensitization/awareness to workers regarding engagement with local community.
- ❖ Contactor shall make provision to provide resources needed by the workers if the need for such resources may result to competition e.g., water
- ❖ Establishment and operationalization of an effective Grievance Redress Mechanism accessible to community members
- ❖ The contractor and the project/community grievance redress committee to work closely address complains raised on time.
- ❖ Gender considerations in employment opportunities
- ❖ Appropriate compensation for work done
- ❖ Respect for community values/culture
- ❖ Prompt payments as per the contractual agreements/terms

6.14.19 Child Labor

Implementation of the project could lead to increased opportunities for the host community to sell goods and services to the incoming workers. This can lead to child labour to produce and deliver these goods and services, which in turn can lead to school truancy. The impact significance is rated minor, based on low sensitivity of the receptor and medium magnitude of the impact.

Mitigation Measures

- Awareness creation to the community that child labour is illegal and that children have a right to education.
- Communication to the contractor that child labour is illegal and adherence to employment act is required.

6.14.20 Gender Based Violence- SEA and SH

Gender-based violence (GBV) is an umbrella term for any harmful act that is perpetrated against a person's will and that is based on socially ascribed (i.e., gender) differences between males and

females. It includes acts that inflict physical, sexual or mental harm or suffering, threats of such acts, coercion, and other deprivations of liberty. GBV in project may manifest in terms of sexual exploitation and abuse (SEA) and workplace sexual harassment (SH).

Sexual Exploitation and Abuse (SEA) is any actual or attempted abuse of a position of vulnerability, differential power, or trust, for sexual purposes, including but not limited to, profiting monetarily and socially from the sexual exploitation of another. Sexual abuse is further defined as “the actual or threatened physical intrusion of a sexual nature, whether by force or under unequal or coercive conditions.” Women, girls, boys and men can experience SEA.

Workplace sexual harassment (SH) includes unwanted sexual advances, request for sexual favors and sexual physical contact.

Sexual exploitation and abuse (SEA) of community members by project workers and sexual harassment (SH) among project workers are forms of GBV that are a potential risk and impacts to this proposed project. GBV has serious and far-reaching negative effects including physical injuries resulting in death or disfigurement, psychological trauma, infection with HIV/AIDS, unwanted pregnancies, social stigmatization and exclusion and economic deprivation among others. Consequently, it is incumbent that preventive measures be mooted to prevent occurrence of such cases.

There are few but rare incidents of gender-based violence in as identified during FGD with Men, women and youths. However, it cannot be ruled out during project implementation. Thus, the significance of this impact is considered to be Minor considering low sensitivity of the receptor and low magnitude of the impact.

Mitigation Measures

To manage GBV risks, the contractor will prepare a SEA/SH Prevention and Response Action Plan that will include a GRM that ensures confidentiality. The plan should have an Accountability and Response Framework. The plan will include the necessary measures for prevention and response. The contractor can make reference to World Bank’s Good Practice Note for Addressing Gender-based Violence in Investment Project Financing involving Major Civil Works (Sept 2020) for further guidance.

It should be noted that the decision to report a GBV case lies with the survivor or the guardians if the survivor (in case of a minor) and such a decision must be respected. Therefore, the contractor or project will only refer the survivor or guardian to the established referral pathway, including the nearest police station with a gender desk for handling GBV cases. Also, should a survivor choose legal redress, the project will similarly facilitate him/her by referring him/her to the nearest established legal support facility that offers legal support to GBV survivors.

Key tasks will include:

- Community engagement to create awareness on SEA/SH risk/ issues
- Creating awareness to workers on the need to refrain from SEA/SH incidences

- Mandatory awareness creation for workers on required lawful conduct in the community and legal consequences for failure to comply with laws
- Mandatory signing and implementation of code of conduct for the workers
- Creation of partnership or liaison with specialized actors in GBV who can respond appropriately in case of any incidence (provide contacts to community)
- Ensure a survivor centered approach in responding to SEA/SH incidences i.e., decision to report lies with the survivor or the guardian in case of a minor.
- Contractor to provide established referral pathway including police station with a gender desk for handling SEA/SH cases and also free toll numbers/hot lines for reporting GBV
- The contractor will also facilitate any survivor who decides to take legal action by referring them to the nearest established legal support facility that offers legal support to GBV survivors.
- Ensure Confidential reporting and responding to SEA/SH cases if reported;
- Encourage reporting of all SEA/SH incidences to the chief or the grievance redress committee members or community elders; and
- Ensure all complaints on SEA/SH or harassment are reported directly through CREO - county renewable energy officer.

6.14.21 Public Health Impacts

Construction works/activities will bring people together and new interactions between people are likely to happen. These interactions are likely to pose risks to the social fabric of the community. Such risks include public health related issues such as (COVID-19 infections and spread, HIV/AIDS, communicable and sexually transmitted diseases (STDs). The receptor sensitivity is medium and low magnitude, hence Minor significance.

Proposed Mitigation Measures

- Sensitize workers and the community on prevention and mitigation of HIV/AIDS and other sexually transmitted diseases, through staff training, awareness campaigns and community *Barazas*.
- Awareness creation and consultations with local communities prior and during construction on the dangers of these diseases
- Informing workers on local cultural values and health matters.
- Provision of condoms to workers
- Allowing migrant workers time to be with their families
- The contractor is impressed upon not to set a construction camp on site.
- The contractor will provide public education/information about HIV/AIDS transmission and prevention measures.
- Ensure equal treatment of workers
- Provide all appropriate COVID-19 preventive measures including campaign to maintain individual measures at the work place.

w) Public Health Impacts Sanitary Waste

Currently at the site there is not sanitary waste system (toilet) except one that is being constructed for the dispensary. There is need to dispose sanitary waste in manner that will not

pose health hazards to the workers and the community. The receptor sensitivity is medium and low magnitude, hence Minor significance.

Mitigation Measures

- Construct/ install pit latrines for both genders clearly labelled

6.14.22 Forced Labour

During construction of the mini-grid the risk of forced labour is likely to occur and precaution is need to safe guard the community from being subjected to forced labour. The impact significance is rated minor, based on low sensitivity of the receptor and medium magnitude of the impact.

Mitigation Measures

- ❖ Contractor must adhere to the employment Act which outlaws any form of forced labour
- ❖ Community to report any form of forced labour at the site
- ❖ Contractor to ensure that all workers have a national ID card or documentation to show they are adults (above 18 years).

6.14.23 Risks related to Inadequate Stakeholder Engagement

Lack of timely and adequate stakeholder engagement during construction is a recipe for dissatisfaction among stakeholders affected and can result to grievances which may turn to conflicts and delays in project construction. With the implementation of the mitigation measures the impact significance is minor.

Mitigation measures;

- ❖ The contractor will design and implement a stakeholder engagement schedule to ensure various stakeholders are engaged at and informed about the project on a timely basis and respond to issues that the stakeholders may require.
- ❖ The contractor will also prepare and implement a grievance redress mechanism to deal with grievances. The grievance redress mechanism committee of this GRM should also include representatives from the community.

6.15 NEGATIVE IMPACTS DURING OPERATION PHASE OF THE PROJECT

NOTE: According to the MOE the proposed project will be constructed by a third party (contractor) who will also operate and maintain the solar mini-grid for a period of seven years and then hand over the plant to REREC who is the implementing agency of the plant on behalf of the MOE. Therefore, mitigation measures against negative impacts during the first seven years will be the responsibility of the contractor after which REREC will take over.

6.15.1 Solid Waste Generation

The proposed Mini-grid is expected to generate some amounts of solid waste during its operation phase. The type of the solid waste generated during the operation of the project will consist of paper, drums, plastic, cables, meters, panels. Such wastes can be injurious to the environment. Some of these waste materials especially the plastic, cables, metals, polythene among others are not biodegradable hence may cause long-term injurious effects to the environment. The overall

impact significance on land due to waste disposal during O&M phase has been assessed as minor due to medium sensitivity and low magnitude.

Mitigation measures

The contractor will be responsible for efficient management of solid waste generated by the project during its operation. In this regard, the contractor;

- ❖ Will provide waste handling facilities such as labelled waste bins for temporarily holding solid waste generated at the site.
- ❖ He shall put in place an emphasis on prudent waste generation and will give priority to reduction at source. This option will demand a solid waste management awareness among the employees.
- ❖ Separation of hazardous waste from non-hazardous waste is required
- ❖ Use long-lasting materials that will not need to be replaced as often, thereby reducing the amount of waste generated.
- ❖ He will ensure that waste is disposed of regularly and appropriately.
- ❖ Waste should then be handled, collected, transported and disposed according to the Environmental Management and coordination (waste management) regulations of 2006.

6.15.2 Liquid Waste/Oils Generation

The solar Mini-grid will have a small diesel backup generator which will operate in the event that the solar energy is limited for example during rainy and cloudy seasons. From its operations there will be waste oil. There is also potential for oil spills and accidents during oil loading to the generator, storage and operations. These oil spills can pollute the soil and even ground water. The liquid waste to be generated is hazardous hence may cause long-term injurious effects to the environment. The overall impact significance on land due to liquid waste disposal has been assessed as minor due to medium sensitivity and low magnitude.

Proposed mitigation measures

- Proper storage of the oil is required to ensure no leakages/ spills to the ground
- Frequent inspection and maintenance of the generator to minimize leakages.
- No vehicles should be serviced or maintained at the Mini-grid area.
- The waste oil or used oil must be disposed-off using NEMA approved waste handlers
- Proper training for the handling and use of fuels for the operators of the Mini-grid.
- In the event of accidental leaks, contaminated top soil should be scooped and disposed of in accordance to the law

6.15.3 Increased oil Consumption

The proposed Mini-grid shall consume fuel/oil in the process of backing up the solar energy required. The fuel is produced mainly through non-renewable resources, implying this will have adverse impacts on these non-renewable resources base and their sustainability. The impact will be of minor significance.

Mitigation Measures

To ensure efficient energy consumption during the operation phase of the project, the contractor to install an energy-efficient lighting system at the project site facilities. This will contribute immensely to energy saving during the operational phase of the project. In addition, the plant operators will be sensitized to ensure energy efficiently in their daily operations.

6.15.4 Increased Storm Water Flow

The panels, building roofs and pavements of the proposed Mini-grid will lead to increased volume and velocity of storm water or run-off flowing across the area covered by the solar panels during operation phase. This will lead to increased amounts of storm water entering the drainage systems. The impact will be of minor significance.

Mitigation Measures

- ❖ Construct the drainage system in a way to follow natural drain of the water
- ❖ Concrete only the required area and leave the rest of the land with vegetation like grass
- ❖ Construct rain harvesting system on the control buildings/office and harness into storage tanks for use

6.15.5 Fire Outbreaks

Carelessness and negligence both at the solar mini-grid and by the PAPs of electricity may cause fires. With the mitigation measures in place the impact is evaluated to be of moderate significance due to high sensitivity and low magnitude.

Mitigation Measures

- ❖ The power plant must contain firefighting equipment (Portable fire extinguishers) of recommended standards and in key strategic points
- ❖ Detection/alarm systems that can detect fire should be considered and installed
- ❖ A fire risk assessment and evacuation plan should be prepared and posted at strategic points and should include procedures to take when a fire is reported.
- ❖ Workers especially operators of the plant must be trained on fire fighting and management
- ❖ 'No smoking' signs shall be posted within the Mini-grid area
- ❖ A fire Assembly point should be identified and marked

6.15.6 Visual Impacts

Once complete the Mini-grid will present visual impacts, both by its physical presence and by visual impacts of its associated structures. Visual intrusion caused by the Mini-grid may cause alteration to the natural scenery of the project area. Some people however, do not notice structures or do not find them objectionable from an aesthetic perspective. To some, the Mini-grid and its utilities may be viewed as part of the infrastructure necessary to enhance everyday lives and activities while to other it represents economic development. The project and its surrounding area are new for such developmental project and will have visual impacts during initial period of Project and the same will disappear over a period of time. Based on the above, significance of visual impact on landscape during operation phase of the project has been assessed as minor due to low receptor sensitivity and impact magnitude being medium.

Mitigation Measures

- ❖ The visual negative impacts can be mitigated through putting up a fence round to keep off/screen the solar panels.
- ❖ Planting of short trees along the fence

6.15.7 Water demand

During this period the demand for water will be lesser than that used in construction. However, some amounts of water will be needed in wiping of the panels and use at the solar plant facility.

Therefore, caution need to be exercised to ensure prudent use of water. The impact is assessed to be negligible due to very low magnitude of the impact.

Mitigation Measures

- ❖ There is need to source for a sustainable water source for use
- ❖ Install water-conserving automatic taps
- ❖ Encourage water harvesting from rooftops and storage for cleaning purposes (washing the panels off dust)
- ❖ Any water leaks through damaged pipes and faulty taps should be fixed promptly.

6.15.8 Sanitary waste

Although there are few people who will be running the Mini-grid during operation phase provision for disposal of sanitary waste must be put in place through septic tanks. The impact is assessed to be negligible due to very low magnitude of the impact.

Mitigation Measures

The area is not served by a sewer system and sanitary waste will be drained through use of septic tanks.

6.15.9 Flooding

Flooding may occur and cause damage to the plant and other associated infrastructure but the risk of occurrence is low since the area is not known for regular flooding. The impact is assessed to be negligible due to very low magnitude of the impact.

Mitigation measures

- ❖ Ensure drainage channels are free of any obstruction at all times i.e., not blocked
- ❖ Construct more channels and or expand existing ones
- ❖ Raise foundations of the solar panels and ensure a proper and firm concrete base
- ❖ Create flooding diversions and or spill ways to divert water from getting into the solar power facility

6.15.10 Workers Occupation Health and Safety

Working within the Mini-grid can poses potential health hazards and accidents to workers. Therefore, caution must be taken to ensure that the Mini-grid does not pose a health and safety risks to workers. Because the maintenance activities will be conducted less frequently, the impact magnitude on occupational Safety and Health will be low. Considering that the accidents may result in injuries and death, the sensitivity is considered to be High. Therefore, the significance is Moderate.

Mitigation Measures

- ❖ Ensure only qualified staff are employed to work in the facility
- ❖ All workers operating the Mini-grid must be equipped with appropriate and adequate person protective equipment (PPE) such as; safety footwear, helmet among others.
- ❖ Operators must be skilled on firefighting management
- ❖ Annual environmental audits should be done
- ❖ WIBA cover for staff is mandatory

6.15.11 Hazardous waste

The amount of hazardous waste generated will be very low and possibly originate from maintenance works and would include; used up batteries, damaged panes, waste oil, and their containers, used rags and spent clean-up rags. This impact is assessed as minor due to medium sensitivity and low magnitude.

Mitigation Measures

- ❖ These waste wastes should not be mixed with other non-hazardous waste
- ❖ Operator to have a designated waste storage area for absolute lead-acid batteries awaiting disposal
- ❖ These wastes should be disposed by NEMA approved handlers

6.15.12 Noise and Vibration

Negligible noise and vibration will be produced during operation phase of the project and would be from the backup generator.

Mitigation Measures

The generator room should be made sound proof to ensure no noise of a nuisance level will be produced. The contractor should also monitor noise levels by taking tests and putting in appropriate measures.

6.15.13 Electric and magnetic fields (EMFs)

Electric magnetic fields are only anticipated during operation period, but these are negligible. The exposure to would be little EMFs is highly negligible because the EMFs produced by the electrical installation are low. Consequently, the study does not anticipate impacts of EMFs.

6.15.14 Shocks and electrocutions to the PAPs

Majority of the PAPs who will be customers and users of the power have not used electricity before. Failure to take appropriate precaution while interacting with electricity can result in electric shocks, fires and even electrocution/death. Impact significance is rated as moderate considering the high impact magnitude and low receptor sensitivity.

Mitigation Measures

The following precaution/preventive measures need to be observed in order to prevent risk of electric shocks, fires and electrocutions.

- Inspect the wiring of the houses before connecting power
- Safety awareness campaigns to the community before connection of power on safety precautions such as
 - Require community to engage a certified technician to do wiring in the premises
 - Use of quality materials while wiring
 - Refraining from individual illegal extensions of power lines to other houses
 - Observing safety measures while using electricity such as not touching sockets and switches with wet hands or wiping with wet cloths
 - Keeping off all electricity infrastructure e.g., not tying livestock on electric poles, no cutting earth wires that run along some electric poles, not interfering with sockets or switches
 - Reporting any electric wire/conductors if found fallen on the ground

- Report any incident regarding electricity at the local office –staff in charge of operating the Mini-grid

6.15.15 Community safety -Access to the facility by general public

Once operational the facility/plant will need controlled access from the public to avoid any safety risks. The contractor will put the following measures to ensure the public will not access the site without permission. Impact significance is rated as moderate considering the high impact magnitude and low receptor sensitivity.

Mitigation Measures

- Fencing off the facility to keep of community members, children and livestock from entering into the facility
- Controlled access to the site only with prior approval
- Maintain records of any person who comes to site

6.15.16 Risks related to poor or inadequate stakeholder engagement (Conflict)

During operation of the project there are grievances that may arise from community and other stakeholders related to poor or inadequate engagement of stakeholders and other need for information or challenges in using power by the community. Therefore, the contractor will design and implement a grievance redress mechanism to deal with grievances. The grievance redress mechanism committee should also include representatives from the community. With the implementation of the mitigation measures the impact significance is minor to negligible.

Mitigation measures

- ❖ Employ from the community to the extent possible
- ❖ Engage the community members and other stakeholders in a timely manner
- ❖ Work closely with the GRM committee members in solving the conflicts
- ❖ Solve all conflicts/grievances at the earliest time possible
- ❖ Ensure all grievances are logged and closed
- ❖ Monitoring the pattern of grievances to come up will long term measures

6.15.17 Gender Based Violence- SEA/ SH

Gender based violence risk is also possible during operation phase although the labor force will be smaller. the impact is assessed as minor due to the low magnitude and medium receptor sensitivity. Therefore, measures must be put in place to address GBV risks.

Mitigation Measures

To manage GBV risks, the contractor will prepare a SEA/SH Prevention and Response Action Plan that will include a GRM that ensures confidentiality. The plan will include the necessary measures for prevention and response.

Key tasks will include

- Community engagement to create awareness on GBV risk/ issues
- Creating awareness to workers on the need to refrain from GBV incidences

- Mandatory awareness creation for workers on required lawful conduct in the community and legal consequences for failure to comply with laws
- Mandatory signing and implementation of code of conduct for the workers
- Creation of partnership or liaison with specialized actors in GBV who can respond appropriately in case of any incidence (provide contacts to community)
- Ensure a survivor centered approach in responding to GBV incidences i.e., decision to report lies with the survivor or the guardian in case of a minor.
- Contractor to provide established referral pathway including police station with a gender desk for handling GBV cases and also free toll numbers/hot lines for reporting GBV
- The contractor will also facilitate any survivor who decides to take legal action by referring them to the nearest established legal support facility that offers legal support to GBV survivors.
- ❖ Ensure Confidential reporting and responding to GBV cases if reported;
- ❖ Encourage reporting of all GBV incidences to the chief or the grievance redress committee members or community elders; and
- ❖ Ensure all complaints on GBV or harassment are reported directly through CREO - county renewable energy officer.

6.15.18 Public Health Impacts –HIV/AIDs

There is potential for HIV/AIDs risks during operation phase. Therefore, the contractor need to put measures to prevent the same. Based on the fact that the receptor sensitivity will be medium and the impact magnitude low, the impact significance will be Minor.

Mitigation Measures

- Sensitize workers and the community on prevention and mitigation of HIV/AIDS and other sexually transmitted diseases, through staff awareness and awareness campaigns for the community
- The contractor will provide public education/information about HIV/AIDS transmission and prevention measures.
- Provision of condoms to workers
- Allowing migrant workers time to be with their families

6.15.19 Public health Impacts -Covid 19 disease

It is likely that the project will be implemented during the Covid 19 pandemic and so preventive measures must be put in place to prevent the disease from spreading. The receptor sensitivity will be medium and the impact magnitude low, therefore, the impact significance will be Minor.

Mitigation Measures

- Social distance must be observed
- Provision of hand wash facilities before access
- Provide thermal guards for temperature check and monitoring for workers and any other person coming to site
- Enforce wearing of masks
- Make provision for testing and treating especially of workers

- Display Ministry of Health guidelines on COVID 19 at strategic points and ensure adherence
- Create awareness on COVID 19 preventive measures
- Provision of contact numbers for the nearest health facility for testing and treatment
- Adhering to any other measures from the ministry of health which may be issued from time to time

6.15.20 Dust emissions

During operation phase not much dust will be generated from the facility but wind and dust storms are potential impacts. This impact will be negligible because there will be no activities on site that will have the potential to generate dust.

Mitigation Measures

- Trees can be planted around the plant/facility provided they do not cast shadows to the solar panels to act as wind breakers and hence decrease dust pollution
- Ensure planting of grass around and within the facility compound

6.15.21 Vehicle exhaust emissions

Exhaust emissions are likely to be generated by the vehicles coming to the facility though on a low risk. Due to the low magnitude of the impact and the low sensitivity, the significance will be minor.

Mitigation Measures

- Drivers of the vehicles must be sensitized so that they do not leave vehicles idling so that exhaust emissions are lowered.
- Company vehicles should be well maintained

6.16 NEGATIVE IMPACTS DURING DECOMMISSIONING PHASE

Preparation for decommissioning

The solar power plant may be decommissioned due to various reasons and there are impacts that will need to be mitigated. Once REREC makes the decision for decommissioning the following will be required;

- ❖ Prepare a Decommissioning Plan and submit to NEMA and the County Governments of Turkana to obtain approval for implementation.
- ❖ Implement the decommissioning plan including backfilling, revegetation, disposal of waste material, recycling of recyclable material among others

Some of the negative impacts associated with the proposed project during its decommissioning phase include;

6.16.1 Noise and Vibration

The demolition works will lead to significant deterioration of the acoustic environment within the project site and the surrounding areas. This will be as a result of the noise from demolition works. The impact significance has been assessed minor due to the fact that the impact magnitude is low and the receptor sensitivity is medium.

Mitigation Measures

Significant impacts on the acoustic environment will be mitigated by the REREC who will put in place several measures that will mitigate noise pollution. The following noise-suppression techniques will be employed to minimize the impact of temporary noise at the project site.

- ❖ Install portable barriers to shield compressors and other small stationary equipment where necessary.
- ❖ Use quiet equipment (i.e., equipment designed with noise control elements).
- ❖ Co-ordinate with relevant agencies in case the noise produced will require a license.
- ❖ Limit pickup trucks and other small equipment to a minimum idling time and observe a common-sense approach to vehicle use and encourage workers to shut off vehicle engines whenever possible.
- ❖ Demolish mainly during the day when most of the neighbours are out working.

6.16.2 Solid Waste Generation

Demolition of the Mini-grid and related infrastructure will result in generation of solid waste. The waste will contain the materials used in construction including concrete, metal, wood, glass, paints, adhesives, sealants and fasteners, conductors, poles solar panels and batteries. Although demolition waste is generally considered as less harmful to the environment since they are composed of inert materials, there is growing evidence that large quantities of such waste may lead to release of certain hazardous chemicals into the environment. The impact will be of major significance due to high magnitude and medium receptor sensitivity. The batteries and panels need to be disposed in a specific way, in accordance to the manufacturer's guidelines and relevant regulations (both National and Turkana County Government regulations).

Mitigation Measures

- ❖ Demolition contractor to adhere to the various manufacturer's guidelines and requirements regarding demolition and disposal
- ❖ Segregation of waste in order to separate hazardous waste from non-hazardous waste and other streams of waste
- ❖ Provision of facilities for proper handling and storage of demolition materials to reduce the amount of waste caused by damage or exposure to the elements
- ❖ Adequate collection and storage of waste on site
- ❖ Safe transportation to the disposal sites / designated area
- ❖ Hazardous waste must be disposed by NEMA approved waste handler

6.16.3 Dust Emissions

Some dust will be generated during demolition works. This will affect demolition staff as well as the neighbours. The impact will be of minor significance.

Mitigation Measures

High levels of dust concentration resulting from demolition or dismantling works will be minimized as follows:

- ❖ Watering all active demolition areas to kill dust.
- ❖ Cover all trucks hauling soil, sand and other loose materials or require all trucks to maintain at least two feet of freeboard.

6.16.4 HIV/AIDs awareness and prevention

Interactions during the decommissioning phase will be for a very limited time. The project will sensitize workers and the surrounding communities on prevention and mitigation of HIV/AIDS and other sexually transmitted diseases, through staff training and awareness campaigns/ to the community. This impact is assessed to be Minor due to the low magnitude and medium receptor sensitivity.

6.17 SOCIAL PROTECTION

There will adequate mechanisms in place to protect local vulnerable population especially women and minors from risks associated with influx of workers (harassment, underage sex). This system will ensure having security on site provided by the contractor as well as sensitization and enforcement by the contractor. There will also be a code of conduct established for contractor employees and contract workers acknowledging a zero-tolerance policy towards child labor and child sexual exploitation. Additionally, the contractor will employ their skilled staff and apply unskilled construction labor from the local population as far as possible to minimize on influx of foreigners into the community.

6.18 SOCIAL INCLUSION

Gender Mainstreaming

Projects usually affect women and men differently, and their roles are highly delineated. The project shall ensure that both men and women are equally consulted about the project and benefit from employment and other opportunities the project will present.

In addition, among communities, some groups are faced with barriers that prevent them from fully participating in political, economic, and social life. Disadvantage is often based on social identity, which may be derived from gender, age, economic status, ethnicity, disability, among other factors. These factors make some groups of people more vulnerable to project impacts than others alongside posing barriers to accessing project benefits. Thus, development projects affect people differently but vulnerable groups are more severely affected than those that are better off. In this project, some groups of the society that can be categorized as the vulnerable. These include the very poor, poor female headed households, poor children headed households, the poor elderly and the special needs persons (disabled). To ensure social inclusion and social sustainability, deliberate effort must be made to ensure the vulnerable take advantage of the project benefits as well as shielding them adverse impacts of the project.

7 ENVIRONMENTAL AND SOCIAL MANAGEMENT AND MONITORING PLAN (ESMMP)

Introduction

Environmental and Social Management and Monitoring Plan (ESMMP) for development projects provides a logical framework within which identified negative environmental and socio-economic impacts can be mitigated and monitored. The ESMMP has been developed to be used as tool to manage the environmental and social impacts that the activities of the proposed project will cause. The contractor before construction will make reference to this ESMMP and develop specific implementation plans. In addition, the ESMMP assigns responsibilities of actions to various actors and provides a timeframe within which mitigation measures and monitoring can be done.

The key objectives of the ESMMP are:

- ❖ To monitor the implementation of mitigation measures against potential adverse impacts of construction and operation phases of the project to ensure that they conform and comply with relevant environmental and social policies, guidelines and legislation
- ❖ To assess for emerging non-anticipated adverse environmental and social impacts and implement relevant mitigation measures to maintain them within acceptable levels
- ❖ To maintain best practice in environmental, social health and safety during project construction and operation

The ESMMP outlined below addresses the identified potential negative impacts and mitigation measures of the proposed Mini-grid during pre-construction, construction, operational and decommissioning phases, based on the chapter of Environmental Impacts and Mitigation Measures of the potential negative impacts.

7.1 MONITORING

Monitoring denotes a systematic process of collecting, analyzing and using information to track the progress of implementation of the ESMMP including coming up with measures to address any emerging issues. Monitoring of the ESMMP will involve recording information to track performance and recommendations to keep implementation of ESMMP on track. Reporting is a key component of the monitoring exercise.

The proposed ESMMP will be subjected to monitoring. Monitoring will have two elements: routine monitoring against standards or performance criteria; and periodic review or evaluation. Monitoring will often focus on the effectiveness and impact of the ESMMP as a whole.

During construction phase, the Implementing agency (REREC) shall monitor the contractor's activities in order to verify that the management measures/procedures/specifications are implemented as contained in the ESMMP. Compliance will mean that the contractor is fulfilling their contractual obligation.

During operation phase, REREC will monitor facility's operations to ensure compliance with management measures in the ESMMP and operation procedures. As part of this monitoring, the

REREC will undertake or statutory initial environmental audit as required by the ESIA/EA Regulations, 2003 and subsequent annual environmental audits.

7.2 PLAN MONITORING

All of the management plans make provision for monitoring and evaluation. Special attention should be given to the monitoring arrangements relating to biophysical impacts, occupational health and safety, social risks, facility operational and emergency response.

During the construction phase of the project, the contractor's Environmental Health and Safety Officer (EHSO) shall report on the implementation of the ESMMP i.e., all environmental, safety and health impacts as well as accidents and incidents to the implementing agency. The social specialist of the contractor will report on implementation of the social measures as spelt out in the ESMMP.

The reported impacts and incidents will be captured on a database to ascertain trends and track progress in the implementation of preventive and corrective actions, and benchmarking against other, similar operations.

During operation, the implementing agency – REREC will monitor the health and safety of personnel and contractors, in compliance with legislative requirements. Emergency incidents should be reported to the relevant authorities. The reported impacts and incidents will be captured on a database to identify weakness in the emergency response plan and track progress in the implementation of preventative and corrective and benchmarking against other similar operations.

The Environmental and Social Management and Monitoring Plan (*ESMMP*) will provide the basis for monitoring of potential Environmental, social and health Impacts associated with the project. The ESMMP provides effective observation and documentation of monitorable parameters that will help in analyzing the effectiveness of the proposed mitigation measures with the advantages of improving operational efficiency, promoting competitive advantage, improving risk management, reducing liabilities and improving business performance. The ESMMP has been provide below.

7.3 ENVIRONMENTAL AND SOCIAL MONITORING BY CONTRACTORS

REREC will require that contractors monitor, keep records and report on the following environmental, health and social issues of the proposed project.

1. *Safety*: hours worked, recordable incidents and corresponding root cause analysis (lost time incidents, medical treatment cases), first aid cases, high potential near misses, and remedial and preventive activities required (for example, revised job safety analysis, new or different equipment, skills training, and so forth).
2. *Environmental incidents and near misses*: environmental incidents and high potential near misses and how they have been addressed, what is outstanding, and lessons learned.

3. *Major works*: those undertaken and completed, progress against project schedule, and key work fronts (work areas).
4. *E&S requirements*: noncompliance incidents with permits and national law (legal noncompliance), project commitments, or other E&S requirements.
5. *E&S inspections and audits*: to include date, inspector or auditor name, and records reviewed, major findings, and actions recommended and implemented.
6. *Workers*: number of workers, indication of origin (expatriate, local, nonlocal nationals), gender, age and skill level (unskilled, skilled, supervisory, professional, management).
7. *Training on E&S issues*: including dates, number of trainees, and topics.
8. *Footprint management*: details of any work outside boundaries or major off-site impacts caused by ongoing construction—to include date, location, impacts, and actions taken.
9. *External stakeholder engagement*: highlights, including number of formal and informal meetings, and information disclosure and dissemination—to include a breakdown of women and men consulted and themes coming from various stakeholder groups, including vulnerable groups (e.g., disabled, elderly, children, etc.).
10. *Details of any security risks*: details of risks the contractor may be exposed to while performing its work—the threats may come from third parties external to the project.
11. *Worker grievances*: details including occurrence date, grievance, and date submitted; actions taken and dates; resolution (if any) and date; and follow-up yet to be taken—grievances listed should include those received since the preceding report and those that were unresolved at the time of that report.
12. *External stakeholder e.g., community grievances*: grievance and date submitted, action(s) taken and date(s), resolution (if any) and date, and follow-up yet to be taken—grievances listed should include those received since the preceding report and those that were unresolved at the time of that report. Grievance data should be age and gender-disaggregated.
13. Major changes to contractor's environmental and social practices.
14. *Deficiency and performance management*: actions taken in response to previous notices of deficiency or observations regarding E&S performance and/or plans for actions to be taken—these should continue to be reported until REREC determines the issue is resolved satisfactorily.

Table 7-1: Environmental and Social Management and Monitoring Plan
Social Impacts

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Local employment	<ul style="list-style-type: none"> -Prioritize hire of locals for all unskilled labour. -Implement a local recruitment plan that is fair and transparent (including recruitment processes that ensure inclusivity of both men and women, vulnerable individuals, minority clans, ethnic groups and VMGs. -Adhere to labour laws, and labour management practices (timely remuneration, equitable compensation for both genders for equal work etc.) -Create awareness to workers and the community on worker and project grievance redress mechanisms. 	<ul style="list-style-type: none"> Construction Operations Decommissioning 	<ul style="list-style-type: none"> Contractor Proponent O&M Contractor and KPLC 	<ul style="list-style-type: none"> -Fair and transparent local recruitment plan in place. -Recruitment processes (job adverts, interviews, selection etc.). -Number of locals employed based on gender, vulnerability, ethnic group, clan etc. -Type of employment (skilled, semi-skilled and unskilled). -Grievances raised, those aggrieved, status of resolution. 	Quarterly	Contractor's cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Local Sourcing	-Source materials from local businesses/communities, and where necessary give opportunities to businesses owned or operated by vulnerable individuals.	Construction Decommissioning		-Number and types of businesses sourced from, businesses owned and operated by vulnerable individuals, types and quantities of materials etc.	Quarterly	No additional cost
Land acquisition and compensation for land and assets on land	In line with the RPF provisions; -Prepare and implement an Abbreviated Resettlement Action Plan (A-RAP) to guide land acquisition for the mini-grid, and wayleaves for power distribution. Further, the proponent will fast-track A-RAP preparation to ensure that land acquisition and contractor mobilization to the site is undertaken after the A-RAP is finalized, cleared, and disclosed.	Pre-Construction	Contractor- <i>(contractors' facilities, workers camps)</i> Proponent- <i>(project land for generation assets)</i>	-Land Acquisition and consultation report (consultation (minutes and lists of participants). -Type and amount of compensation paid to affected persons. - Priority community project implemented and handed over to affected communities.	Quarterly	Value of compensation in kind project will be equivalent to the value of land acquired as per NLC

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<ul style="list-style-type: none"> -The contractor will implement and adhere to agreements for temporal use of land and restoration of land after use. -Compensate affected communities in-kind (priority project) for the loss of land. -The construction activities will be restricted to within the allocated land and the immediate surroundings only. -After construction work, any land taken for a temporary basis for storage of material will be restored to their original form. -Consultations with the community on the low voltage lines. -The design of the distribution line will utilize the existing road reserves. However, any damage to structures, crops, trees, community facilities and 			<ul style="list-style-type: none"> -Signed agreements with communities on the use and restoration of their land. 		

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	other assets will be compensated in line with the RPF provisions.					
Labor Influx and related impacts (SEA/SH, HIV/AIDs and other STIs)	<ul style="list-style-type: none"> -Tap into the local workforce to the extent possible to reduce labor influx. -Recruit local workforce to the extent possible especially for unskilled and semi-skilled jobs. -Consult with and involve local community in project planning and other phases of the project. -Raise awareness among local community and workers on the need to have a good /cordial working relation -Sensitize workers regarding engagement with local community. -Make provision to provide resources needed by the workers if the need for such resources may result to competition e.g., water. 	Construction Decommissioning	Proponent, Contractor	<ul style="list-style-type: none"> -Records of employees/updated employee register. -Number of local community employees and external employees/ updated employee register. 	Quarterly	50,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<ul style="list-style-type: none"> -Establish and operationalize an effective Grievance Redress Mechanism accessible to community members. -The contractor and the project/community grievance redress committee to work closely address complains raised on time. -Include gender considerations in employment opportunities. -Provide appropriate compensation for work done. -Respect for community values/culture. -Prompt payment of workers as per the contractual agreements/terms. 					
Child labor	<ul style="list-style-type: none"> -Employ workers who are 18 years and above, and with a valid national ID at the time of hire. -Implement and monitor the employment register regularly. Compliance with 	Construction Decomissioning	Contractor, Proponent	-Updated employment register indicating locals employed, their ages, national	Quarterly	20,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>the national labor laws and labour management practices.</p> <p>-Put visible signage on site "No Jobs for children"</p> <p>-Do not allow children at the project site.</p>			<p>identification numbers etc.</p> <p>-Grievances raised, aggrieved persons and status on resolution etc.</p>		
GBV- SEA and SH	<p>-Prepare an SEA/SH Prevention and Response Action Plan, to manage the SEA/SH risks.</p> <p>-The Action Plan to be proportionate to potential SEA/SH risks, and to include measures such as awareness creation for communities and workers; identification of referral services for survivors and a GRM that ensures confidential reporting of GBV cases.</p> <p>-Implement a code of conduct signed by all those with physical presence on site.</p>	Construction Operations Decommissioning	Contractor O&M Contractor and KPLC	<p>-Minutes of awareness creation sessions for the community and workers on GBV-SEA/SH.</p> <p>-Code of conduct signed by all those with physical presence on site.</p> <p>-GRM that ensures confidentiality of GBV cases in place.</p> <p>Documented referral services for survivors.</p> <p>-Grievances raised, aggrieved persons and</p>	Quarterly	50,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
				status on resolution etc		
Forced Labor	<ul style="list-style-type: none"> -Adhere to the Employment Act which outlaws any form of forced labor. -Report any form of forced labor at the site. -Ensure that all workers have a national ID card or documentation to show they are adults (above 18 years). 	Construction Decommissioning	Contractor Proponent	-Number of reported cases of forced labor.	Quarterly	20,000.00
Risks related to Inadequate stakeholder engagement	<ul style="list-style-type: none"> -Prepare a stakeholder engagement/consultation plan (SEP) that is proportionate to the subproject and the identified stakeholders. -Timely and prior disclosure of project all project information, including project instruments, the full rights and entitlements of project affected persons, sub-project positive and negative impacts and opportunities, proposed subproject budget. 	Construction Operations Decommissioning	Contractor O&M Contractor and KPLC	<ul style="list-style-type: none"> -Availability of and implementation of the Stakeholder Engagement Plan. -# of stakeholder consultations held -Record of stakeholder consultations held (minutes of meetings and list of participants). -Information disclosed, to whom it was disclosed 	Quarterly	30,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>-In line with the SEP, undertake adequate consultations prior to construction and throughout the project cycle with all segments of the community and other relevant stakeholders.</p> <p>-Prepare and implement a grievance redress mechanism to deal with grievances.</p> <p>-The grievance redress committee to include representatives from the community.</p> <p>-Sensitize stakeholders on SEP and GRM.</p>			<p>(men women, PWD, youth, vulnerable individuals and households etc., methods and languages used in the disclosure (culturally appropriate and accessible), grievances raised and status on resolution etc.</p> <p>-Concerns raised and actions raised.</p>		
Exclusion of VMGs and vulnerable individuals and households	<p>In line with the provisions of the ESMF, VMGF and Social Assessment ensure the following.</p> <ul style="list-style-type: none"> • Early identification and inclusion of VMGs and disadvantaged groups. 	Pre-construction Construction Operations Decommissioning	Contractor O&M Contractor and KPLC	Minutes of consultative meetings with all community segments including VMGs and vulnerable individuals and households,	Quarterly	No additional cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<ul style="list-style-type: none"> • Meaningful consultation to effectively participate in the project. • Timely and prior disclosure of relevant project information to VMGs and disadvantaged groups. • Adequate and ongoing consultations with VMGs and disadvantaged groups in line with the SEP. • All concerns or grievances raised are fully resolved in a timely manner. • Access to culturally appropriate project benefits and opportunities. 			grievances raised and status on resolution etc.		

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Inaccessibility of project benefits to VMGs and other vulnerable individuals due to affordability challenges	-Consult VMGs and Vulnerable individuals and households on charges for sub project services, and put in place specific interventions to ensure the vulnerable equally access project benefits.	Operations	O&M Contractor and KPLC	-Interventions to enable those vulnerable access project benefits. -Number of complaints raised by VMGs/vulnerable individuals regarding access to project services. -GRM that is culturally appropriate and accessible. Grievances raised and status on resolution etc	Quarterly	No additional cost
Inadequate grievances management	-Constitute a Local Grievances Committee in consultation with all community segments, and incorporates the existing local dispute resolution mechanism.	Construction Operations Decommissioning	O&M Contractor and KPLC	-Local Grievances Committee in place, composition of committee, awareness of community and workers on	Quarterly	No additional cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<ul style="list-style-type: none"> -Implement a workers grievances mechanism. -Awareness on the culturally appropriate and accessible GRM to all community segments including VMGs, vulnerable individuals and households and CSOs -All reported grievances are logged, dated, processed, resolved and closed out in a timely manner. -Proportionate representation of VMGs and vulnerable individuals in the local grievances committee. -GRM provides for confidential reporting of particularly sensitive social aspects such as GBV, as well as anonymity. 			<ul style="list-style-type: none"> project and worker GRMs, updated GRM logs, types of grievances -Availability of grievance redress process -Number of grievances reported -Number of grievances resolved in a timely manner -Number of grievances escalated to national courts and the World Bank Grievances Redress Service and Inspection Panel. 		
Environmental Impacts						

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Vegetation clearance	<ol style="list-style-type: none"> 1. Clear only the necessary areas 2. Ensure proper demarcation and delineation of the project area to be affected by construction works. 3. Specify locations for vehicles and equipment, and areas of the site which should be kept free of traffic, equipment, and storage. 4. Designate access routes and parking areas 5. Re-vegetation including planting of trees around the plant/facility 	Construction	Contractor	<ul style="list-style-type: none"> -Number of trees cleared -Planted trees 	Once off	50,000.00
Soil erosion	<ol style="list-style-type: none"> 1. Avoid groundbreaking during the seasons of high rainfall to avoid erosion. 2. Monitoring of areas of exposed soil during rainy seasons to ensure that any incidents of erosion are quickly controlled. 	Construction	Contractor	Assess size of rills or Gulleys forming from accelerated run off from compacted areas	Quarterly	Part of contractor's fee

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>3. Construction related impacts like erosion and cut slope destabilizing should be addressed through landscaping and grassing, carting away and proper disposal of construction materials</p> <p>4. Use silt traps where necessary</p> <p>5. Cover soil stock piles</p> <p>6. Landscaping with grass on areas without electrical installation (lower areas)</p> <p>7. Monitoring of areas of exposed soil during rainy seasons to ensure that any incidents of erosion are quickly controlled.</p>					

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Contamination of soil from fossil fuels	<ol style="list-style-type: none"> 1. Ensure waste water generated is discharged or drained into approved drainage facilities 2. Construction vehicles must be maintained in good state and proper servicing to ensure no oils are likely to leak 3. Care must be exercised not to spill any fossil fuels 4. Any contaminated soil shall be scooped and disposed-off appropriately. 5. No servicing vehicles on site 	Construction	Contractor	Records of any leakages from construction equipment/ vehicles.	Quarterly	50,000.00
Dust emissions	<ol style="list-style-type: none"> 1. The construction area should be fenced off to reduce dust to the public 2. Suppress dust during dry periods by use of water sprays; 3. Stockpiles of excavated soil should be enclosed/covered/watered during dry or windy 	Construction	Contractor	-Visual Observation of dust -Provision of PPEs especially masks	Daily	100,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>conditions to reduce dust emissions.</p> <p>4. Burning of woody debris & construction waste to be prohibited</p> <p>5. Use of personnel protective equipment (PPE) -masks should be provided to all personnel in areas prone to dust emissions</p> <p>6. Restrict speed on loose surface roads during dry or dusty conditions</p> <p>7. Keep stockpiles and exposed soils compacted and re-vegetate as soon as possible.</p> <p>8. Construction trucks moving materials to site, delivering sand and cement to the site should be covered to prevent material dust emissions into the surrounding areas</p>					

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	9. Plant short trees to break speed of wind					
Vehicle exhaust and emissions from Generator	<ol style="list-style-type: none"> 1. Drivers of construction vehicles must be sensitized so that they do not leave vehicles idling so that exhaust emissions are lowered. 2. Maintain all machinery and equipment in good working order to ensure minimum emissions of carbon monoxide, NO_x, SO_x and suspended particulate matter 3. Maintain equipment in good running condition – no vehicles to be used that generate excessive black smoke 4. Use of diesel which is Sulphur- free to run the power producing 	Construction	Contractor	-Engine maintenance records - inspection of stacks	Quarterly	100,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>generators to be encouraged</p> <p>5. The stack chimney of the generators will be increased from its normal height of 3 meters to 6 meters</p>					
Solid waste generation	<p>1. Ensure spoil from excavations is arranged according to the various soil layers. This soil can then be returned during landscaping and then rehabilitation, in the correct order which they were removed that is top soil last;</p> <p>2. Segregate waste</p> <p>3. Provide litter collection facilities such as bins</p> <p>4. Contractor to put in place and comply with a site waste management plan</p> <p>5. The contractor should comply with the requirement of OSHA ACT 2007 and Building</p>	Construction	Contractor	Presence of well-maintained receptacles and centralized collection points	Quarterly	100,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>rules on storage of construction materials</p> <p>6. Use of durable, long-lasting materials that will not need to be replaced as often, thereby reducing the amount of waste generated over time</p> <p>7. Recovery of materials remains and return to stores</p> <p>8. Re-use of materials where possible</p> <p>9. Proper budgeting to avoid waste generation</p> <p>10. Proper disposal of waste in line with solid waste regulation</p> <p>6. Construction wastes to be managed in accordance with construction standards in Kenya</p>					
Impacts on Water Resources	1. Clear the necessary areas only.	Construction	Contractor	-Oil spill containment plan.	Quarterly	150,000

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
and Water Quality	<p>2. Appropriate remedial measures shall be implemented by the contractor in the event of erosion.</p> <p>3. Infrastructure shall be designed to ensure that contaminated run-off does not reach water source i.e., earth dam.</p> <p>4. Contractor to develop an oil-spill containment plan as part of the emergency response plan. In the event of an oil spill the procedures contained in the emergency response plan of the contractor will come into effect.</p> <p>5. No vehicle maintenance and service shall be done at project site</p> <p>7. Ensure that potential sources of petro-chemical pollution are handled in such a way to</p>			-Provision of fuel/oil drip and spill trays		

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	reduce chances of spills and leaks.					

Noise & vibration	<ol style="list-style-type: none"> 1. Construction activities to avoid any unchanneled flow of water at the site 2. Storage areas that contain hazardous substances should be bunded with an approved impermeable liner and provision for a pit to be made in case of oil spill. 3. The excavation and use of rubbish pits during construction should be strictly prohibited. 4. A waste disposal area should be designated within the active construction area and this should be equipped with suitable containers i.e., skips or bins of sufficient capacity and designed to contain and prevent refuse from being blown by wind, 11. Areas contaminated by spilled concrete and/or fuels and oils leaking from vehicles and 	Construction	Contractor	<u>Noise levels-</u> Records of noise measurements done by contractor within the project area and at distances of 30m from the Solar mini-grid	Quarterly	150,000.00
------------------------------	--	--------------	------------	---	-----------	------------

	machinery should be cleaned immediately					
--	--	--	--	--	--	--

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Impacts from Hazardous materials -	<ol style="list-style-type: none"> 1. Maintenance of construction vehicles will not be done on site 2. All hazardous products and waste should be labeled and handled properly to avoid contact with the ground 3. Dispose hazardous waste through a NEMA approved waste handler 	Construction	Contractor	Presence of well-maintained receptacles and centralized collection points	Quarterly	100,000.00
Accidental Oil Spills or Leaks	<ol style="list-style-type: none"> 1. In the event of accidental leaks, contaminated top soil should be scooped and disposed of appropriately. 2. Refueling and maintenance of vehicles will not take place at the construction site. 3. Create awareness for the employees on site on procedures of dealing with spills and leaks 4. Vehicles and equipment must be serviced 	Construction	Contractor	Records of all accidental spills and number of liters	Quarterly	150,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>regularly and kept in good state to avoid leaks.</p> <p>5. In case of spillage the contractor should isolate the source of oil spill and contain the spillage using sandbags, sawdust, absorbent materials and/or other materials approved by materials.</p> <p>6. All chemicals should be stored within the bunded areas and clearly labeled detailing the nature and quantity of chemicals within individual containers.</p>					
Fire Hazards	<p>1. Create awareness to the construction workers on potential fire hazards</p> <p>2. Provision of firefighting equipment on site during construction.</p> <p>3. No smoking shall be done on construction site</p>	Construction	Contractor	<p>-Records of any Fire incidences</p> <p>-Fire equipment and evacuation plan</p>	Quarterly	100,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>4. 'No smoking' signs shall be posted at the construction site</p> <p>5. A fire risk assessment and evacuation plan should be prepared and must be posted in various points of the construction site including procedures to take when a fire is reported.</p> <p>6. Designate an assembly point</p>					
Impacts of construction material sourcing (e.g., quarrying)	<p>1. Source all building materials such as stone, sand, ballast and hard core from NEMA approved sites.</p> <p>2. Ensure accurate budgeting and estimation of actual construction materials to avoid wastage.</p> <p>3. Reuse of construction materials where possible.</p>	Construction	Contractor	Sources of raw materials (from local community)	Quarterly	Part of contractor's cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Increased water demand	<ol style="list-style-type: none"> 1. Prudent use of available water 2. Consultations with the project local committee on use of water in the community to avoid conflicts with the community 3. Source and utilize a sustainable and reliable water supply for both construction and operation phase. 	Construction	Contractor	Water usage records	Quarterly	Part of contractor's cost
Energy Consumption	<ol style="list-style-type: none"> 1. Ensure responsible electricity use at the construction site through sensitization of staff to conserve electricity by switching off electrical equipment or appliances when they are not being used. 2. Proper planning of transportation of materials will ensure that fossil fuels (diesel, 	Construction	Contractor	Energy consumption records	Quarterly	No additional cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>petrol) are not consumed in excessive amounts.</p> <p>3. Complementary to these measures, they monitor energy use during construction and set targets for reduction of energy use.</p>					
Occupational Health and safety Impacts	<p>1. Use skilled personnel for activities which demand skills/technical tasks</p> <p>2. Awareness creation/Tool box talks on safety to workers while at construction site</p> <p>3. Workers coming to the site should be knowledgeable on safety precautions to take</p> <p>4. Appropriate PPE (helmet, safety harness, boots, masks, climbing irons)</p> <p>5. Proper general house keeping</p> <p>6. Close supervision of workers</p>	Construction	Contractor	<p>Records of any near misses, incident, and accidents.</p> <p>Records of corrective actions implemented if there was an accident.</p>	Quarterly	1,000,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<ul style="list-style-type: none"> 7. Risk assessment by contractor of the construction activities and implement mitigation measures appropriately 8. Adherence to occupational Safety and Health Act 2007 9. Availability of equipped first aid box on site 10. Provide safe drinking water for workers 11. Engagement of trained first aider on site 12. Ensure the WIBA cover is taken for the staff 13. Establish safety committees 					
Community safety – access	<ul style="list-style-type: none"> 1. Proper barricading 2. Hazard communication. 3. Controlled access to the site by designated personnel 4. Maintain records of any person who comes to site 	Construction	Contractor	Presence of a controlled access and records of every person accessing the site	Daily	20,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Public Health Impacts	<ol style="list-style-type: none"> 1. Sensitize workers and the community on prevention and mitigation of HIV/AIDS and other sexually transmitted diseases, through staff training, awareness campaigns and community <i>Barazas</i>. 2. Awareness creation and consultations with local communities prior and during construction on the dangers of these diseases 3. Informing workers on local cultural values and health matters. 4. Provision of condoms to workers 5. Allowing migrant workers time to be with their families 	Construction	Contractor	Number of awareness creation sessions conducted. -Availability of and distribution of condoms	Quarterly	20,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>6. The contractor is impressed upon not to set a construction camp on site.</p> <p>7. The contractor will provide public education/information about HIV/AIDS transmission and prevention measures.</p> <p>8. Ensure equal treatment of workers</p> <p>9. Provide all appropriate COVID-19 preventive measures including campaign to maintain individual measures at the workplace.</p>					
Sanitary waste	1. Construct/ install pit latrines for both genders clearly labelled	Construction	Contractor	Presence of separate and clean washrooms for both the gents and ladies	Quarterly	300,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Solid Waste Generation	<ol style="list-style-type: none"> 1. Provide waste handling facilities such as labeled waste bins 2. Emphasis on prudent waste generation and give priority to reduction at source 3. Solid waste management awareness to operators 4. Operator to contract a NEMA licensed waste handler to collect and dispose solid waste 	Operation	O&M Contractor and KPLC	Presence of well-maintained receptacles and centralized collection points	Quarterly	50,000.00
Liquid Waste/Oils Generation	<ol style="list-style-type: none"> 1. Proper storage of the oil is required to ensure no leakages 2. Frequent inspection and maintenance of the generator to minimize leakages. 3. No vehicles should be serviced or maintained at the Mini-grid area. 4. The waste oil or used oil must be disposed-off appropriately. 	Operation	O&M Contractor and KPLC	-Engine maintenance records -Oil spill containment plan	Quarterly	200,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	5. Proper training for the handling and use of fuels for the operators of the Mini-grid. 6. In the event of accidental leaks, contaminated top soil should be scooped and disposed of appropriately.					
Increased oil Consumption	1. Efficient energy consumption 2. Install an energy-efficient lighting system	Operation	O&M Contractor and KPLC	Energy consumption records	Quarterly	No additional cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Increased storm water flow	<ol style="list-style-type: none"> 1. Construct the drainage system in a way to follow natural drain of the water 2. Concrete only the required area and leave the rest of the land with vegetation like grass 3. Construct rain water harvesting system on the control buildings/office and harness into storage tanks for use 	Operation	O&M Contractor and KPLC	Provision of a drainage system and a rain water harvesting system	Quarterly inspections	200,000.00
Fire Outbreaks	<ol style="list-style-type: none"> 1. The power plant must contain firefighting equipment (Portable fire extinguishers) of recommended standards and in key strategic points 2. Detection/alarm systems that can detect fire should be and installed 	Operation	O&M Contractor and KPLC	-Provision of serviced fire equipment, evacuation plan and safety signages -Records of fire safety training	Quarterly	50,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<ul style="list-style-type: none"> 3. A fire evacuation plan should be prepared and posted at strategic points and should include procedures to take when a fire is reported. 4. Workers especially operators of the plant must be trained on fire management 5. 'No smoking' signs shall be posted within the Mini-grid area 6. A fire Assembly point should be identified and marked 					
Visual Impacts	1. Fence round the solar Mini-grid to keep off/screen the solar panels.	Operation	O&M Contractor and KPLC	Presence of a perimeter fence	Quarterly inspections	No additional cost
Water demand	<ul style="list-style-type: none"> 1. Ensure prudent use of water. 2. Install water-conserving automatic taps. 3. Any water leaks through damaged pipes and 	Operation	O&M Contractor and KPLC	Water usage records	Quarterly	20,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	faulty taps should be fixed promptly.					
Sanitary waste	<ol style="list-style-type: none"> 1. Provide sanitary waste facilities for both genders clearly marked 2. Disposal of waste through septic tanks 	Operation	O&M Contractor and KPLC	Presence of separate and clean washrooms for both the gents and ladies	Quarterly	No additional cost
Flooding	<ol style="list-style-type: none"> 1. Ensure drainage channels are free of any obstruction at all times i.e., not blocked 2. Construct more channels and or expand existing ones 3. Raise foundations of the solar panels and ensure a proper and from concrete base 4. Create flooding diversions and or spill ways to divert water from getting into the solar power facility 	Operation	O&M Contractor and KPLC	-Provision of drainage system -Raised foundations for the structures	Quarterly	100,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Occupation health and Safety	<ol style="list-style-type: none"> 1. Ensure only qualified staff are employed to work in the facility 2. All workers operating the Mini-grid must be equipped with appropriate and adequate person protective equipment (PPE) such as; safety footwear, helmet among others. 3. Operators must be skilled on firefighting management 4. Annual environmental audits should be done 5. WIBA cover for staff is mandatory 	Operation	O&M Contractor and KPLC	<ul style="list-style-type: none"> -Provision of PPEs and WIBA cover -Environmental audit reports 	Quarterly	100,000.00
Hazardous waste-damaged panels	<ol style="list-style-type: none"> 1. Segregation from other waste streams 2. Proper disposal through a NEMA approved/licensed handler 	Operation	O&M Contractor and KPLC	Presence of well-maintained receptacles and centralized collection	Quarterly	200,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Noise and Vibration	<ol style="list-style-type: none"> 1. Generator room should be sound proof to ensure no noise of a nuisance level will be produced. 2. Monitor noise levels 	Operation	O&M Contractor and KPLC	Noise levels- Records of noise measurements done by contractor within the project area and at distances of 30m from the Solar mini-grid	Quarterly	Part of contractor's cost
Shocks and electrocutions	<ol style="list-style-type: none"> 1. Inspect the wiring of the houses before connecting power 2. Safety awareness campaigns to the community before connection of power on safety precautions such as: <ul style="list-style-type: none"> o Require community to engage a certified technician to do wiring in the premises 	Operation	O&M Contractor and KPLC	-Records of awareness sessions conducted -Incidences report	Quarterly	No additional cost

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<ul style="list-style-type: none"> ○ Use of quality materials while wiring ○ Refraining from individual illegal extensions of power lines to other houses ○ Observing safety measures while using electricity such as not touching sockets and switches with wet hands or wiping with wet cloths ○ Keeping off all electricity infrastructure e.g., not tying livestock on 					

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>electric poles, no cutting earth wires that run along some electric poles, not interfering with sockets or switches</p> <ul style="list-style-type: none"> ○ Reporting any electric wire/conductors if found fallen on the ground ○ Report any incident regarding electricity at the local office –staff in charge of operating the Mini-grid 					

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Community Safety- Access to site by general public	<ol style="list-style-type: none"> 1. Fencing off the facility to keep of community members, children and livestock from entering into the facility 2. Controlled access to the site only with prior approval 3. Maintain records of any person who comes to site 	Operation	O&M Contractor And KPLC	Presence of a controlled access and records of every person accessing the site	Daily	Part of contractor's cost
Risks related to poor or inadequate stakeholder engagement (Conflict)	<ol style="list-style-type: none"> 1. Employ from the community to the extent possible 2. Engage the community members and other stakeholders in a timely manner 3. Work closely with the GRM committee members in solving the conflicts 4. Solve all conflicts/grievances at the earliest time possible 5. Ensure all grievances are logged and closed 	Operation	O&M Contractor, KPLC	Grievance records	Quarterly	20,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	6. Monitoring the pattern of grievances to come up will long term measures					
Gender Based Violence – SEA and SH	To manage GBV risks, the contractor will prepare a SEA/SH Prevention and Response Action Plan that will include a GRM that ensures confidentiality. The plan will include the necessary measures for prevention and response and must ensure survivor-based approach	Operation	Contractor	-SEA/SH Prevention and Response Action Plan -Grievance records	Quarterly	20,000.00
Public Health Impacts – HIV/AIDS	1. Sensitize workers and the community on prevention and mitigation of HIV/AIDS and other sexually	Operation	O&M Contractor and KPLC	Number of awareness creation sessions conducted.		20,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>transmitted diseases, through staff awareness and awareness campaigns for the community</p> <p>2. Provision of condoms to workers</p> <p>3. Allowing migrant workers time to be with their families</p>			-Availability of and distribution of condoms		
Public health Impacts - Covid 19 disease	<p>1. Social distance must be observed</p> <p>2. Provision of hand wash facilities before access</p> <p>3. Temperature check and monitoring of the temperature of workers and any other person coming to site</p> <p>4. Enforce wearing of masks</p> <p>5. Make provision for testing and treating especially of workers</p> <p>6. Provision of contact numbers for the nearest</p>	Operation	Contractor	<p>Availability of hand washing facilities</p> <p>Utilization of hand washing facilities</p> <p>Number of Covid-19 cases reported</p>	Quarterly	30,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>health facility for testing and treatment</p> <p>7. Adhering to any other measures from the ministry of health which may be issued from time to time</p>					
Dust Emission	<p>1. Trees can be planted around the plant/facility provided they do not cast shadows to the solar panels to act as wind breakers and hence decrease dust pollution</p> <p>2. Ensure planting of grass around and within the facility compound</p>	Operation	Contractor	Visual inspection	Quarterly	50,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
Vehicle Exhaust Emissions	<ol style="list-style-type: none"> 1. Drivers of the vehicles must be sensitized so that they do not leave vehicles idling so that exhaust emissions are lowered. 2. Company vehicles should be well maintained 	Operation	Contractor	Engine maintenance records	Quarterly	No additional cost
Noise and Vibration	<ol style="list-style-type: none"> 1. Install portable barriers to shield compressors and other small stationary equipment where necessary. 2. Use quiet equipment (i.e., equipment designed with noise control elements). 3. Co-ordinate with relevant agencies in case the noise produced will require a license. 4. Limit pickup trucks and other small equipment to 	Decommissioning	Contractor	<u>Noise levels-</u> Records of noise measurements done by contractor within the project area and at distances of 30m from the Solar mini-grid	Once off	20,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>a minimum idling time and observe a common-sense approach to vehicle use and encourage workers to shut off vehicle engines whenever possible.</p> <p>5. Demolish mainly during the day when most of the neighbors are out working.</p>					
Solid Waste Generation	<p>1. Demolition contractor to adhere to the various manufacturer's guidelines and requirements regarding demolition and disposal</p> <p>2. Segregation of waste in order to separate hazardous waste from nonhazardous waste and other streams of waste</p> <p>3. Provision of facilities for proper handling and</p>	Decommissioning	Contractor	Presence of well-maintained receptacles and centralized collection points	Daily	700,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	<p>storage of demolition materials to reduce the amount of waste caused by damage or exposure to the elements</p> <p>4. Adequate collection and storage of waste on site</p> <p>5. Safe transportation to the disposal sites / designated area</p> <p>6. Hazardous waste must be disposed by NEMA approved waste handler</p>					
Dust Emissions	1. Cover all trucks hauling soil, sand and other loose materials or require all trucks to maintain at least two feet of freeboard	Decommissioning	Contractor	Visual inspection	Daily	20,000.00
Public Health- HIV/AIDS	The project will sensitize workers and the surrounding communities on prevention and mitigation of HIV/AIDS and other sexually transmitted diseases, through staff training and	Decommissioning	Contractor	Records of awareness creation sessions conducted. -Availability of and distribution of condoms	Once off	20,000.00

Potential Impacts	Recommended Mitigation Measures	Project phase	Responsibility	Monitoring Indicator	Frequency	Estimated Cost (Ksh)
	awareness campaigns/ to the community.					
	Total					4,380,000.00

1.1 Approach to Environmental Impact Management

The proposed ESMMP will be the responsibility of the proponent and the contractor as outlined. This section presents the range of approaches that will be used to manage potential impacts of the proposed project.

7.4 MANAGEMENT PLAN DURING CONSTRUCTION PHASE

The contractor will prepare targeted management plans to deal with specific environmental and social aspects guided by the ESMMP and any other emerging issues on the ground. The contractor shall prepare these plans and have them approved by both the proponent and the Bank before they mobilize to the site:

- Construction management plan
- Rehabilitation and site closure plan
- Local recruitment plan
- Workplace health and safety plan
- Community safety plan
- Emergency management and response plan
- SEA/SH Prevention and Response plan
- Stakeholder Engagement management plan
- Grievance Redress mechanism
- Labor influx management plan

7.4.1 Construction Management Plan

The construction management plan for the proposed project shall include the following:

a) Management of Fuels and other Hazardous Materials

- The Contractor shall comply with all applicable laws, regulations, permit and approval conditions and requirements relevant to the storage, use, and proper disposal of hazardous materials.

b) Management of the Construction Site

- The contractor shall prevent littering and the random discard of any solid waste on or around the construction site
- The contractor shall manage other solid and liquid waste

c) Fire Prevention and Management

- The Contractor shall take all necessary precautions to prevent fires caused either deliberately or accidentally during construction process.
- The Contractor shall prepare a fire prevention and fire emergency plan as a part of the plans to be submitted to REREC.

d) Management of Air Quality

- The Contractor shall institute appropriate measures to minimize or avoid air quality impacts. This can be achieved through formulation of air quality management plan.

e) Neighboring Landowner and Occupier Relations

- The Contractor shall respect the property and rights of neighboring landowners and occupiers at all times and shall treat all persons with deliberate courtesy.

- The contractor shall respect any special agreements between the REREC and the neighbours e.g., the wayleaves agreements signed between Kenya power and landowners will need to be respected by the contractors.

f) Complaints Register

The contractor shall establish and maintain a register for periodic review by the REREC that logs all the complaints raised by the neighbours or the general public about construction activities. The register shall be regularly updated, and records maintained including the name of the complainant, his/her domicile and contact details, the nature of the complaint and any action taken to rectify the problem.

g) Construction Control

The construction control for the proposed project shall cover the following:

Control of Access

The contractor shall ensure that the construction site is accessed by authorized persons only and up-to-date records kept

i) Control of material supply and burrow areas

- The contractor shall, as far as possible, source all material needed to construct the proposed project from the licensed quarries
- In instances where materials are to be obtained from a new burrow area; the contractor shall comply with relevant legislations.
- The contractor shall prepare a method statement including plans, detailing the expected quantity of excavation, temporary and permanent drainage control, the final contouring of the burrow pit and the proposed method of rehabilitation.

7.4.2 Rehabilitation and Site Closure Plan

- After completion of construction activities, the contractor shall clear the site of construction materials and dispose wastes in appropriate disposal sites.
- The contractor shall remove all temporary works on the construction site and grow grass on areas that are not covered by the installations to control erosion

7.4.3 Local Recruitment Plan

The contractor will prepare a local recruitment plan to guide on recruitment of locals. The plan shall pay attention or adhere to Employment Act.

In designing the local recruitment plan contractor shall:

- Comply with the provisions of Employment Act, 2007
- Wherever possible, give priority to qualified local people when hiring employees.

The mitigation measure is:

- Prepare a local recruitment strategy that is fair and transparent to ensure all community segments - men, women, vulnerable individuals, minority clans, and VMGs who meet OP 4.10 criteria) - can access subproject benefits during construction and that prioritizes hire of locals for skilled, semi-skilled and unskilled labour.

7.4.4 Workplace Health and Safety Plan

The workplace health and safety plan to be implemented by the contractor and REREC shall include the following key measures:

- The contractor shall comply with all relevant legislative requirements governing worker health and safety at the work place (e.g., OSHA 2007 and its subsidiary legislations).
- The contractor shall prepare and implement measures to minimize diseases likely to be contracted by the construction workers as a result of the proposed project such as HIV & AIDs and other communicable diseases
- The contractor shall have obligations of managing the safety of its employees by;
 - Provision of appropriate PPEs to employee
 - Training employees on competence
 - Employing competence and qualified staff
 - Provision of First Aid Kits onsite
 - Should have a trained first aider
 - Document and create awareness on safe work procedures and work instruction
- The contractor will manage accidents by having an emergency response plan which will include contacts for emergency service providers e.g., ambulances, fire brigade and nearest hospitals
- Health and safety performance will be continuously monitored, and procedures reviewed with the aim of eliminating risk as far as reasonably practicable.

7.4.5 Community Health and Safety Plan

The community health and safety plan to be implemented by the contractor shall include:

- Adherence to OSHA 2007 Act and its subsidiary legislations to ensure that health and safety of immediate neighbors and the public is not threatened.
- The contractor to ensure that construction work is undertaken in manner not likely pose risks to community health and safety.
- The contractor shall undertake an independent risk assessment prior to construction. The findings of this assessment will inform the development of a community safety plan and create awareness to the community on the same

7.4.6 Emergency Preparedness Plan

The Contractor shall develop an emergency plan that will enable rapid and effective response to all types of environmental emergencies in accordance with recognized national and international standards.

The emergency plan shall include establishment of a network of communication between the Contractor and emergency services including police, ambulance services, and fire brigades among others.

7.4.7 SEA/SH Prevention and Response Action Plan

The contractor will prepare a SEA/SH Prevention and Response Action Plan that will include a GRM that ensures confidentiality. The plan should have an Accountability and

Response Framework. The plan will include the necessary measures for prevention and response of GBV impacts.

The mitigation measures shall include:

- Ensure that local employment opportunities are equitably accessible to all segments of the community,
- Ensure equal pay for equal work
- Prepare and implement GBV (SEA/SH management) plan that includes sensitisation of community members and subproject workers on the potential of the subproject giving rise to, exacerbating and/or mitigating SEA and SH, and the appropriate mitigation measures
- Map all GBV service providers and document referral services for survivors, and, sensitize community members and subproject workers on the referral pathways.
- Prepare and implementing a functional and accessible contractor GBV GRM for use by workers and community members (as appropriate).
- The GBV GRM should allow for anonymous incident reporting and should be GBV survivor-centric
- Sensitize community members and workers on contractor GRMs
- Prepare and sensitise Code of Conduct (CoC) for SEA and SH, and their responsibilities for the same, to demystify the stigma associated with SEA and SH

7.4.8 Stakeholder Engagement Management Plan

A Stakeholder Engagement Plan is a formal approach to communicate with project stakeholders to achieve their support for the project. The plan prepared shall specify the frequency and type of communications, media, contact persons, and locations of communication events. The SEP is a useful tool for managing communications between the contractor and other stakeholder. The plan should meet the following objective of a SEP.

- To help improve project design and implementation
- To inform third parties about changes that affect them
- To take their views into account in the implementation of projects
- To identify adverse impacts and mechanisms to enhance project benefits
- To identify risks from and to a project
- To increase project ownership and sustainability
- To comply with Bank policies that require consultations

The plan shall put this measure in to consideration:

- In consultation with the identified stakeholders, prepare a stakeholder engagement plan (SEP) that is based on their locations (maps) and their information needs at the various subproject phases

7.5 GRIEVANCE REDRESS MECHANISM

7.6 7.5.1 INTRODUCTION

Grievance mechanisms should receive and facilitate resolution of the affected institutional or communities' concerns and grievances. Community concerns should be addressed promptly using an understandable and transparent process that is culturally

appropriate and readily acceptable to all segments of affected communities, at no cost and without retribution. Mechanisms should be appropriate to the scale of impacts and risks presented by a project. Grievances can be an indication of growing stakeholder concerns (real and perceived) and can escalate if not identified and resolved. The management of grievances is therefore a vital component of stakeholder management and an important aspect of risk management for a project. Projects may have a range of potential adverse impacts to people and the environment in general, identifying grievances and ensuring timely resolution is therefore very necessary. As such the project has developed a grievance management process to serve as a guide during project implementation.

The constitution of Kenya section 159, Land and Environmental Court Act 2011, National Land Commission Act 2012, and Land Act 2012 advocates for alternative dispute resolution mechanisms before seeking formal legal redress in disputes relating to environment, land, and resettlement. In practice this can be the village head and other local or traditional dispute resolution mechanisms.

The Land Act 2012 and National Land Commission Act 2012 obligate the NLC to support grievances and disputes related to resettlement or land amicably in conjunction with the implementing agencies REREC. REREC will be expected to put in place mechanisms and structures that arbitrate or negotiate with PAPs whenever there are any grievances concerning land or environment.

7.7 GRIEVANCE MECHANISM

One of the key roles of the Grievance Redress Committees, is to address disputes led by the administrative chiefs. All PAPs will be informed how to register grievances or complaints, including specific concerns about land and environment. The PAPs will be informed about the dispute resolution process, specifically about how the disputes will be resolved in an impartial and timely manner. Environmental and Land Court will provide opportunity for appeal when a solution will not be found using the established local mechanisms. The court will deal with land related disputes. However, the Land Act 2012 and Environment and Land Court Act 2011 advocates for Alternative Dispute Resolution (ADR) methods in tackling land related disputes. Alternative dispute resolution approaches will be given preference and based on customary rules, arbitration, or third-party mediation. ADR will be promoted or defended as a resolution to disputes related to land.

7.8 COUNTY GRIEVANCE REDRESS COMMITTEES (CGRC)

CGRC has been established at the county level to ensure participatory and transparent implementation of the project. The CGRC will help the project carry out its mandate efficiently- particularly ensuring effective communication with the communities.

Members to **CGRC** will include representation from the following agencies and entities

1. Representative of NLC, to grant legitimacy to the acquisition process and ensure that legal procedures as outlined in Land Act 2012
2. Representative of the implementing agency
3. Representative of NEMA to handle environmental issues
4. The County Administration representative, which will provide the much-needed community mobilization, and support to the sub-project.

5. County Land Survey Officer will survey all affected land and produce maps.
6. The County Gender and Social Development Officer who will be responsible for ensuring gender programs are adhered to.
7. The County Lands Registrar will verify all affected land and validate the same.
8. Two PAP representatives from Location Grievance Resettlement Committee – act as voice for the PAPs
9. NGOs and CBOs locally active in relevant fields

The CGRC will have the following **specific responsibilities:**

- a) Ensuring effective flow of information between PAPs and the implementing agency
- b) Coordinate Locational Grievance Redress Committees (LGRC)
- c) Coordinate activities between the various organizations involved; facilitate grievance and conflict resolution; and provide support and assistance to vulnerable groups.
- d) Conducting extensive public awareness and consultations with the affected people so that they can air their concerns, interests, and grievances.
- e) Resolving disputes that may arise within the project. If it is unable to resolve any such problems, channel it to the National Grievance Redress committee before utilizing the appropriate formal grievance procedures.

7.9 LOCATIONAL GRIEVANCE REDRESS COMMITTEE (LGRC)

Since counties are large, further decentralized Grievance Redress Committee for Kanukurdio was established and will handle the grievances arising from Kanurdio solar off grid project.

At the time of assessment, the committee was also constituted on the same day during the land acquisition forum. The membership of LGRCs were elected from each category of PAPs except the locational Chief and assistant chiefs who will be automatic members of the team by virtue of their positions.

The implementing agency representatives present during this forum included MOEP, KPLC and REREC (County Renewable Energy Officer). They held a consultative forum with the community and constituted an LGRC consisting of seven (8) members. The members consisted of two (3) ladies, two (3) men and two (2) youth, village administrator all identified and elected from each category of PAP except for the location Chief and village administrator who are automatic members of the team.

It was however identified that the LGRC was yet to formulate a leadership structure by electing their chairperson and secretary among themselves as at the time of assessment.

The LGRCs will work under guidance and coordination of CGRC and the implementing agencies. Their membership comprises of the following:

1. The locational Chief, who is the Government administrative representative at the locational unit and who deals with community disputes will represent the Government in LGRC
2. Assistant Chief, who supports the locational Chief and Government in managing local community disputes in village units will form membership of the team.

3. Female PAP, elected by women PAPs, will represent women and children related issues regarding the project
4. Youth representative, elected by youths, represents youth related concerns in the LGRCs
5. Male representatives elected by the members of the PAPs
6. Vulnerable persons representative will deal and represent vulnerable persons issues in the LGRCs.

The committee representatives present during the public consultation forum informed that they were yet to have an initial meeting and equally the members were yet to be informed of their specific roles on the project.

The LGRC will be assigned specific roles for the projects. The anticipated roles will include the following;

The roles of LRCCs will include among others:

- a) Conducting extensive public awareness and consultations with the affected people.
- b) Help ensure that local concerns raised by PAPs as regards to the project are promptly addressed by relevant authorities.
- c) Resolve manageable disputes that may arise relating to the project. If it is unable to resolve/help refer such grievances to the CGRCs instituted.
- d) Ensure that the concerns of vulnerable persons such as the disabled, widowed women, orphaned children affected by the sub project are addressed.
- e) Assist the community in recording grievances, including helping those who cannot write or read.
- f) Help the vulnerable groups access project benefits
- g) Ensure that all the PAPs in their locality are informed about the project

7.10 GRIEVANCE REDRESS MECHANISM

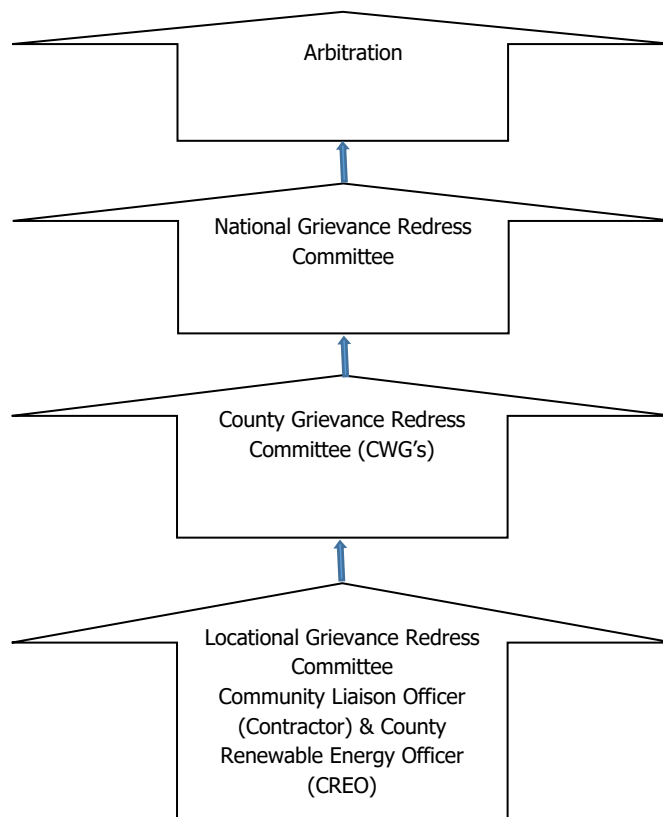


Figure 8. KOSAP Grievance Redress Mechanism

It should be noted that if complainants are not satisfied with the grievance process, even after arbitration they have the right to present their complaint through the court system.

It is expected that most disputes will be resolved at the lowest level- Locational Grievance Redress Committee and since most disputes arise during the Construction and operation period the contractor's Environmental and Social Safeguard team specifically the Community Liaison Officer will work closely with the community to be able to resolve disputes

Responsibilities of the Community Liaison Officer include.

- Monitor day to day Implementation of the Project
- Address grievances as they arise on the project
- A member of the Locational and County Grievances Redress Management Committee to respond on issues that may have been brought to the attention of the committee before escalating to the National Grievance Redress Committee
- Escalate grievances internally to get a lasting solution

7.11 WORLD BANK GRIEVANCES REDRESS MECHANISM

The World Bank has established 2 grievance redress mechanisms that provide avenues for individuals and communities to submit complaints directly if there is belief that they have been, or are likely to be, adversely affected by a World Bank-funded project. In this project PAPs and other stakeholders have the right to know and access at no cost these GRMs as described below.

World Bank Grievances Redress Service

The Grievance Redress Service (GRS) is an avenue for individuals and communities to submit complaints directly to the World Bank if they believe that a World Bank-supported project has or is likely to have adverse effects on them, their community, or their environment. The GRS enhances the World Bank's responsiveness and accountability to project-affected communities by ensuring that grievances are promptly reviewed and addressed. Complaints must be in writing and addressed to the GRS and sent through the following methods namely:

Those aggrieved or their representatives can report their complaints through the following mediums; (i) Online by accessing the online form; (ii) Sending an Email to grievance@worldbank.org; or (iii) Submitting a letter to the World Bank Headquarters in Washington D.C., United States or World Bank Kenya County Office.

World Bank Inspection Panel

The Inspection Panel is an independent complaints mechanism for people and communities who believe that they have been, or are likely to be, adversely affected by a World Bank-funded project. The Panel is an impartial fact-finding body, independent from the World Bank management and staff, reporting directly to the Board. The Inspection Panel process aims to promote accountability at the World Bank, give affected people a greater voice in activities supported by the World Bank that affect their rights and interests, and foster redress when warranted. In September 2020, the Board updated the resolution that created the Panel and added to the Panel functions. At the same time, the Board approved a resolution establishing the World Bank Accountability Mechanism (AM). The new AM began operations in early 2021 and houses the Panel to carry out compliance reviews and a new Dispute Resolution Service (DRS), which will give complainants another way to have their concerns addressed. Contacts for registration of complaints to the IP are; (i) Tel: +1 202 458 5200; and (ii) Email: ipanel@worldbank.org.

Government Management of Land Acquisition Disputes

The Environment and Land Court, established under the Environment and Land Court Act 2011, is a superior court (with offices across the country) that hears and determines disputes relating to land and the environment. Likewise, the Land Acquisition Tribunal established under the Land Act 2012; (PART VIIIA 133A) has jurisdiction to hear and determine appeals from the decision of the NLC on the process of compulsory acquisition of land. Therefore, in the first instance, such appeals are referred to the Tribunal. However, a party dissatisfied with the decision of the Tribunal

may appeal to the Environment and Land Court on a question of law only. The regulations to set the Land Acquisition Tribunal established under the Land Value (Amendment) Act of 2019 are underway. Besides, the Judicial Service Commission will chair the Land Acquisition Tribunal once operational.

7.11.1 Labor Influx Management Plan

The purpose of this plan is to provide a clear set of actions and responsibilities for the control of impacts linked to in-migration within the Project's area of influence. This plan will be regularly reviewed and updated to reflect revised Project design, socio-economic changes and learning experienced during its implementation.

The objectives of this plan are as follows:

- Monitor the scale of project induced in-migration into the project area and specific in-migration 'hotspots';
- Support local government and communities to manage both internal and external immigration into the project area; and
- Mitigate and manage any negative impacts and enhance and promote any positive impact related to labor influx.

The plan shall consider these measures:

- ❖ Prepare and Implement a Labour Management Plan (LMP) with policies and measures for ensuring that:
 - Subproject managers and workers are sensitised on:
 - ✓ County/National Labour laws
 - ✓ County/National Child Labour laws
 - ✓ National/International Forced Labour laws
 - Enforce:
 - ✓ The Code of conduct
 - ✓ County/National Labour laws
 - ✓ County/National Child Labour laws
 - ✓ National/International Forced Labour laws

7.11.2 Rehabilitation and Decommissioning Management Plan

The rehabilitation and decommissioning management plan include the following:

7.11.2.1 Planning for Closure

a) The implementing agency shall investigate practical options for closure of the facility at least one year before decommissioning and submit a report to relevant authorities NEMA included.

b) REREC shall develop rehabilitation and decommissioning plan in conjunction with relevant stakeholders at least one year before the end of facility's operations.

c) REREC shall explore options of re-use and recycling of the facility's components/structures.

7.11.2.2 Decommissioning

a) The REREC shall take into consideration the health and safety of personnel, contractors, neighbours and the public during the planning and implementation of the demolition process.

b) The REREC shall undertake a further survey to identify any contaminated areas and remediate them accordingly.

7.11.2.3 Post Closure

The REREC shall ensure that the facility's site is free of impacts associated with the closure and demolition

The REREC shall develop, rollout and implement a monitoring plan that includes:

- a) Monitoring of the rehabilitated site to confirm whether progress is satisfactory.
- b) Outline of how land improvement and future land use will be affected by the past operations and decommissioning of the associated infrastructure.

7.12 INSTITUTIONAL IMPLEMENTATION ARRANGEMENTS FOR THE PROPOSED PROJECT

This section presents roles and responsibilities of proponent, implementing agency, supervision consultant and contractor. The project is jointly implemented by the Ministry of Energy and Kenya Power. Specific roles are presented below;

7.12.1 Proponent -Ministry of Energy and Petroleum (MoEP)

The MoEP will provide overall coordination and oversight of the project. MOE will be responsible for overall responsibility for safeguards due diligence, and compliance monitoring. The MOE will also provide funding for the project planning and implementation.

7.12.2 KOSAP Project Implementation Unit

The MOE has already put in place a Project Implementation Unit (PIU) to guide implementation of the project. The PIU is already implementing the project. In the PIU Environmental and Social issues are spearheaded by an Environmental and Social Safeguards Expert whose role is to coordinate and oversee implementation of safeguards. The PIU reports to the MOE.

7.12.3 The Implementing Agency (REREC)

REREC will be responsible for implementation and operation of the project on behalf of the MOE. Some of the key responsibilities include but not limited to are;

- REREC will supervise construction works through a supervision consultant and also directly
- Monitoring the progress of the project in terms of the safeguards and technical aspects.
- Monitoring of the ESMMP implementation
- Ensuring the project is on course in terms of timelines

Note: *The Solar Mini-grid will be installed operated and maintained by the contractor for the first seven years and then handed over to REREC engineers and operators. So, for the 7 years REREC will be monitoring the operations of the contractor.*

7.12.4 County Government of Turkana

The County government is a key stakeholder. The roles of the county government include giving relevant approvals needed, assisting in process of allocating land for Mini-grid, solving grievances that cannot be sorted at project level, monitoring progress of the project among others.

7.12.5 National Environmental Management Authority

This authority is responsible for approval of ESIA report and licensing and is free to check progress of implementation of ESMMP

7.12.6 Roles and Responsibilities of the Supervising Consultant

- The consultant must appoint an ESHS officer who will be reporting on the ESMMP implementation supervision
- The consultant ESHS officer be required to generate various reports including production of minutes of monthly site visits and quarterly supervision reports detailing environmental, health, social and safety compliance on quarterly basis amongst other technical aspects
- Reporting on the ESMMP implementation progress and recommendations

7.12.7 Roles and Responsibilities of the Contractor

- Implementation of the contractor related aspects of the ESMMP and regularly (monthly) reporting
- The contractor on his part will have to appoint an EHS officer and a Social Specialist to coordinate and report on the ESMMP implementation respectively.
- The contractor to engage a Community Liaison Officer to act as a link between the community and the contractor and support the Social Specialist.
- The contractor will also have the obligation of managing the E&S risks related to his/her operations.
- Maintaining the required level of stakeholder engagement and communication, including providing project schedule information to the public, accepting and resolving public grievances, advertising and hiring local workers.
- Maintain a working grievance redress mechanism.
- The contractor is to comply with all regulations and by-laws at the county level and other relevant regulations and laws
- The contractor shall refer to ESIA recommendations and the ESMMP when preparing the contractors- ESMMP and the specific plans
- The contractor shall provide water required for use in connection with the works including the work of subcontractors and shall provide temporary storage tanks, if required
- The contractor shall make his own arrangements for sanitary conveniences for his workers. Any arrangements so made shall be in conformity with the public health requirements for such facilities and the contractor shall be solely liable for any infringement of the requirements.
- The contractor shall be responsible for all the actions of any subcontractors whom he subcontracts.
- The contractor shall take all possible precautions to prevent nuisance, inconvenience or injury to the neighboring properties and to the public generally, and shall use proper precaution to ensure the safety of the community

- All work operations which may generate noise, dust, vibrations, or any other discomfort to the workers and/or visitors of the client and the local community must be undertaken with care, with all necessary safety precautions taken.
- The contractor shall take all effort to muffle the noises from his tools, equipment and workmen to not more than 70dBA
- The contractor shall upon completion of working, remove and clear away all plant, rubbish and unused materials and shall leave the whole site in a clean and tidy state to the satisfaction of the Proponent. He shall also remove from the site all waste
- No shrubs, trees, bushes or underground thicket shall be removed except with the express approval of the proponent.
- No blasting shall be permitted without the prior approval of REREC and the local authorities.
- Borrow pits will only be allowed to be opened up on receipt of permission from the approving authorities.
- The standard of workmanship shall not be inferior to the Kenya Bureau of Standards where existing. No materials for use in the permanent incorporation into the works shall be used for any temporary works or purpose other than that for which it is provided. Similarly, no material for temporary support may be used for permanent incorporation into the works.
- Disposing of the waste generated during construction activities in accordance to the ESMMP.
- The contractor EHS officer will report on ESMMP implementation during construction period. The aspect to be reported by the contractor will include safety issues i.e. hours worked, recordable incidents and corresponding Root Cause Analysis (lost time incidents, medical treatment cases), first aid cases, incidents and accidents, potential near misses, and remedial and preventive activities required (for example, revised job safety analysis, new or different equipment, skills training etc.); Environmental incidents and near misses; noncompliance incidents with permits and national law; Training on E&S issues (dates, number of trainees, and topics); Details of any security risks; Worker & External stakeholder grievances and E&S inspections by contractor, including any authorities.

Environmental and Social concerns need to be part of the planning and development process and not an afterthought, it is therefore advisable that all the risks and impacts of the project be prevented and mitigated at the earliest opportunity possible to ensure smooth implementation of the project. Finally, a comprehensive Environmental and Social Management and Monitoring Plan (ESMMP) has been prepared and will guide in implementation of mitigation measures.

7.13 MANAGEMENT OF IMPACTS DURING OPERATION PHASE

The operation phase of the proposed project will be mainly power supply, line maintenance and clearing of wayleaves. A contractor (contracted to run the plant for a number of 7 years before handing over to REREC) will be responsible for all the mitigation measures for negative impacts during the operation phase for the first 7

years after which responsibility will be REREC. This will be done by implementation of the following steps:

- Inspections
- Corrective action
- Reporting

8 CONCLUSIONS AND RECOMMENDATIONS

8.1 CONCLUSIONS

During the preparation of this report for the proposed development, it is observed and established that most of the negative social and environmental impacts can be mitigated and have potentially short term low significant effects. The positive impacts are highly rated and will benefit the community at Kanukurdio and the county at large. The project proponent, the implementing agency and the contractor must adhere to prudent implementation of the social and environmental management and monitoring plan. The contractor should commit to obtaining all necessary permits and licenses from the relevant authorities and have qualified and adequate personnel to do the project as proposed. The ESIA has proposed adequate safety and health mitigation measures as part of the relevant statutory requirements.

The analysis of the ESIA has demonstrated that the construction and operation of the proposed Solar Mini-grid will have positive impacts to the government and Kenyan society at large. The impacts will include; Increase in reliable and sustainable clean energy, employment to local community members, increase in the national/local investment, increase in government revenue, improvement of standards of living for Kanukurdio residents. However, despite the outlined positive impacts, the proposed development will cause some negative impacts such as; noise, dust generation, soil erosion, oil spills, fire hazards, electrocution, shocks, solid waste generation, occupational health hazards, social risks such as labor influx, demand for resources, gender-based violence, conflicts, public health impacts (HIV & AIDs, Covid 19) among others that need to be avoided, reduced and mitigated against.

It is the duty of NEMA to consider licensing the project subject to EIA study; in accordance with the Environmental Management and Coordination Act, EMCA of 1999 and its Amendment, 2015 and the Environmental Impact Assessment and Audit Regulations, Legal Notice No. 101 of 2003.

An Environmental and Socio- economic Management Plan (E&SMP) outline has been developed to ensure sustainability of the project area activities from construction through operation to decommissioning. The plan provides a general outlay of the activities, associated impacts, mitigation action plans and appropriate monitorable indicators. Implementation timeframes and responsibilities are defined, and where practicable, the cost estimates for recommended measures are also provided.

A monitoring plan that highlights some of the environmental performance indicators that should be monitored has been developed. Monitoring creates possibilities to call to attention changes and problems in environmental quality. It involves the continuous or periodic review of operational and maintenance activities to determine the effectiveness of recommended mitigation measures. Consequently, trends in environmental degradation or improvement can be established, and previously

unforeseen impacts can be identified, or pre-empted and mitigation measures proposed.

From the findings of this study, the following conclusions are made:

- The proposed project will generate socio-economic benefits which would not be realized if the 'NO development option' is considered.
- The beneficiary community has been consulted among other stakeholders and project information shared including the negative impacts and the views of the stakeholders is that the project is long overdue.
- The potential adverse impacts associated with the proposed project are possible to mitigate successfully. The impacts before implementation of mitigation measures are assessed as very low to medium low and the ratings are expected to improve further with the implementation of the proposed mitigation measures
- The impacts that will be adverse will be temporary during the construction phase and can be managed to acceptable levels with the implementation of the recommendation of the mitigation measures for the project.
- The project will be designed, constructed, and operated according to the acceptable industry norms and standards. Successful implementation of the proposed ESMMP will ensure environmental sustainability

The proposed project design has integrated mitigation measures with a view to ensuring compliance with all the applicable laws and procedures. The Solar Mini-grid and associated structures will be installed to the required planning/architectural/structural designs and standards. During project implementation, operation and decommissioning stages sustainable environmental management would be ensured; avoiding inadequate use of natural resources, conserving nature sensitively and guaranteeing a respectful and fair treatment of all people working on the project, general public at the vicinity and the expected PAPs of the project.

In relation to the proposed mitigation measures that will be incorporated during construction, operational and decommissioning phases; the development's input to the society and environment; the project is considered beneficial and important.

8.2 RECOMMENDATIONS

It is strongly recommended that a concerted effort is made by the implementing agency in particular, to implement the Environmental Social Management and Monitoring Plan provided herein. Following the commissioning of the project, statutory Environmental and Safety Audits shall be carried out in compliance with the national legal requirements, and the environmental performance of the site operations should be evaluated against the recommended measures and targets laid out in this report.

Recommendations

- The REREC and the contractor must adhere to relevant legal and regulatory framework to ensure compliance and success of the project

- Adherence to the mitigation measures as spelt out in the ESMMP and monitoring of the same is mandatory to ensure environmental and social sustainability of the project.
- Cultivate and maintain a good working relationship with the community members
- Ensure social inclusion of the vulnerable groups by paying attention to the most vulnerable and provide ready boards as spelt out
- Contractor to plant trees in construction phase to promote environmental sustainability
- Stakeholder engagement to be carried out throughout the construction and operation and decommissioning phases.
- Contractor to ensure grievance redress mechanism is established and operational
- Environmental Audits should be carried annually or as prescribed by the Authority during the operational phase and invitation of Inspectors and Experts from NEMA to ascertain compliance with the provided ESMMP and set NEMA regulations and Standards.
- Diligence on the part of the contractor and proper supervision by the REREC is crucial for mitigating the potential impacts and ensuring structural strength, safety, and efficient operation of the project.

Authorization Opinion

In terms of NEMA requirement the environmental practitioner is required to provide an opinion as to whether the activity should or should not be authorized. The expert is reticent to venture such an opinion since we are not an elected entity mandated to make decisions on behalf of authority. Nevertheless, in this section a qualified opinion is ventured and in this regard the Lead expert believes that sufficient information is available for NEMA to take a decision. The fundamental decision is whether to allow development which brings socio-economic advantages and is consistent with planning and certain development and social responsibility and upliftment of policies, but which may impact on an area as a result of negative impacts identified. The Lead Expert believes that the ESIA have shown that the applicant's preferred alternative and technological alternatives are generally acceptable. The ESIA has also assisted in the identification of essential mitigation measures that will mitigate the impacts associated with the project to within acceptable limits.

In conclusion, the expert is of the opinion that on purely 'environmental' grounds (i.e., the project's potential socio-economic and biophysical implications) the application as it is currently articulated in the applicant's proposal should be approved provided the essential mitigation measures are implemented. It is in the opinion of the Environmental Consultant that the anticipated negative impacts can be readily and effectively mitigated and the proposed project does not pose any significant threat to the Environment and may be licensed to proceed.

9 REFERENCES

The following list of references was referred to in preparing this Project Report:

1. Environmental Assessment Source Book, 1999 (World Bank),
2. George, C. and Lee, N., 2000 Environmental Assessment in Developing and Transitional Countries, Willey: Chichester, UK
3. Government of Kenya (GoK), 1999. The Environmental Management and Co-ordination Act, 1999. Government Printer.
4. Government of Kenya (GoK), 2003. The Environmental (Impact Assessment and Audit) Regulations, 2003.
5. Government of Kenya (GoK), 2009. The Environmental Management and Co-ordination Act, Regulations 2009, Legal Notice No. 61, 2009. Government Printer
6. Government of Kenya (GoK). The Public Health Act Chapter 242 Laws of Kenya.
7. Government of Kenya (GoK), 2002. The Water Act 2016. Government Printer, Nairobi, Kenya.
8. Government of Kenya (GoK), Building code, Building order 1968 and Grade 11 Building Order 1968
9. Government of Kenya: The Physical Planning Act 2019
10. Government of Kenya: Occupational Safety and Health Act, 2007
11. Government of Kenya: Factories and Other Places of Work (Safety and Health Committee) Rules 2004
12. Government of Kenya: Water Quality Regulations, 2006
13. Government of Kenya: Waste Management Regulations, 2006
14. Government of Kenya: The Occupational Safety and Health Act, 2007
15. Government of Kenya: Noise Prevention and Control Rules 2005
16. Government of Kenya: Hazardous Substances Rules, 2007
17. Government of Kenya: Factories and Other Places of Work (Noise Prevention and Control) Rules 2005
18. British Standard (BS) 5228 Part 4, 1997: Noise Control on Construction and Open Sites: Code of Practice for Noise and Vibration Control applicable to piling operations
19. International Labor Organization 1983: Encyclopedia of Occupational Health and Safety Vol. II, Geneva.
20. Sombroek WG, Braun HMH & Van der Pouw BJA, 1982: Exploratory Soil Map and Agro-climatic Zone Map of Kenya, 1980 (Kenya Soil Survey, Nairobi),
21. Community Land Act, 2016
22. The Land Registration Act, 2012
23. The Land Act, 2012
24. The Energy Act, 2019
25. The Constitution of Kenya, 2010
26. Turkana County Integrated Development Plan 2018-2022

10 APPENDICES

No	Appendix	Item
1	Appendix 1	List of attendance
2	Appendix 2	Minutes of EIA consultation meetings (EIA)
3	Appendix 3	FGDs list of attendance
4	Appendix 4	land identification process minute
5	Appendix 5	Firm and Lead expert EIA practising licences
6	Appendix 6	A-RAP DOCUMENT

10.1 APPENDIX 1 – PUBLIC MEETING PARTICIPANTS' LIST

10.1.1 Baraza List of Participation



Ministry of Energy and Petroleum



Baraza



Kenya Energy

ENVIRONMENTAL IMPACT ASSESSMENT PROJECT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES

Venue: Kanykurudio

Date: 26/01/2024

Time: 2:30 PM

List of Participants

#	Name	Position/Institution/Business/Location	Gender M/F	Phone No. or ID No.	Signature
1.	NADIMA EKARUMEN	Kanykurudio	F	074811976	NE
2.	IPUA EBOKOR	Kanykurudio	F	0704019364	NE
3.	LOKIANI EBOKOR	Kanykurudio	F	0798387287	NE
4.	EBEI LOPEYOK	Kanykurudio	F	0798113822	EL
5.	LELINA NGITIRA	Kanykurudio	F	0790635023	NE
6.	AKUALE NANA	Kanykurudio	F	0743737652	NE
7.	ASENEMA EYOLE	Kanykurudio	F	0745827350	NE
8.	LOBULON APOO	Kanykurudio	F	012531701	NE
9.	ACHOMYO AYANAE	Kanykurudio	F	0713824790	NE
10.	DORCAI LOTEM	Kanykurudio	F	0113340686	D.L
11.	LOCHAAW ENMUNAN	Kanykurudio	F	0703856375	NE
12.	ATABO ENMUNAN	Kanykurudio	F	0745587315	NE
13.	ATIIR KAKOBONG	Kanykurudio	F	0795587250	NE
14.	AYANAE EBEI	Kanykurudio	F	0795547640	NE



Norken International Ltd
Incorporated in Kenya



CENTRIC AFRICA



Ministry of Energy and Petroleum



ENVIRONMENTAL IMPACT ASSESSMENT PROJECT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES

Venue: KAKUUKURU BID

Date: 20/12/2022

Time: _____

List of Participants

#	Name	Position/Institution/Business/ Location	Gender M/F	Phone No. or ID No.	Signature
1.	ETOOT IMNA EKUNUM	KARIS/KAKUUKURU	M	0746019744	ET
2.	EDOME LOHIEL	KARIS LOCATION	F	0112395229	ELM
3.	NGIRESI EKIMATE	KARIS LOCATION	F	0745586245	NE
4.	NGISEKONA KEADA	KARIS LOCATION	M	0748324226	NE
5.	LOUKON NABEYO	KARIS LOCATION	M	0708126736	LOUKON
6.	KUNALANADOME NAKINYAMUN	KARIS LOCATION	M	0700256046	LAAL
7.	NAMUGIAL LOMUOL	KARIS LOCATION	M	0729158424	NAMUGIAL
8.	NATELO EBOKOR	KARIS LOCATION	M	0716284435	NE-EBOKOR
9.	LOKHALE ESIMYEN	KARIS LOCATION	N	0790987297	LOKHALE
10.					
11.					
12.					
13.					
14.					





Ministry of Energy and Petroleum


ENVIRONMENTAL IMPACT ASSESSMENT PROJECT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES

Venue: KANUKEB

Date: 20/01/2022 Time: 7:30 PM

List of Participants

#	Name	Position/Institution/Business/ Location	Gender M/F	Phone No. or ID No.	Signature
1.	LORENZO LOTURANO		F	0757395912	
2.	NASUR NAMUKUL		F	0743346413	
3.	NAREGAE LOBEKI		F	012167585	
4.	ENESIT NICHORIN		F	0746823484	
5.	EKAH NANGOLE		F	0746386070	
6.	PAULINA PETER		F	0769752177	
7.	EKAL LOKHANI		F	0791535846	
8.	GLADYS EKARU		F	0716682783	
9.	LOKOP EMMANUEL		F	0112440329	
10.	LOKOP EMMANUEL		F	0707830332	
11.	JECINTA ASEMUN		F	075398348	
12.	ANOI TAANA		F		
13.	BETTY ENURIA		F	0112487423	
14.	SELINA NAMUKYUS		F	079587520	





Ministry of Energy and Petroleum

Barasa
GIREC



ENVIRONMENTAL IMPACT ASSESSMENT PROJECT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES


Venue: KANUKU AUDIO

Date: 30/01/2022

Time: 3:00 PM

List of Participants


#	Name	Position/Institution/Business/ Location	Gender M/F	Phone No. or ID No.	Signature
1.	MARGRET EKARAN	ELDER - KANUKU AUDIO	F	0741181696	<i>[Signature]</i>
2.	EKUNOM EMOJA	ELDER - KANUKU AUDIO	F	07577446121	<i>[Signature]</i>
3.	LOGIEL LORUKON	"	F	0114615842	<i>[Signature]</i>
4.	MARY AKIRU	"	F	0795547861	<i>[Signature]</i>
5.	PAULINA KOOLI	"	F	0795588973	<i>[Signature]</i>
6.	JECINTA AKALE	"	F	0112715869	<i>[Signature]</i>
7.	ECHANNA NANGOL	"	F	0741240321	<i>[Signature]</i>
8.	IMDARU LOJEM	"	F	0757604395	<i>[Signature]</i>
9.	LOJEM LOBEKI	"	F	0740223910	<i>[Signature]</i>
10.	ATOOT NANGOLE	"	F	0797892011	<i>[Signature]</i>
11.	EKAN NAMORUPUTH	"	F	0794041421	<i>[Signature]</i>
12.	AKARETE NYA AMOTONIGA	"	F	0748448497	<i>[Signature]</i>
13.	AKALE EDEYON	"	F	0748716944	<i>[Signature]</i>
14.	AYANDE LOJEM	"	F	0795590711	<i>[Signature]</i>



Twilio

Bam26.

Time: 14:12-16:30


 Ministry of Energy and Petroleum
PEREC


ENVIRONMENTAL IMPACT ASSESSMENT PROJECT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES


Venue: Ilkumburud

Date: 06/10/2024

List of Participants FCO MEA ILKUMBURUD

#	Name	Position/Institution/Business/Location	Gender M/F	Phone No. or ID No.	Signature
1.	PATRIC EDAPAL	Elder - Ilkumburud	M	0713716668	<i>[Signature]</i>
2.	ALEX KURATO	Elder - Ilkumburud	M	0795587354	<i>[Signature]</i>
3.	MICHAEL MUYEN	Elder - Ilkumburud	M	070726406	<i>[Signature]</i>
4.	CHRISTOPHER AKULA	Elder - Ilkumburud	M	0718348889	<i>[Signature]</i>
5.	LOREN LOBUN	Elder - Ilkumburud	M	0706074869	<i>[Signature]</i>
6.	NABODE LORUKA	Elder - Ilkumburud	M	01486684	<i>[Signature]</i>
7.	APPO LOBUNO	Elder - Ilkumburud	M	4796788	<i>[Signature]</i>
8.	PERON AKKUBI	Elder - Ilkumburud	M	4779291	<i>[Signature]</i>
9.	AWBI MUYA	Elder - Ilkumburud	M	0610591	<i>[Signature]</i>
10.	LUCAS LOPOYO	Elder - Ilkumburud	M	0769866217	<i>[Signature]</i>
11.	LOPEYOK EBOKE	Elder - Ilkumburud	M	0715247296	<i>[Signature]</i>
12.	LOBUN LOKARLE	Elder - Ilkumburud	M	25265405	<i>[Signature]</i>
13.	IKONE TOKUAWI	Assistant Chief - Ilkumburud	M	0714254259	<i>[Signature]</i>
14.	KAGENE ACHWA	Elder - Ilkumburud	M	0792553800	<i>[Signature]</i>



 Norken International Ltd
 PROJECT AND CONSULTING

 CENTRIC AFRICA
 IT BOX LIGHTING
 AFRICAN SUBSIDIARY

19/10/24
 14:12
 16:30

10.2 APPENDIX 2 – ESIA MINUTES AND THE LIST OF PARTICIPANTS

10.2.1 Minutes of the Consultation meeting held during the ESIA



RURAL ELECTRIFICATION & RENEWABLE ENERGY CORPORATION

MINUTES OF EIA CONSULTATION FOR THE PROPOSED KENYA SOLAR MINIGRID PROJECT IN TURKANA COUNTY

Date: 20/01/2022	Time: 3:00 pm
Venue: KANUKURUDID	

PRESENT

lists attached

AGENDA

1. Introduction
2. Opening Remarks
3. Remarks by the consultant
4. Concerns/Issues from participants
5. Responses to the issues raised
6. Acceptance/rejection of the proposed project
7. Adjournment

Item No	Description	Action by
Min 1/22	Introduction	
	<p>The meeting started at 3:00pm with a word of Prayer from a village elder.</p> <p>Mr. Hassan the area chief introduced the village elders & KOSAP team and welcomed everyone to the meeting.</p>	✓



Ministry of Energy and Petroleum



Min 2/22	Opening Remarks	
	<p>Mr. Ewai the CEO, explained the KOSAP Project & the components. He stated that, KOSAP is funded by World Bank & implemented by the Ministry of Energy, Kenya Power & REREC. The members were informed of the methods of compensation (compensation-in-kind) whereby the members were to choose their prioritized community project from those projects; Health, water and education.</p>	
Min 3/22	Remarks by the consultant	
	<p>Mr. Alan Owino described the benefit of KOSAP project such as employment opportunities, reduced indoor air pollution, supply of reliable electricity, enhanced utilization of green energy; clean lighting, improved access of water etc. He also described the processes involved in ESIA such as identification of potential impacts & benefits, stakeholder engagement & public consultation etc.</p> <p>The consultant also discussed the anticipated social impacts of KOSAP such as child labour, labour influx, ELRA capture, impacts on cultural heritage, Risks of insecurity incidents etc.</p> <p>Mr. Lydon discussed the environmental impacts of KOSAP such as the environmental exposure to hazardous & toxic materials, operation</p>	

Page 2 of 6





Ministry of Energy and Petroleum



	<p>of standby generators & heavy Machinery, occupational Health & Safety Risks, impacts on air, soil & water quality, visual intrusions etc.</p> <p>The consultants discussed the mitigation measures to the anticipated impacts such as vegetation replanting to offset cleared vegetation, the use of personal protective equipment, implementation of specific interventions for the vulnerable to have equal access to project benefits & opportunities.</p>	
Min 4/22	Concerns / Issues/Recommendations from participants	
	<p>Philip was concerned on the safety of the workers during operation phase. He was concerned on whether the contractor will provide insurance (medical cover) for the workers in case of emergencies.</p> <p>Miriam Dibeoch was concerned on whether women and youth in Kanukardio will be considered for employment. She requested the contractor to practice equality in the payment/wages.</p> <p>Mr. Lukano was very appreciative to the government and the World Bank as he requested equal job opportunities for people living with HIV/AIDS and TB.</p>	

Page 3 of 6





Ministry of Energy and Petroleum



	<p>Mr. Ashim Loyenne was concerned on the types of employment that will be available.</p> <p>Mr. Nsindima was concerned on the methods of disposing wastes generated at the site, that the contractor will adopt.</p>	
Min 5/22	Responses to concerns/issues raised	
	<p>The consultants responded to the issues / concerns of the members.</p> <p>It was said that;</p> <p>All workers at the site will be provided with work Injury Benefit Act (WIBA) insurance cover for medical expenses in case of</p>	

Page 4 of 6





Ministry of Energy and Petroleum



	<p>any accidents experienced at the site. The project encourages the participation and empowerment of the community. There is regardless of gender & age, both skilled and non-skilled based opportunities will be available.</p> <p>The contractor will ensure routinely disposal of hazardous waste through NEMA approved waste handlers are records are properly documented. He/she will also ensure waste containers are properly labelled and stored onsite provided with impervious surface, shed & secondary containment system. He/she will also ensure the workers have access to toilets/shrine within the site.</p>	
--	--	--





Ministry of Energy and Petroleum



Min 6/22	Acceptance/Rejection of the project	
	All members unanimously accepted the project. All members agreed on a water project (i.e. equipping the community borehole with larger metallic water tanks) as their first priority (compensation-in-kind).	
Min 7/22	Adjournment	
	The meeting adjourned at 4:45 pm with a word of prayer from a villager.	

Minutes Prepared By:
 Name: Muhammad A. Adhi Date: 30/01/2022
 Position: ESIA Expert Signature: [Signature]

Minutes Confirmed By:
 Name: Hassan Lukhwaya Date: 30/01/2022
 Position: Survey Chief Signature: [Signature]

APPENDIX 3 – Focus Group Discussion Participants Lists During Thhe ESIA

10.2.2 Men FGD



Ministry of Energy and Petroleum



Male FGD



ENVIRONMENTAL IMPACT ASSESSMENT PROJECT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES

Venue: Karuri Kijibondo

Date: 20/01/2023 Time: 3:00 pm

List of Participants

#	Name	Position/Institution/Business/Location	Gender M/F	Phone No. or ID No.	Signature
1.	Ekelony Lotoko	Elder - Kamukundu	M	0757018386	<i>[Signature]</i>
2.	Elin Muka	Elder - Kamukundu	M	0714958990	<i>[Signature]</i>
3.	Ewori Esinwen	Elder - Kamukundu	M	0795529418	<i>[Signature]</i>
4.	Lobeyo Ebokor	Elder - Kamukundu	M	21418322	<i>[Signature]</i>
5.	Eka Aporu	Elder - Kamukundu	M	34511160	<i>[Signature]</i>
6.	Aurien Losike	Elder - Kamukundu	M	0742917384	<i>[Signature]</i>
7.	Lowbet Enamman	Elder - Kamukundu	M	0740833390	<i>[Signature]</i>
8.	Erene Ebokor	Elder - Kamukundu	M	0703716476	<i>[Signature]</i>
9.	John Ekak	Elder - Kamukundu	M	982854	<i>[Signature]</i>
10.	Ebel Carlmax	Elder - Kamukundu	M	0795586693	<i>[Signature]</i>
11.	Aleuy Loweto	Elder - Kamukundu	M	0738341	<i>[Signature]</i>
12.	Kaikobang Looyakel	Elder - Kamukundu	M	0238917	<i>[Signature]</i>
13.	Chane Ekapor	Elder - Kamukundu	M	0745604444	<i>[Signature]</i>
14.	Lotelei Lotanue	Elder - Kamukundu	M	0791691130	<i>[Signature]</i>



Norken International Ltd
Consultants and Environmental Impact Ltd



BOX 1
LIMITING
CENTRIC AFRICA
Private Limited



Ministry of Energy and Petroleum

MALE FED
REDEC



ENVIRONMENTAL IMPACT ASSESSMENT PROJECT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES

Venue: Ngũgĩ Road

Date: 30/01/2022


Time: 8:30 AM

List of Participants

#	Name	Position/Institution/Business/ Location	Gender M/F	Phone No. or ID No.	Signature
1.	LOKOL LOBOR	Elder - Kanukunda	M	079885259	LL
2.	ELDER NAPOO	Elder - Kanukunda	M	53090218	NA
3.	EWDI EKOEL	Elder - Kanukunda	M	0798173108	EKO
4.	MUKADU BOKAN	Elder - Kanukunda	M	32854200	MB
5.	JOSEPH EKAI	Elder - Kanukunda	M	0790498367	JE
6.	EMANMAN EBOKE	Elder - Kanukunda	M	4800649	EE
7.	XAMORO ROTH LOKENDE	Elder - Kanukunda	M	21318295	XL
8.	NANIGAL MUYA	Elder - Kanukunda	M	0718827448	NM
9.	SIMON EKAI	Elder - Kanukunda	M	074548695	SE
10.	LOBON ADEPER	Elder - Kanukunda	M	0769184533	LA
11.	LOPURA EKALE	Elder - Kanukunda	M	0700100581	LE
12.					
13.					
14.					




10.2.3 FEMALE FGD




 Ministry of Energy and Petroleum
ENVIRONMENTAL IMPACT ASSESSMENT PROJECT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES

Venue: Karakuri
 Date: 28/03/2024
 Time: 3:00 p.m.


Womaa FGD


List of Participants

#	Name	Position/Institution/Business/ Location	Gender M/F	Phone No. or ID No.	Signature
1.	LOBENYO EJEAN TOKO	KAKAKURDIO	F	25265398	<i>[Signature]</i>
2.	ICHOR LOBUIN	KAKAKURDIO	F	011497857	<i>[Signature]</i>
3.	ADAPAL LOGIEL	KAKAKURDIO	F	0793903285	<i>[Signature]</i>
4.	EYANGAN LOBUIN	"	F	0758637972	<i>[Signature]</i>
5.	ESEI ELIMLIN	"	F	070110016224	<i>[Signature]</i>
6.	AKALACE LORUMSEK	"	F	0757390489	<i>[Signature]</i>
7.	ATOKON RYANMAN	"	F	0795589254	<i>[Signature]</i>
8.	ENOI LOURE	"	F	"	<i>[Signature]</i>
9.	ECHNAP EDUKAN	"	F	0113156851	<i>[Signature]</i>
10.	AJEKON EDAPAL	"	F	0112715869	<i>[Signature]</i>
11.	ESTHER KALALE	"	F	0740302309	<i>[Signature]</i>
12.	AKITELA KOTOME	"	F	0740319296	<i>[Signature]</i>
13.	KAPUA ERUPE	"	F	0701784876	<i>[Signature]</i>
14.	NANGOR LOKOYO	"	F	0748081259	<i>[Signature]</i>



 Norken International Ltd
 IMPROVING THE STANDARD OF LIVING



 CENTRIC AFRICA

FEMALE FGD



Ministry of Energy and Petroleum



ENVIRONMENTAL IMPACT ASSESSMENT PROJECT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES

Venue: Kariakou Camp

Date: 08/01/2022




Time: 2.00 PM

List of Participants

#	Name	Position/Institution/Business/ Location	Gender M/F	Phone No. or ID No.	Signature
1.	Lucy ALOH	KARELS LOCATION	F	0902256072	<i>[Signature]</i>
2.	MARGARET WAKURU	KARELS LOCATION	F	0778696844	<i>[Signature]</i>
3.	RUTH NDIKHI	KARELS LOCATION	F	0716760671	<i>[Signature]</i>
4.	JENNIFER OROBO	KARELS LOCATION	F	0706835629	<i>[Signature]</i>
5.	NAKUDU MERLEY	KARELS LOCATION	F	07798465235	<i>[Signature]</i>
6.	ASANTEN COMPE	KARELS LOCATION	F	0708716476	<i>[Signature]</i>
7.	NAMUNAKHEU ABETI	KARELS LOCATION	F	0729581013	<i>[Signature]</i>
8.	ESTHER TUJO	KARELS LOCATION	F	0729581013	<i>[Signature]</i>
9.	SUSAN EUNTELA	KARELS LOCATION	F	0720572952	<i>[Signature]</i>
10.	ATASO GRAMATI	KARELS LOCATION	F	0702462385	<i>[Signature]</i>
11.	AKIOU ADOTIO AMDELI	KARELS LOCATION	F	0703338907	<i>[Signature]</i>
12.	MELORIE AMNEU	KARELS LOCATION	F	0755081760	<i>[Signature]</i>
13.	NAKOT ONIEU	KARELS LOCATION	F	07160854229	<i>[Signature]</i>
14.	AKINBOLO LOKAMOR	KARELS LOCATION	F	0704471096	<i>[Signature]</i>

















10.2.4 YOUTH FGD







Ministry of Energy and Petroleum
 ENVIRONMENTAL IMPACT ASSESSMENT PROJECT FOR THE PROPOSED KENYA OFF-GRID SOLAR ACCESS PROJECT (KOSAP) FOR UNDERSERVED COUNTIES
 Venue: KENYA POWER CHIEF OFFICE
 Date: 20TH JAN 2022
 Time: 2:15 PM

Youth FGD

List of Participants

#	Name	Position/Institution/Business/ Location	Gender M/F	Phone No. or ID No.	Signature
1.	PHILIP LOMUGAL	KAEUS	M	0717206930	
2.	FRANKIE LOGIEL	KAEUS	M	0711552917	
3.	NASHAKA KEMME	KAEUS	M	076414602	
4.	MUYA LONRAN	KAEUS	M	0799094175	
5.	LOKUND EBERIO	KAEUS	M	0704210069	
6.	ELIM LIM ESEKON	KAEUS	M	07112877336	
7.	ANXU LOTAMAE	KAEUS	M	0798249892	
8.	ENOI EBERION	KAEUS	M	078204290	
9.	EGETE LODITE	KAEUS	M	0758942485	
10.	NABKOTO LOGIEL	KAEUS	M	0797384532	
11.	PHILIP ETABO	KAEUS	M	072706862	
12.	ELIM ANGEOM	KAEUS	M	0700421194	
13.	DIGORAH NARSIRE	KAEUS	F	0705453616	
14.	ESINYEN LOBUN	KAEUS	M	011855724	

NORKEN INTERNATIONAL LTD
 POWER AND WATER SOLUTIONS
 BOX 1
 LONTANGE,
 KENYA 00100

CENTRIC AFRICA

10.3 APPENDIX 4 – Minutes Of The Consultative Meeting Held During Land Identification

MINUTES OF COMMUNITY CONSULTATION MEETING

Minutes of the community consultation meeting held on 19/03/2021 at Kanakurdio Village starting 10.57am

AGENDA

- Public forum: Welcoming and opening remarks
- Project information: KOSAP and the Kanakurdio mini grid
- Project Land requirements: Disclosure of community rights and entitlements to compensation, the options and implications)
- Project Technical Description, Wiring, Connection and Payments
- Potential environmental and social risks and impacts: positive and negative impacts and project opportunities.
- Grievance Redress Committee
- Focus Group Discussions: Men, Women and Youth.
- Review of feedback from FGDs by all community members.

In attendance (refer to annexed list of participants)

MIN 1.0 WELCOMING AND OPENING

Ward Administrator Alfred Nangole - Visitors have good news for the community in terms of matters of development. Area has numerous challenges – drought/ famine/ health, education. The project intends to install a mini grid- they require land for the project. Land belongs to community but is held in trust by the county government. They will tell us why they are visiting us. Lets hear what they tell us and as us questions.

The visiting team introduced themselves as following;

- | | | |
|--------------------|---------------------------------|-----------------|
| 1. Kioko Maithya | - Social Safeguards Officer | - REREC |
| 2. Irene Kawira | - Senior Environmentalist | - REREC |
| 3. Caleb Ewoi | - CREO | - CREO |
| 4. Agnes Gachoki | - Senior Surveyor | - REREC |
| 5. Lawrence Lorika | - Technician | - KPLC (Iodwar) |
| 6. Myra Mukulu | - Technical Advisor Cook Stoves | - MOE |

2.0 KOSAP AND KANAKURDIO MINI GRID

Ms Myra Mukulu informed the participants that the proposed project is part the Kenya off Grid Solar Access Project (KOSAP) which is funded by the World Bank and is being implemented by the Ministry of Energy, the Kenya Power and Lighting Company (KPLC) and the Rural Electrification and Renewable Energy Corporation (REREC). MoE will provide overall coordination of the Project including responsibility for safeguards due diligence, and compliance monitoring. REREC will implement the mini grid and will be responsible for the implementation of Resettlement Framework Plan, Environmental Social Management Framework and Social Assessment. She said the Government is committed to providing electricity to communities that have not been served by the

national grid such as Kanakurdio because it recognises energy as key to advancing development.

She said KOSAP entails the following components;

1. Provision of electricity through solar mini grids to households, enterprises and community facilities,
2. Provision of energy services through solar home systems for and clean cooking technologies for households
3. Provision of solar power to electrify boreholes as well as to power community facilities
4. Community engagement and education as well as capacity building and institutional support for the national and county Governments

She further, said KOSAP is being implemented in 14 counties. In Turkana County 23 minigrid sites, 98 stand-alone solar facilities (public facilities) and 38 boreholes (solarisation) had been identified. One of these minigrid sites is Kanakurdio.

She noted that the agenda of the visit was to; undertake an environmental and social screening of the proposed project site, to sensitize the community on the project land requirements and community rights and entitlements, explain the Project Technical Description and connection requirements, discuss potential environmental/social risks and impacts and mitigation and sensitize members on grievance redress mechanism.

3.0 PROJECT LAND REQUIREMENTS: RIGHTS AND ENTITLEMENTS OPTIONS AND IMPLICATIONS

The Surveyor, Ms. Agnes Gachoki told the Baraza that the main purpose of the Baraza was to seek community consent for land donation for the project. Land required for the construction of the Mini grid is 1.272 ha. Land in Kanakurdio, falls under the Community land category. It is yet to be registered, has no title but is jointly owned by the community. Its use and management is governed by the Community Land Act 2016.

She explained the various forms of acquiring interest in land including; allocation, land adjudication process, compulsory acquisition, settlement programs, transfers, donation and long-term leases. The Surveyor informed the meeting that if they opted to consent to donation of the project land following VLD criteria has to be met;

VLD criteria

1	The infrastructure must not be site specific.
2	The impacts must be minor, that is, involve no more than 10 percent of the area and require no physical relocation.
3	The land required to meet technical project criteria must be identified by the affected community, not by line agencies or project authorities
4	The land in question must be free of squatters, encroachers, or other claims or encumbrances.
5	Verification (for example, notarized or witnessed statements) of the voluntary nature of land donations must be obtained from each person donating land.
6	If any loss of income or physical displacement is envisaged, verification of voluntary acceptance of community-devised mitigatory measures must be obtained from those expected to be adversely affected.
7	If community services are to be provided under the project, land title must be vested in the community, or appropriate guarantees of public access to services must be given by the private titleholder.
8	Establishment of Grievance mechanisms

Agnes also told the community on their rights and entitlements to the following;

1. They can refuse to donate the land.
2. They can opt to seek compensation for the project land.
3. They can refuse or accept the project.
4. The right to resettlement assistance in addition to compensation for affected assets, where the more vulnerable individuals/households have been identified among them.
5. The right to livelihood restoration measures where the project has impacted their livelihood strategies, if they choose compensation.

The surveyor further informed the meeting that there were several options on land compensation;

- a) Payment of cash for the land that has been identified for the project. For this to take place the land is has to be valued first. All monies payable as compensation for acquisition unregistered community land are then held in trust by the county government. Any such monies shall be deposited in a special interest earning account by the County Government and shall be released to the community upon registration of the community land.
- b) Compensation of land for land. The community would identify a similar piece of land in value to the project site and request that the same is purchased for the community.
- c) A further option is compensation in kind. This option is for the community to grant land for the project and request for compensation in kind. This could be in the form of a project for the benefit of the community like the construction of classrooms or a borehole. This is the most preferred option.

She said the surveyor will need to pick exact GPS points of the land proposed for the project and with community consent the land will be registered in the name of the implementing agency. The surveyor encouraged the community to make an informed decision that collectively involved every member of the community the elders, men, women, the marginalised and PLWDs. Any land donation would have to be signed by at least five representatives nominated by the community. She disclosed to the meeting what the term advance possession on land issues meant and requested them to consider allowing the implementing agency to take possession of the parcel and commence construction of the project even as the land transfer process is going on.

4.0 PROJECT TECHNICAL DESCRIPTION, WIRING, CONNECTION AND PAYMENTS

Mr. Lawrence Lorika from KPLC told the meeting the proposed mini grid will comprise a solar system and a thermal unit (generator). The Mini-grid will have a capacity of 31KVA and PV 104kwp). He said based on an aerial survey done on 2019, Kanakurdio has a potential customers base of approximately 448 households and 12 non-residential users. These customers are mapped for connection. Energy meters will be installed by KPLC staff and the locals living within the required 3 km radius would be connected to power. He said to be connected one will be required to pay a one-off connection fee of Kshs.1000 as opposed to other places like Lodwar, Kitale and other big towns whereby they pay Kshs.15000 or more.

Power would not be for free, and residents will be buying tokens to facilitate their needs as far electricity is concerned. Tokens can be purchased in amounts of Kshs 50 and above. Purchase is done through a vendor or directly purchasing and paying through the mobile money platforms. The token purchased through this 'Pay As You Go' (PAYG) mechanism, will last according to the individual power usage. If you have more load for example ceiling fans and air conditioners in your shop, it will last for short period of time.

He told the Baraza that power distribution will involve passing of electrical lines along the roads in order to reach their houses, business premises and public facilities and requested the community grant way leave consent.

He said the project land where the powerhouse comprising solar panels, diesel generator, batteries and inverters will be installed will be fenced off as a safety measure and access will thus be restricted to people and animals. The minigrid system would be operating throughout the day and night. In case of overload, cloudy day or low battery, the generator will automatically kick in to supply power.

MIN 5.0 SOCIAL AND ENVIRONMENTAL ISSUES

The Environmental specialist Ms Irene Kawira Mate said that there were many benefits that would accrue to residents due to the supply of power to the area. She cited some of them as:

Potential positive impacts:

1. Improved educational standards as a result of longer study hours for learners.
2. Enhanced health care as Clinics/dispensaries can operate at night and store perishable drugs and vaccines
3. Employment of locals during the construction phase
4. Increased information access and entertainment (TV, Radio, Internet phones and computers).
5. refrigeration of food products like meat and milk thereby increasing their shelf life
6. Opportunity for locals to establish business ventures like hairdressing, photocopy and welding.

Potential negative impacts:

1. The land that is currently in use for grazing will now no longer be accessible to the residents as it would be fenced off.
2. The risk of electrocution due to lack of proper handling and care. The Contractor shall however educate the community on safety precautions.
3. Labour influx leading to sexual exploitation and harassment.

4. Environmental contamination may arise due to disposal of used batteries, inverters and other materials.

5. Increase in cases of Gender Based Violence and sexual harassment of workers. She affirmed that the project PAPs were the Yapakunur Clan, a major sub-tribe of the Turkana language group who are Indigenous people and are the only VMG residing near the sub-project area thus the sole project beneficiary. Construction of the mini grid could restrict the access of VMGs to grazing land thus affecting availability of pasture, and consequently their main source of livelihoods, and forcing families to relocate grazing activities elsewhere. Consequently, a VMGP may not be required. The project can include specific interventions in the final ESMP to ensure the community has access to culturally appropriate benefits. The project will strive to minimize adverse impacts on the indigenous people and ensure that they fully and continuously participate in the consultation process and receive culturally appropriate benefits from construction of the mini grid. The ESIA study would be conducted before the onset of the project and an ESMP developed outlining viable mitigation measures.

Screening would be undertaken to ensure that the project is designed and implemented in an environmentally and socially sustainable manner, taking into account Kenya's relevant sector legislation as well as World Bank Safeguard Policies. This would be undertaken using screening checklists in reference to requirements of the Environmental Management and Coordination Act, 1999 (amended 2019) and KOSAP-Environmental and Social Management Framework (ESMF). The screening process would consider potential impacts of the project and propose viable mitigation measures. She assured the community that temporary or minor impacts which are foreseen during project implementation will be sufficiently mitigated.

6.0 GRIEVANCE RESOLUTION COMMITTEE (GRC)

Ms. Mate informed the Baraza on the need for constitution of a locational Grievance Resolution Committee (GRC) for purposes of resolving any grievances that may arise in the lifetime of the project as guided by project frameworks. The local GRC will be the first stop shop for resolution of project related disputes and grievances for project affected persons and interested parties. The GRM should be culturally appropriate, inclusive, accessible and developed in consultation with Kanakuradio community. Grievances which cannot be resolved by the local GRC shall be escalated to the sub-county GRC and the National GRC respectively. Any unresolved matter can then be referred for arbitration or to a court of law. World Bank's GRS is also available to stakeholders to lodge their grievances. The GRC should constitute representation from all genders, youth and vulnerable persons. It should be structured in such a way that it provides multiple channels for lodging grievances, ensure anonymity and confidentiality.

The following details shall be recorded for each grievance reported; and a close-out form issued to indicate the grievance registered has been closed.

- a) Date of complaint
- b) Name of complainant
- c) ID of complainant
- d) Telephone contact of complainant
- e) Nature of complaint

- f) Name of the Person handling the complaint
- g) Contacts of person addressing the complaint
- h) Action taken
- i) Date of conclusion of complaint

Existing indigenous grievance redress mechanism

Conflicts occasionally arise within individuals and families. The Kaaling community like in all other parts of the Turkana society is endowed with elaborate and systematic traditional mechanisms of conflict management. When disputes occur, they are referred elders (*Ng'akasukou*). The elders then summon involved parties and witnesses to the meeting point (*Ekitoe Ng'akasukou*). The elders will listen to the conflicting parties/individuals, weigh adduced evidence and pronounce the verdict accordingly. Any matter that is not resolved or when the parties are not satisfied they can report to the chief or seek discourse in a court of law.

The summary of the comments/remarks from the community in the meeting held at Kanakurdio on 19/03/2021

QUESTION/COMMENTS	ANSWER/REMARKS
--------------------------	-----------------------

QUESTION/COMMENTS	ANSWER/REMARKS
<p>Namujal Lomogol</p> <p>Nimefurahia sana kwa wageni kusikia ile kitu wanaleta sehemu hii ile yenye sijawahi skia tangu nizaliwe . Sisi tukiwa hapa tunakaribishwa miradi yote tumefurahi.</p> <p>Kuna kitu ilikuwa inakuja kama msaada including telecommunication network.</p> <p>Tukauliza kama kuna kitu itakuwa inakuja kwa account ya community kila mwaka saa hii project itakuwa/namna gani?</p> <p>Plot mingi ni za watu or belongs to individuals, so how are you compensating us</p>	<p>This project is not structured to give annual compensation like Safaricom. This is a GOK/World Bank Project; there are legally defined procedures for different types of compensation including cash, in-kind and land for land.</p> <p>Land in Kanakurdio is community land</p>
<p>Elim Muka</p> <p>Nafurahia mukutano ya leo. Sisi Kipande hii tuko na mashida mingi kama shida ya maji – some community members travel up to 15 kilometres to get water – initiate water projects.</p> <p>Q2 – ni kilomita ngapi yenye hii mradi itafikia (coverage)</p>	<p>Community is free to request compensation in form of a water project. We shall forward your request.</p> <p>3 kilometre radius</p>
<p>Lopeyok Epokor</p> <p>Mimi nimeshukuru kwa nyinyi kufika pande hii – tumefurahia kupata hii mradi.</p> <p>QN2 – kuna nyumba mnaeza kututengenezea ili youth ikuwe wanakutania hao kupanga mambo yao?</p>	<p>Project is purely Confined to electricity – but power can be used to promote businesses like haircut, video shows. Community is free to request compensation in whatever form and we will be glad to forward the information to the MoE.</p>

Hassan Lukwewi (Chief) Mimi niko na bibi wawili, hapa iko panya wa kukata kata wire- Nani atakuwa anatengeneza hii stima	Electrical repairs inside the house is a responsibility of the owner
Mary Lobruk Pahome/ Sunking- These are small systems that cant power fridge, iron clothes welding but solar mini-grid can do anything. Hii stima (site) will it be fenced or not to injure children Will women be employed by the project?	Site shall be fenced off Employment is open to everyone
Florence Akiru Token inalipwa na nini- na siku sijalipa si itazimika tu? Haina tofauti na home systems cause both disconnect when you dont pay	Bought using Mpesa
Paul Ngiretun Happy ,stima itatusaidia kwa mambo mingi Install pipes from borehole	Community to decide on form of compensation

7.0 FOCUS GROUP DISCUSSIONS

After the main meeting women, men and youth convened for separate discussions (FGDs) where they could freely express with and among themselves and provide insights (hopes, fears, aspirations and expectations in relation to the mini grid and the land question).

FGD-MEN

The main objective of this discussion was to get gather and document how men thought/felt about the issues discussed during the main meeting including; environmental and social screening of the project site, land requirements and community rights/ entitlements, Project Technical Description and connection requirements, potential environmental/social risks and impacts, mitigation and grievance redress mechanism. The FGD would also provide them an opportunity to air their issues/give their opinions on the project.

Kioko them the FGD was a good avenue for the elders to express their opinions and freely ask any questions they might not have been unable to ask in front of the youth and women, He said that at the end of the FGD discussion the group should come into consensus on issues discussed in the earlier meeting, select a representatives to the GRC. Matters agreed on and selected representatives would then be presented to the main meeting for adoption.

The men said they had understood the project and did not have any further questions. They nominated the following to the GRC

Name	ID number	Telephone number
Elim muka	0610343	0714958990
Awoi muya	0610591	0728168712
Simon akula	7477266	0718343889

FGD-WOMEN

A focus group discussion was held with women. The main objective of this discussion was to gauge whether the women had understood the project and its requirements and to provide them an opportunity to air their issues/give their opinions on the project. Myra explained to the women that it was important to hold a separate discussion with them so that they have opportunity to freely express themselves as this may have not been possible in the Baraza. The women were allowed time to ask questions, give suggestions and or seek clarifications.

From the questions in the group, it was clear that they had not understood the issue. Myra then explained that the meeting was to clarify any issues about the project on environmental and social issues as well as request land donation from the community. She explained further that the Ministry wanted land for was to construct a solar minigrid.

Question, Suggestions, feedback and response for focus group discussion with Women

Name of Person making the contribution (e.g. comment or question)	Question, Comment, Suggestion	Feedback/Responses by project team	Response by agency on how feedback will be used or acted upon
Florence Akiru Lowuoto	We do not have money to pay for the electricity because we do not have businesses in this area. Nevertheless bring the electricity and we will see how to raise funds	Myra responded that this is noted	REREC can structure friendlier payment terms
Mary Ekwom	Can we get jobs in the minigrid project? This will help us pay for the power	Myra responded that the contractors will recruit community members to work in the minigrid project.	REREC to ensure that contractors have a compulsory quota for local employment

Name of Person making the contribution (e.g. comment or question)	Question, Comment, Suggestion	Feedback/Responses by project team	Response by agency on how feedback will be used or acted upon
Mary Akiru	The electricity is good since it will improve security in the area	Myra responded that this is noted	

After the discussions in the FGD for women, Myra requested that they elect 2 women to the GRC

The women nominated were:

Name	ID number	Telephone number
Lucy Aroto	34038002	0723928407
Margaret Nakaru	4777247	0796686224

FGD YOUTH

The youth said they had understood the issue of the minigrid, had no more questions and proceeded to nominate representatives to the GRC

Name	ID number	Telephone number
Florah Nabuin Ejem	25262713	0716760677
Joseph Ekai Nawiyakwan	23028558	0790498367

8.0 REVIEW OF FEEDBACK FROM FGDS BY ALL COMMUNITY MEMBERS

After the FGDS the participants convened back to the main meeting to review the respective resolutions from the FGDS. During the meeting they expressed their support towards the project saying the benefits to the area shall be enormous. They mentioned the opportunity to light their homes, establish income generating business ventures and employment as some of the major benefits.

They resolved to freely donate land for the project, validated the nominees to the GRC and elected officials to lead the identification of project land and sign the land donation form on their behalf.

The community nominated the following as members of the GRC:

No	Name	Design.	1D No.	Mobile No.
1	Elim muka	Men	0610343	0714958990

2	Awoi muya	Men	0610591	0728168712
3	Simon akula	Men	7477266	0718343889
4	Florah Nabuin Ejem	Youth	25262713	0716760677
5	Joseph Ekai Nawiyakwan	Youth	23028558	0790498367
6	Lucy Aroto	34038002	0723928407	Lucy Aroto
7	Margaret Nakaru	4777247	0796686224	Margaret Nakaru

10.4 APPENDIX 5 – THE ABBREVIATED RESETTLEMENT ACTION PLAN (A-RAP)

1. Kanakurdio Sub-project Site

The Kanakurdio sub-project site is on unregistered community land and held in trust by the County Government of Turkana on behalf of the community, in line with the Community Land Act 2016. The proposed site is uninhabited, has no structures, community facilities, or encumbrances, utilized by the community for grazing. Consultations leading to the identification and selection of the sub-project site are captured in the Environmental and Social Screening report for Kanakurdio. *Refer to Chapter 3 of the ESIA for the comprehensive socio-economic profile.*

2. Actual Census Survey of PAPs and Valuation of Affected Assets

The number of project-affected persons (PAPs) is 1500 (approximately 200 households). The land acquisition-related impacts are loss of land and pasture. Mitigation measures include in-kind compensation for loss of land and pasture, and designing power distribution lines to avoid impacting trees, crops, structures, and community facilities. No physical displacement is anticipated; however, there is minimal loss of pasture occasioned by the acquisition of land utilized by the community for grazing. The 1.272 Hectares identified for the sub-project will be acquired compulsorily by the National Land Commission (NLC). The proposed site will be valued and compensated in line with the provisions of the Resettlement Policy Framework (RPF) prepared under KOSAP. *Refer to section 2.2 of the ESIA for the sketch map of the site.*

3. Compensation Measures Agreed with the PAPs and other Resettlement Assistance to be Provided

The proponent requested the community identify three priority projects, whereby one out of the three would be provided as in-kind compensation for loss of land and pasture. The Kanakurdio community requested the project proponent to equip community borehole and pipe of water to community water kiosk as a priority. The value of the priority community project will be proportional to or higher than the value of land under acquisition. In addition, loss or damage to crops, trees, structures, and community facilities will be compensated in line with the provisions of the RPF, and as summarized in the entitlement matrix below.

3.1 Entitlement Matrix

Types of Impact	Person(s) Affected/Eligible for Compensation	Compensation/Entitlement/Benefits	Responsible organization
1. Loss of Land			
Loss of unregistered community land.	Community.	Compensation in-kind as prioritized by the community.	REREC
Loss of land in unregistered group ranches.	Group ranch members.	Compensation in-kind as prioritized by the community.	
Loss of land in registered group ranches.	Group ranch members.	Compensation in-kind as prioritized by the community.	
Loss of land owned by the National Police, county governments and the Ministry of Interior	Government agencies.	No compensation for public land allocated to another government body.	
Loss of land owned by the Kenya Forest Service (KFS) and Kenya Wildlife Service (KWS).	Government agencies.	No compensation for public land allocated to another government body. However, payment of conservation fees to KWS and KFS as stipulated under their respective regulations is foreseen.	
2. Loss of Use on Land			
Loss of use on public land (e.g., grazing, farming etc.).	Communities utilizing public land.	Communities do not own public land; however, they utilize public land with consent from the relevant agencies. The project will implement the infrastructure project prioritized by the community as compensation for the loss of public land use.	REREC
Loss of use on unregistered community land, unregistered group ranches and registered group ranches (e.g., grazing, farming etc.).	Communities utilizing unregistered community land, unregistered group ranches, and registered group ranches.	Compensation in-kind as prioritized by the community.	

3. Loss of /Damage to Assets on Land			
Trees	Community members on unregistered community land; community members utilizing public land; members of registered and unregistered group ranches and government entities.	During detailed design for power distribution lines and construction of the mini grid and community project, any crops, structures, trees, and community facilities shall be avoided to the extent possible. However, loss or damage to the above will be compensated/restored at full replacement cost, ¹ in line with the provisions of the RPF.	REREC
Crops			
Structures			
Community facilities e.g., water sources (earth pans, boreholes etc.).	Community members on unregistered community land, community members utilizing public land, and members of registered and unregistered group ranches.		

4. Consultations with PAPs About Acceptable Compensation Options and Alternatives that have been Considered

Detailed consultations with PAPs on land acquisition and compensation, including the modalities of acquiring land and compensation options, were undertaken during the Environmental and Social Screening, Environmental and Social Impact Assessment, and the NLC land valuation process. The following sections provide a summary of the consultations.

4.1 Engagement of Project -Affected Persons (PAPs)

Local administration and County Renewable Energy Officers (CREOs) supported the proponent and implementing agency (IA) to mobilize community members and other stakeholders for public consultations and engagement activities. National and county government entities, community segments (men, women, youth, elders, persons with disability, vulnerable and marginalized groups, etc.), NGOs, and local leaders were engaged through key informant interviews, community meetings, and focus-group discussions. The proponent and IA implemented appropriate measures to ensure PAPs effectively participated in the consultations. *Refer to Chapter 5 of the ESIA on public consultation and engagement.*

Figure 1: _____

¹ A cost basis that will yield compensation sufficient to replace assets, plus necessary transaction costs associated with asset replacement).

Once the compensation award and Bill of Quantities (BoQs) are known, the Implementing Agency (IA) will engage the community and agree on the community project to be executed as in-kind compensation. During these consultations, the IA and the community will define the roles and responsibilities of the community in monitoring the implementation of in-kind compensation and maintenance once the IA hands it over to the community. Thus, the IA and the community will effect an agreement to be signed by the local leadership; representatives of the Grievance Redress Committees at the locational, county, and national levels; A-RAP Implementation Committee, and Implementing Agencies.

4.2 Identification of Community Representatives

The Kanakurdio Locational Grievance Redress Committee (LGRC), constituting a chairperson, secretary, and three members, was formed through community consensus. The committee's membership comprises men, women, youth, persons with disabilities, and ethnic minorities. The LGRC is responsible for engaging PAPs and resolving complaints. Refer to Chapter 6 of the ESIA on the Grievance Redress Committees. Further, the community will constitute the A-RAP Implementation Committee responsible for coordinating community engagements on the A-RAP and monitoring the implementation and closure of the A-RAP. The representation of the committee will consider gender, vulnerability, and intergenerational sensitivities.

4.3 Summary of Consultations on Land Acquisition and Compensation Options

Date	Objective	Implementing Entities	Land Acquisition and Compensation Aspects Discussed	Key Issues Raised	Responses Given
19 th March, 2021	Environmental and Social Screening. Voluntary land donation (VLD). Constitution of the Locational Grievance Redress Committee (GRC).	Ministry of Energy (MoE) Kenya Power (KPLC) Rural Electrification and Renewable Energy Corporation (REREC)	Site identification and land allocation for the sub-project. Criteria for VLD. Community entitlements (forms of compensation and implications for each).	Nimefurahia sana kwa wageni kusikia ile kitu wanaleta sehemu hii ile yenye sijawahi skia tangu nizaliwe . Sisi tukiwa hapa tunakaribishwa miradi yote tumefurahi. Kuna kitu ilikuwa inakuja kama msaada including telecommunication network. Tukauliza kama kuna kitu itakuwa inakuja kwa account ya community kila mwaka saa hii project itakuwa/namna gani? Plot mingi ni za watu or belongs to individuals, so how are you compensating us	This project is not structured to give annual compensation like Safaricom. This is a GOK/World Bank Project; there are legally defined procedures for different types of compensation including cash, in-kind and land for land. Land in Kanakurdio is community land

21 st January, 2022	Environmental and Social Impact Assessment.	Consultants MoE KPLC REREC	Land acquisition through compulsory acquisition (not voluntary land donation). Selection of three priority community projects, whereby one is to be implemented as in-kind compensation for land.	They requested the project proponent to equip community borehole and pipe of water to community water kiosk as apriority.	The proponent has set aside KES 1 million to implement the priority in-kind compensation project. The value of the project will be proportional to or greater than the value of land. NLC will determine the value of land.
May 2023	Compulsory Land Acquisition.	NLC	Site inspection and inquiries. Land valuation. Award of compensation.		

5. Institutional Responsibility for Implementation of the ARAP

Entity	Role
Ministry of Energy	<ul style="list-style-type: none"> Coordinate A-RAP implementation and provide budget for in-kind compensation.
National Land Commission	<ul style="list-style-type: none"> Implement the statutory process for compulsorily land acquisition, including site gazettement and inspections, inquiries, valuation, and award of compensation.
REREC	<ul style="list-style-type: none"> Monitor all land acquisition and compensation aspects (including A-RAP closure), complemented by a third-party monitor. Provide budgets for stakeholder engagement, grievance management, and monitoring, including the facilitation of the Land Acquisition and Compensation Implementation Committee, and the Grievance Redress Committee.
Mini-grid Contractor	<ul style="list-style-type: none"> Implement in-kind compensation concurrently with the solar mini-grid project.
Supervising Consultant	<ul style="list-style-type: none"> Monitor and report on implementation of in-kind compensation, and overall project compliance with social safeguards.
Grievance Redress Committees	<ul style="list-style-type: none"> Formed at the locational, county, and national levels, and responsible for resolving complaints, including A-RAP related grievances.
A-RAP Implementation Committee	<ul style="list-style-type: none"> Coordinate A-RAP engagements at the community level, monitoring A-RAP implementation and closure.
Affected Community	<ul style="list-style-type: none"> Responsible for the operation and maintenance (O&M) of in-kind compensation project. An agreement stipulating the O&M roles and responsibilities of the community will be effected.

6. Procedures for Grievance Redress

The Project procedures for grievance redress were established through a public consultation process and informed by the existing conflict resolution structures in the community. The Grievance Redress Mechanism (GRM) comprises tiers at the project, county, and national levels. *Refer to Chapter 7 of the ESIA for a detailed GRM.*

7. Implementation Timetable and Budget for the ARAP Implementation

7.1 Timelines

The proponent will commission the community project by May 25th, 2025, before operationalizing the mini-grid. The mini-grid contractor will implement the mini-grid and the community project simultaneously. The Supervision Consultant and IAs will implement a commitment register to ensure the mini-grid contractor can achieve the agreed-upon milestones. The register will be complete with clear and practical timebound indicators, which can be monitored by all parties – the PAPs, IAs, the Ministry, third-party monitor, and the Bank.

7.2 Budget

The proponent has set aside KES 1 million for the community project (budget captured in the ESMP). The compensation award from NLC and the Bill of Quantities will inform the final cost of the community project. The costs for in-kind compensation, stakeholder engagement, grievance management (including the facilitation of the GRCs and the A-RAP Implementation Committee), and monitoring are covered under the project.

10.5 APPENDIX 6 – NEMA FIRM OF EXPERT LICENSE



nema
nema gita yetu | alai weta | najike weta

FORM 7

(r.15(2))

**NATIONAL ENVIRONMENT MANAGEMENT
AUTHORITY(NEMA)
THE ENVIRONMENTAL MANAGEMENT AND CO-ORDINATION ACT
ENVIRONMENTAL IMPACT ASSESSMENT/AUDIT (EIA/EA) PRACTICING
LICENSE**

License No : NEMA/EIA/ERPL/18279

Application Reference No: NEMA/EIA/EL/23951

M/S Isaiah Kegora
(individual or firm) of address
P.O. Box 860 - 20200 Kericho

is licensed to practice in the

capacity of a (Lead Expert/Associate Expert/Firm of Experts) **Lead Expert
General**

registration number **1893**

in accordance with the provision of the Environmental Management and Coordination
Act Cap 387.

Issued Date: 12/30/2022

Expiry Date: 12/31/2023

Signature.....

(Seal)

**Director General
The National Environment Management Authority**

P.T.O.



ISO 9001:2015 Certified



nema
maring'u yeta / shai neta / wajibu weta

FORM 7

(r.15(2))

**NATIONAL ENVIRONMENT MANAGEMENT
AUTHORITY(NEMA)
THE ENVIRONMENTAL MANAGEMENT AND CO-ORDINATION ACT
ENVIRONMENTAL IMPACT ASSESSMENT/AUDIT (EIA/EA) PRACTICING
LICENSE**

License No : NEMA/EIA/ERPL/18263

Application Reference No: NEMA/EIA/EL/23929

M/S Norken International Limited
(individual or firm) of address
P.O. Box 9882 - 00100 NAIROBI

is licensed to practice in the
capacity of a (Lead Expert/Associate Expert/Firm of Experts) **Firm of Experts**
registration number **0181**

in accordance with the provision of the Environmental Management and Coordination
Act Cap 387.

Issued Date: 12/30/2022

Expiry Date: 12/31/2023

Signature.....

(Seal)

Director General

The National Environment Management Authority

P.T.O.

